



RG-IDP

V1.0

©2008

Ruijie
Networks

锐捷网络

Ruijie®



锐捷

锐捷®

实达网络 锐捷®

Red-Giant®


锐捷




Arial



2.



3.



Enter a

a

“ → ”

→

1+ 2
“ Alt ” “ A ”

Ctrl+Alt+A “ Ctrl ”

1 2 Alt F Alt
F

		3
		3
1		7
1.1		7
1.2		7
1.3		7
1.4		9
1.4.1	RG-IDP 500S	9
1.4.2	RG-IDP 500	9
1.4.3		

4.6.3	RD-IDP	36
4.6.4	RG-IDP	39
4.6.5	/ Plug-in	43
4.6.6	RG-IDP	44
4.7		44
4.8	RG-IDP	45
4.8.1	RG-IDP Server	45
4.8.2	RG-IDP Management Client	46
4.8.3		47
4.8.4		47
4.8.5		47
4.9	RG-IDP Console	48
4.9.1	Console	48
4.9.2	(Help)	49
4.9.3		49
4.9.4	(System)	50
4.9.5	(Device)	54
	MySQL	59

1

1.1

1.2

5-95%RH

0 -45

90-264VAC 47-63Hz/4-2A

1.3

1.

2.


3.

4.




1.4

1.4.1 RG-IDP 500S

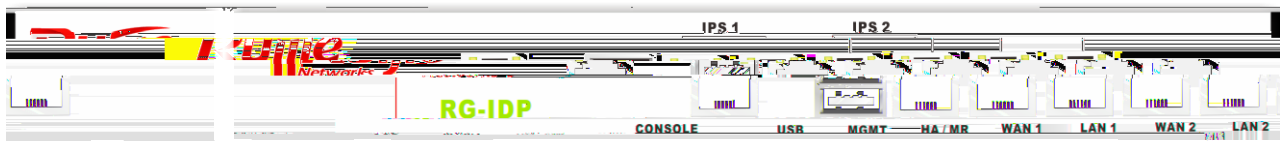


	1	2	3	4	5	6	7	8
	CONSOLE	USB	MGMT	HA/MR	WAN1	LAN1	WAN2	LAN2

1.4.2 RG-IDP 500

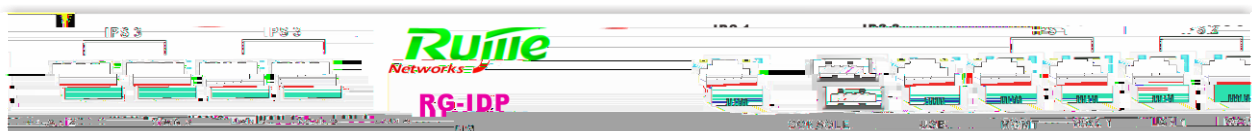

	1	2	3	4	5	6	7	8	9	10	11
	CONSOLE	USB	MGMT	WAN1	LAN1	WAN2	LAN2	WAN3			

1.4.3 RG-IDP 2000S

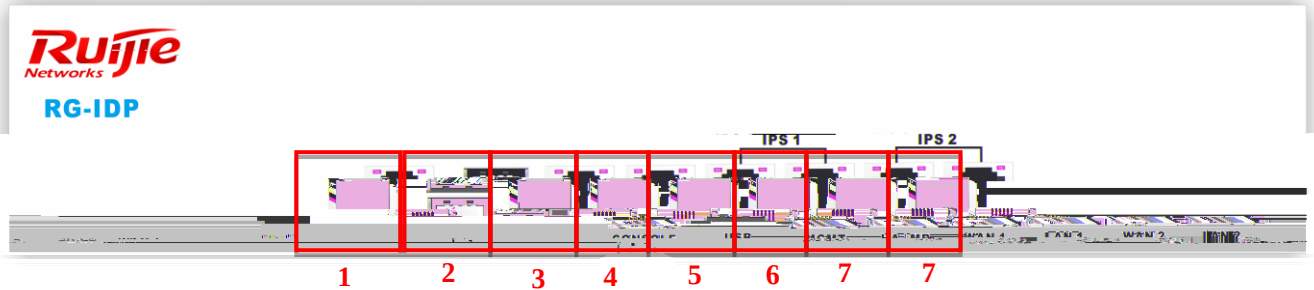

	1	2	3	4	5	6	7	8
	Console	USB	MGMT	HA/MR	WAN1	LAN1	WAN2	LAN2

Console ACE

USB

HA/MR

MGMT

LAN

WAN

LAN

WAN



2 RG-IDP

RG-IDP

RG-IDP

RG-IDP Server Plug-in


2.1 RG-IDP


RG-IDP




RG-

2.3 RG-IDP

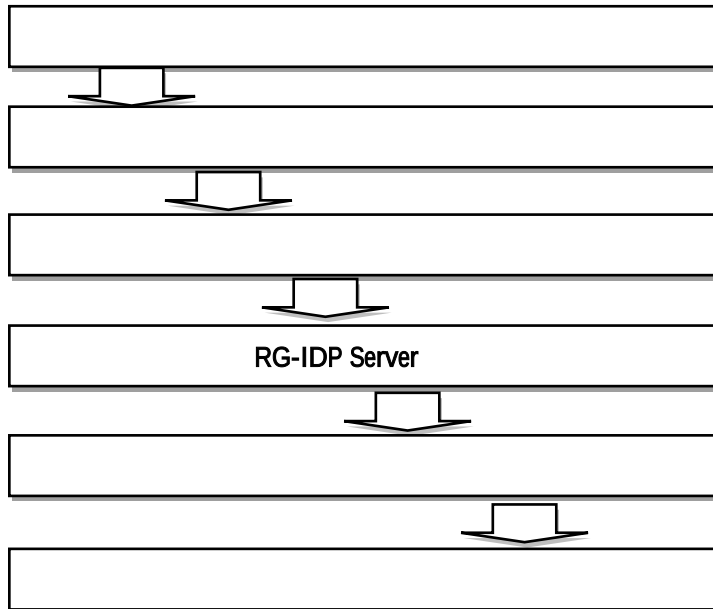

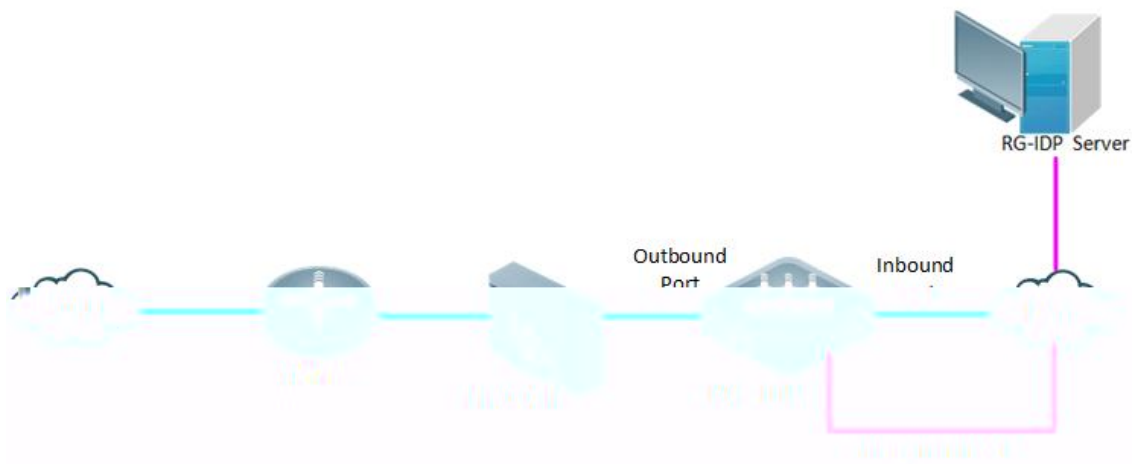

RG-IDP

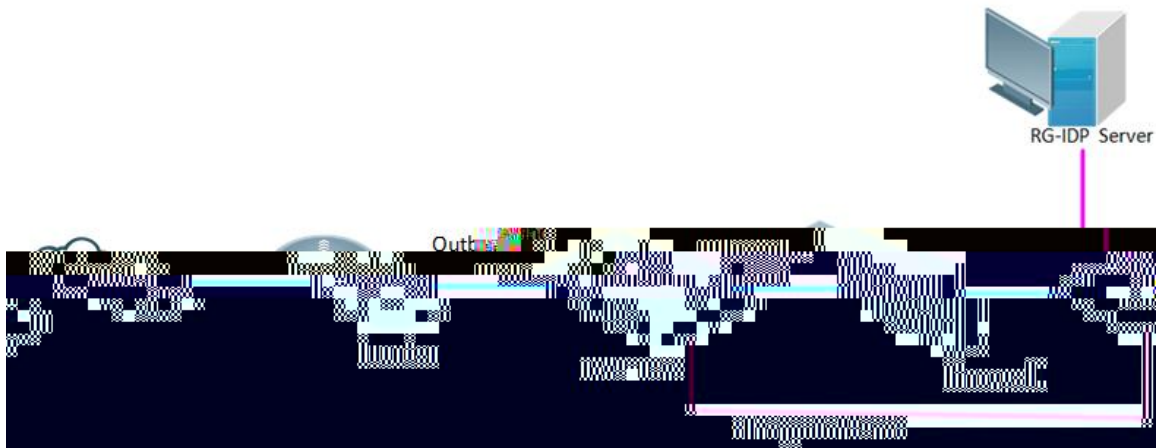

RG-IDP

3.3

server RG-IDP server RG-IDP Management RG-IDP



RG-IDP Server RG-IDP Management

3.4

RG-IDP
RG-IDP Server 6



4.3 RG-IDP Server



4.4



4.4.1 JRE





4.4.3 RG-IDP Server

RG-IDP Server Install

RG-IDP Server

RG-IDP Server Installation

RG-IDP Server

:


: <RG-IDP Server Install>

RG-



< IP >

3306)

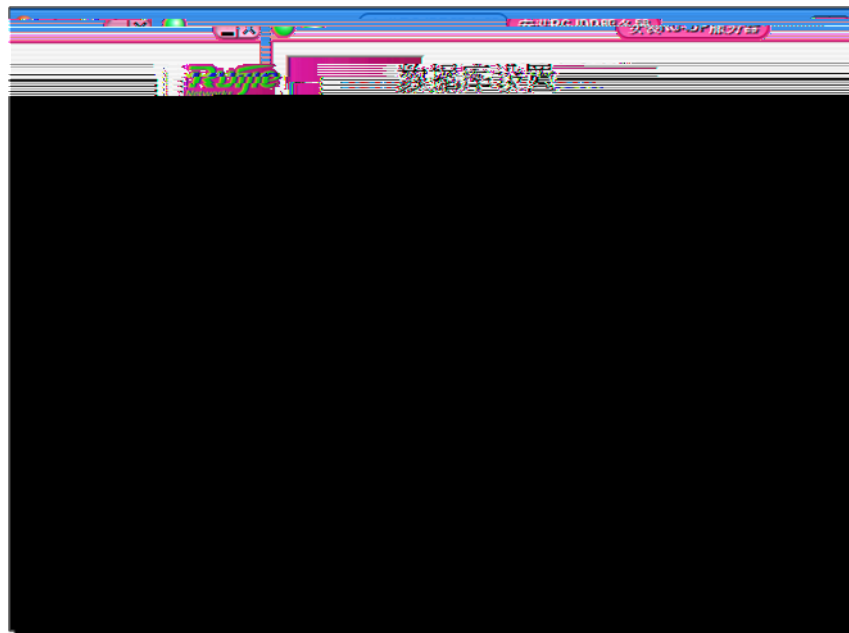


```

graph TD
    root --> MySQL
    root --> mysql
    root --> Mysql
    root --> <root>
    root --> <Next>

```

RG-IDP
RG-IDP

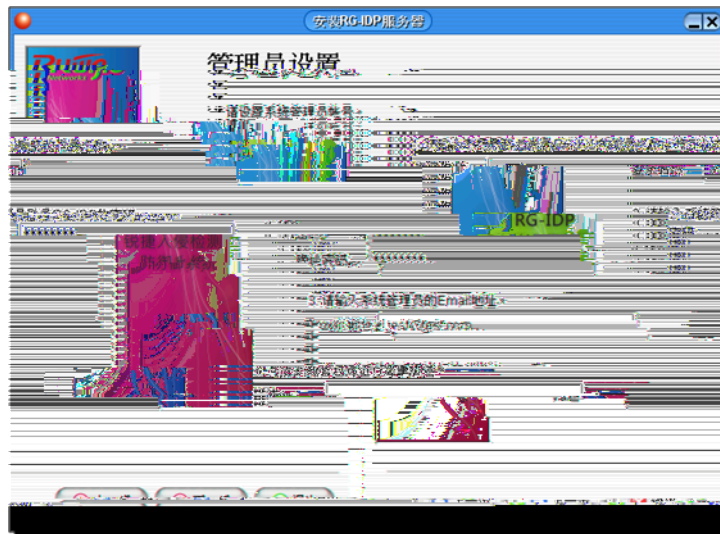


RG-IDP Server

RG-IDP

RG-IDP

:
:
duc.Ruijie.com
:
4



HTTP Server

RG-IDP Server HTTP Server
HTTP Server HTTP Server (
(80 port) RG-IDP Server HTTP Server IIS Apache,
HTTP Server,




(Internet Explorer)
<http://<RG-IDP server IP address>/RG-IDP/ > RG-IDP



```
(INFO  WARN  ERROR)>
>
Syslog      :      <syslog      IP      >      <localhost>
Syslog Facility:  syslog
:
(INFO)      :      7
(WARN)      :      30
(ERROR)
```



RG-IDP
(Login Retry Lockout)

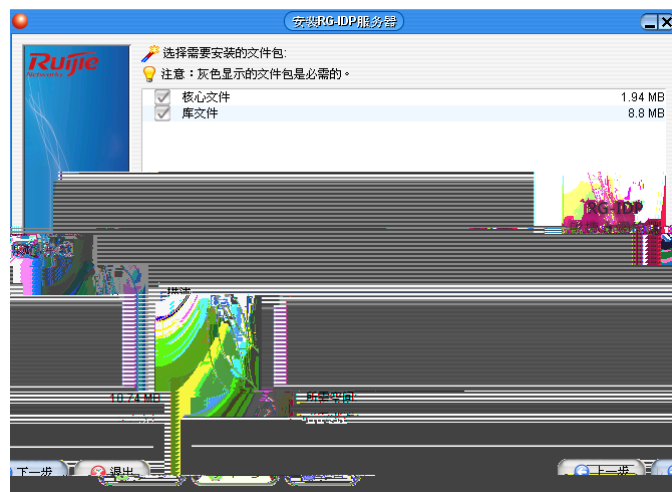

()

RG-IDP Server



RG-IDP Server

4.5 RG-IDP Server

RG-IDP Server


4.6.1

RG-



The image shows a 'User Properties' dialog box with the following fields and controls:

- 用户名: (Username) text input field
- 密码: (Password) text input field
- 确认密码: (Confirm Password) text input field
- E-mail: text input field
- 手机号: (Mobile Number) text input field
- 用户组: (User Group) dropdown menu showing 'admin group'
- 描述: (Description) text area
- Buttons: 确定 (OK) and 取消 (Cancel)




The image shows a dropdown menu for the 'User Group' field. The visible options are:

- admin group
- admin group
- configure group


Admin Group
Configure Group



4.6.3 RD-IDP

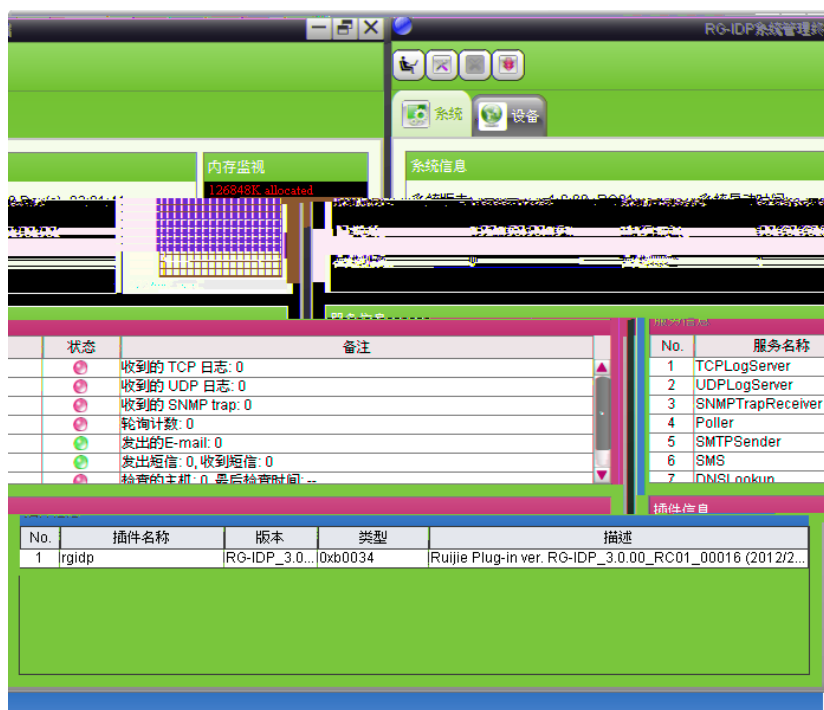


RG-IDP




6~32





Plug-in




RG-IDP



RG-IDP



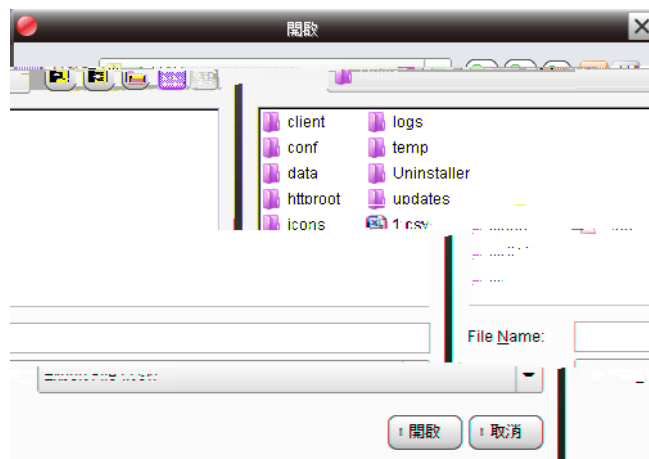



4.6.5 / Plug-in

	RG-IDP	RG-IDP	plug-In
	RG-IDP		

4.6.6 RG-IDP

RG-IDP Admin Console

Plug-in

Device



Device Profile



RG-IDP

<RG-IDP >

<RG-IDP IP >

(RG-IDP Server)

< >

< ok> RG-IDP

RG-IDP

RG-IDP

4.7

UTP (Cross-over UTP cable)

UTP (Through UTP cable)

RG-IDP

RG-IDP

:



RG-IDP

RG-IDP

RG-IDP

/

RG-IDP

WAN

RG-IDP



console

4.9.2 (Help)

Console

Arrow Key Enter Esc

{F1 | Help }

   	:
	Enter :
	Esc :

4.9.4 (System)

<S> (System)

::

All Status ():

Log ():

Password ():

Renew Port ()

SSL Support (SSL) SSL

Reset Config ():

Stop System (): RG-IDP

Reboot (): RG-IDP

(All Status)

System < | A}

Enter> {ESC | S | D}

:

: RG-IDP RJ_3.0.0_RC01_00031 S.1_11-8173_RELS_00003

Botnet RBL R.1_1108173_RELS_00003

: 30 21 2 2

: CPU 0% 0Mbps TCP 0

: 802,352KB 8,388,608KB CF Card 935.32 MB

952.41MB

: IP 10.24.97.77 255.255.255.0 10.24.97.254 DNS

192.168.168.228 RG-IDP 10.24.97.111

: TCP 1800 5 5000

(Interfaces)

RG-IDP

System

<{

|

|}


Enter>

{ Esc

| S | D }

UP

DOWN

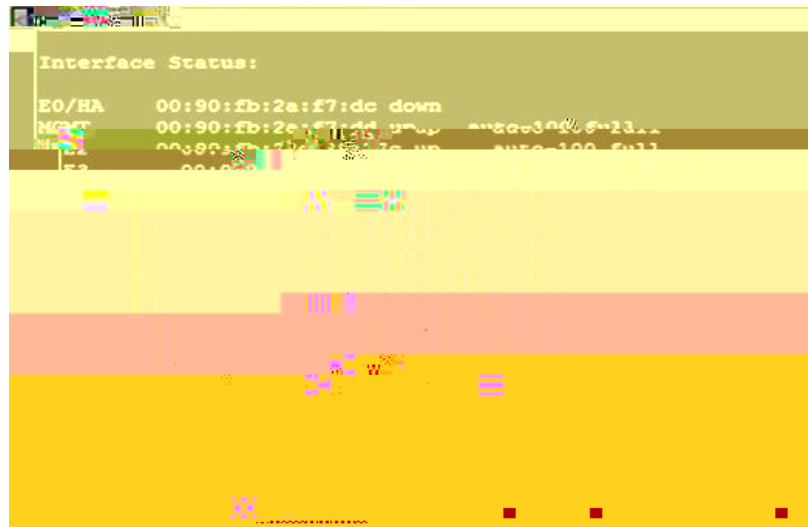

(Interfaces)

-1

(erro)

(drops)



(Interfaces)

-2

(Log)

System

<{

| L },Enter>

{

|

Enter}

{ Esc

| <S>

| <D>

}

(Log)

RG-IDP :

/ / : yyyy/mm/dd

/ / : hh/mm/ss

: Event level

: Event source

: Message

: (I:Info) (W:Warning) (U:Urgent) (F:Fatal) :
(CON:Console) SSH (SSH:SSH) (SYS:System) (PSS:Policy agent)

(Password)

RG-IDP System

Password changed successfully!

Password mismatch

SSL**(SSL Support)**

System < { | x } Enter>

RG-IDP Server

RG-IDP Server

(Reset Config)

System < { | E } Enter>
<Y> {N | Esc}

RG-

```
<S>system <D>evice

Device IP Address: 192.168.8.145

Device IPv6 Address: ::192.168.168.221

<Esc>Exit
```

(IP)

<Y> IP < IP Enter>
IP {N | Esc}

```
<S>system <D>evice

Device IP Address: 192.168.8.145

Device IPv6 Address: ::192.168.168.221

Are you sure you want to change IP? (y/N)

<Esc>Exit ...
```

(IP)

(Netmask)

RG-IDP Device <{ | M} Enter>
:

```
<S>system <D>evice

Device netmask: 255.255.255.0

Device IPv6 netmask: 32

<Esc>Exit
```

(Netmask)

(Gateway)

RG-IDP Device <{ | G}



Enter>

:

(Gateway)

```
<S>system <D>evice

Display connections: established
[1] Set display connection established.
[2] Set display connection total.
Set [1/2]:

<Esc>Exit
```

(Disp. Conn.)

RG-IDP

(RG-IDP Server)

RG-IDP	RG-IDP	Device	<{		B}
Enter>		RG-IDP			
<	RG-IDP	IP	Enter>		<Esc>
	:				

```
<S>system <D>evice

RG-IDP Server IP: ::192.168.50.13

<Esc>Exit
```

RG-IDP (RG-IDP Server)

(VLAN ID)

RG-IDP	ID	Device	{		V}	Enter>
	:					

```
<S>system <D>evice

VLAN ID: 0

<Esc>Exit
```

(VLAN ID)


PING

RG-IDP

Device

<Enter>

:



Ping

< Ping IP > <Enter>

IP

```
<S>system <D>evice

PING 192.168.8.140 (192.168.8.140): 56 data bytes
64 bytes from 192.168.8.140: icmp_seq=0 ttl=128 time=5.0 ms
64 bytes from 192.168.8.140: icmp_seq=1 ttl=128 time=0.2 ms
64 bytes from 192.168.8.140: icmp_seq=2 ttl=128 time=0.2 ms
64 bytes from 192.168.8.140: icmp_seq=3 ttl=128 time=0.2 ms
64 bytes from 192.168.8.140: icmp_seq=4 ttl=128 time=0.2 ms


--- 192.168.8.140 ping statistics ---
5 packets transmitted, 5 packets received, 0% packet loss
round-trip min/avg/max = 0.2/1.1/5.0 ms

Press any key to continue.


<Esc>Exit
```

PING


RG=IDP Server

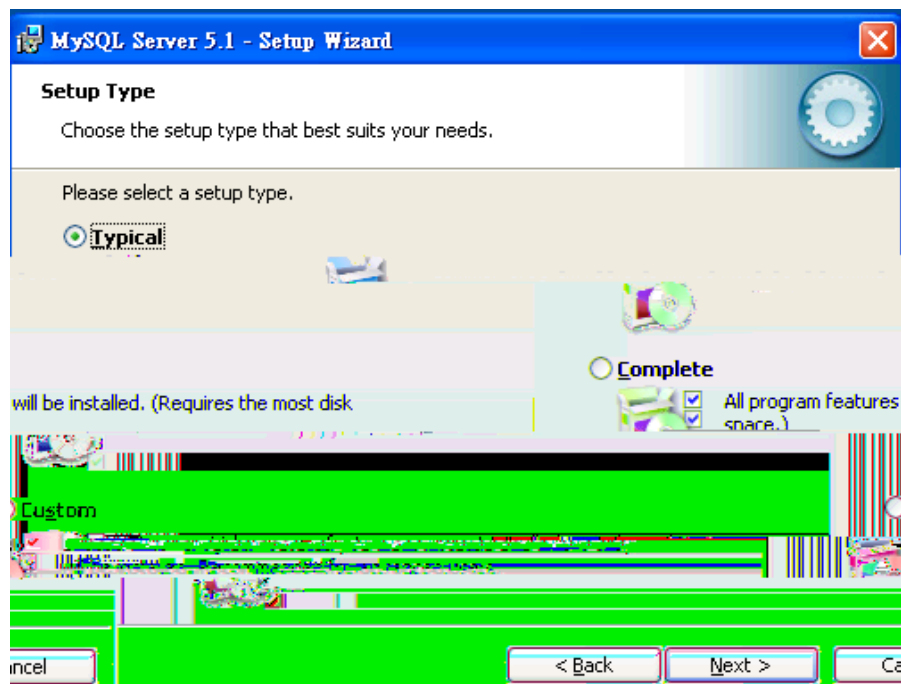


3. Ready to Install the Program <Install>

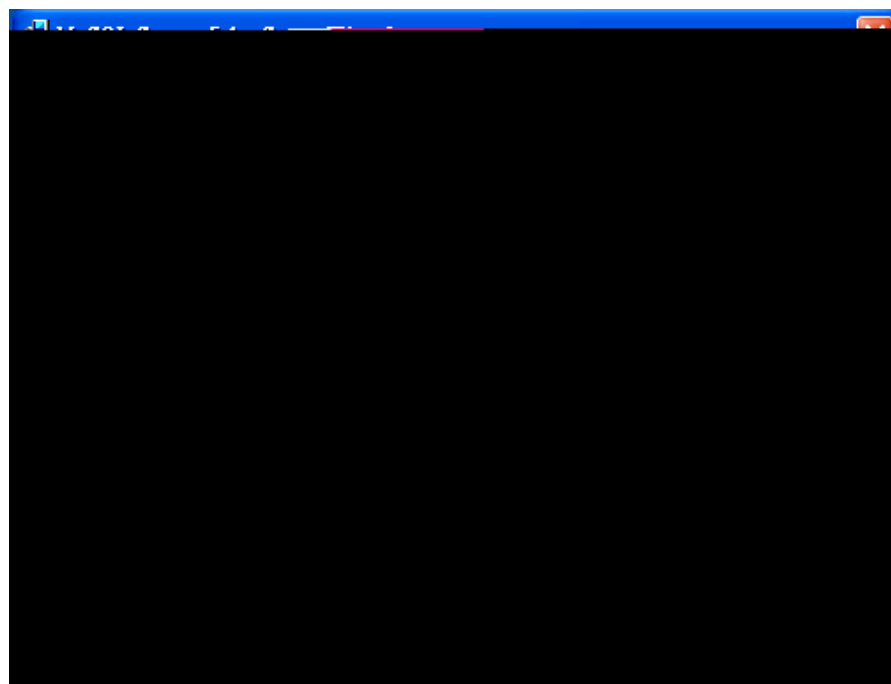


4. MySQL Enterprise MySQL Enterprise <Next>

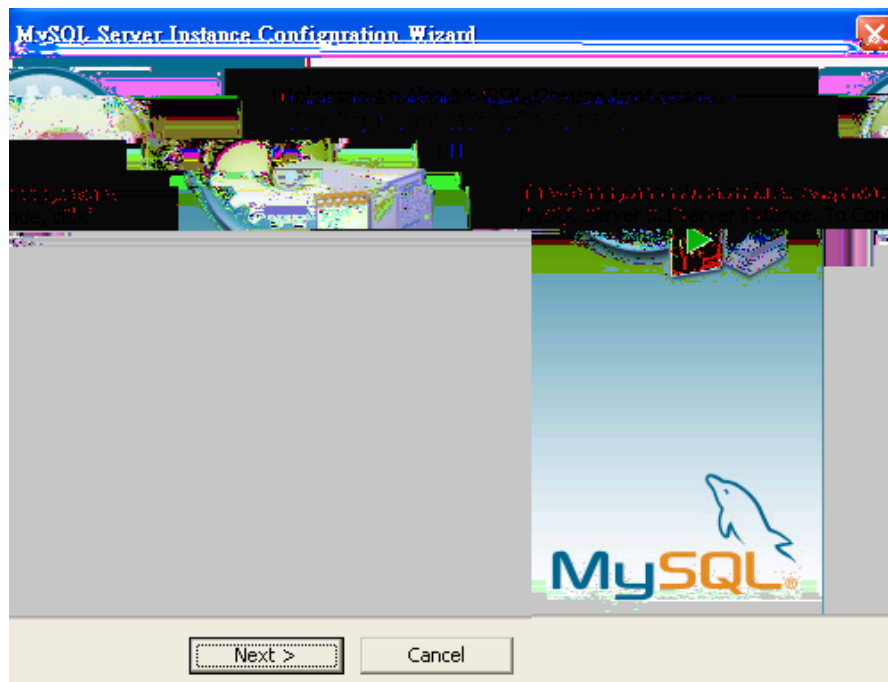


7. MySQL Server Instance Configuration <Detailed Configuration>




8. server type Server Machine <Next>

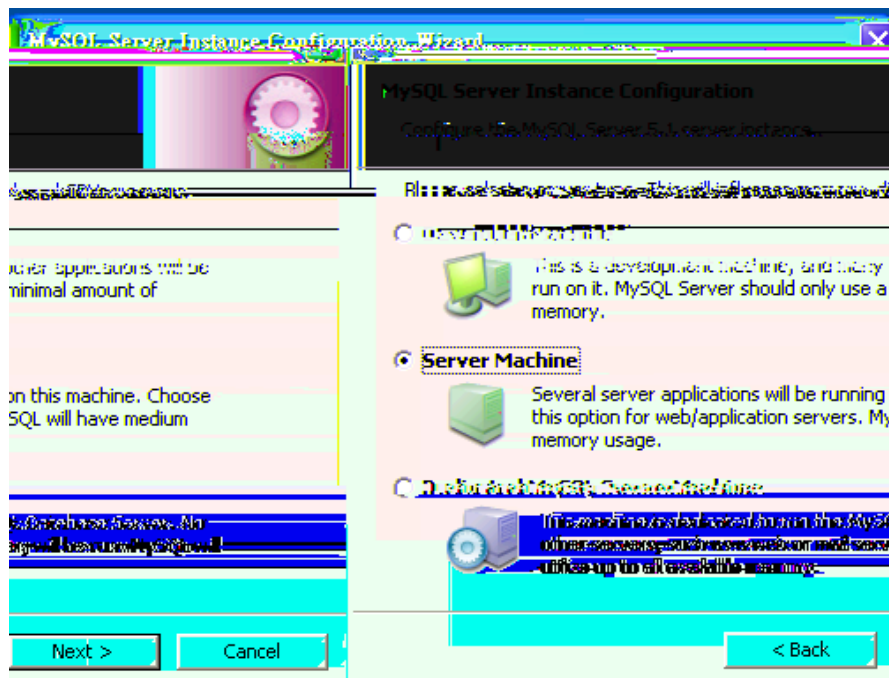


9. database usage **Non-Transactional Database Only** <Next>

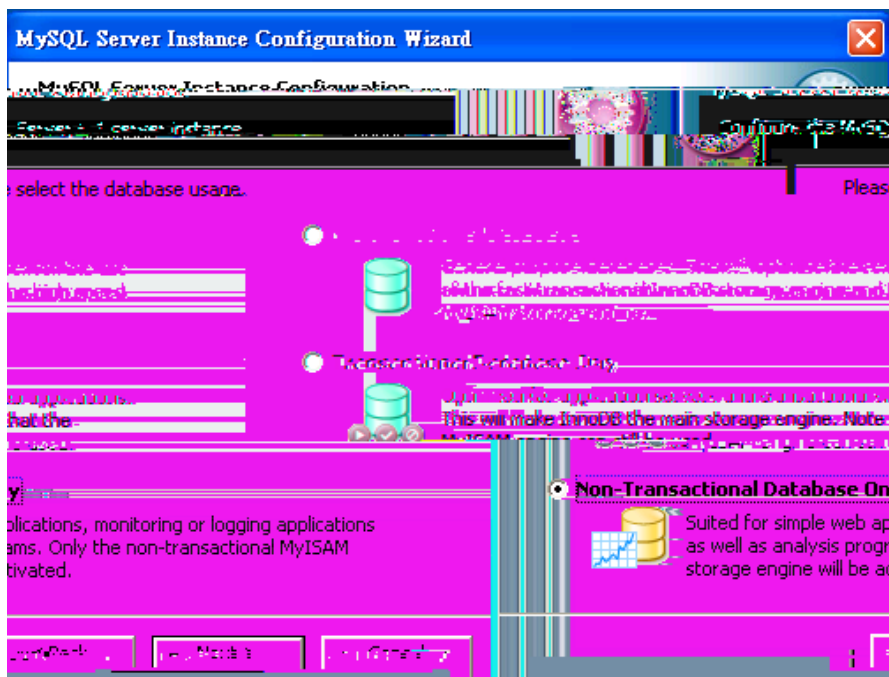

10. Approximate number of concurrent connections to the server **Decision**
Support (DSS)/OLAP <Next>

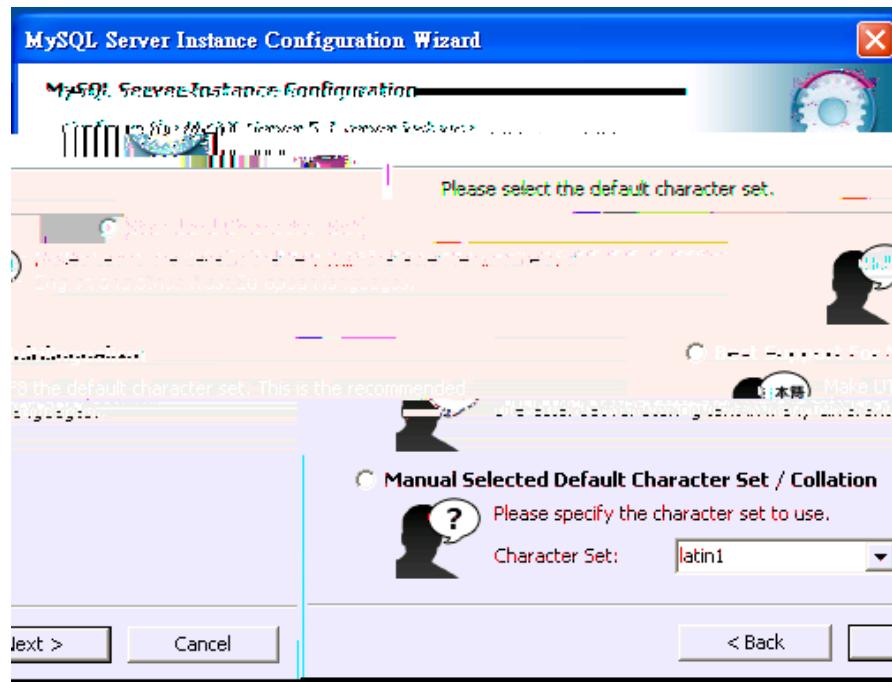

13. Windows options **Install As Windows Service** **Launch the MySQL Server automatically** **Include Bin Directory in Windows PATH.**



14. security options **Modify Security Settings** MySQL
root <Next>

15. Ready to execute <Execute>.

16. /

