




RG-WALL 1600-M5100

V1.4

©2013

1



Ruijie

RGOS®

RGNOS®

7× 24

<http://www.ruijie.com.cn/>

<http://webchat.ruijie.com.cn>

<http://www.ruijie.com.cn/service.aspx>

4008-111-000

<http://support.ruijie.com.cn>

service@ruijie.com.cn

1

RG-WALL 1600-M5100

IPSec SSL VPN Web
IPv4 IPv6 NAC SSL

RG-WALL 1600-M5100

RG-WALL 1600-M5100

1-1 RG-WALL 1600-M5100

RG-WALL 1600-M5100

1-2

1~7

1-2 RG-WALL 1600-M5100

#			
1	USB MGMT	USB-B	USB
2	MGMT	RJ-45	PC MGMT 1 Web UI

2

2.1

RG-WALL 1600-M5100

2.1.1

2.1.2

2.1.3

2.2.3

RG-WALL 1600-M5100

RG-WALL 1600-M5100

0°C-40°C	20%-90%

1.5M

0.4M

2.2.4

2.2.7 EMI

2.3

2.4


RG-WALL 1600-M5100

2.5

	2	USB	2	Console	8	4
		2 SFP				

3

3.1

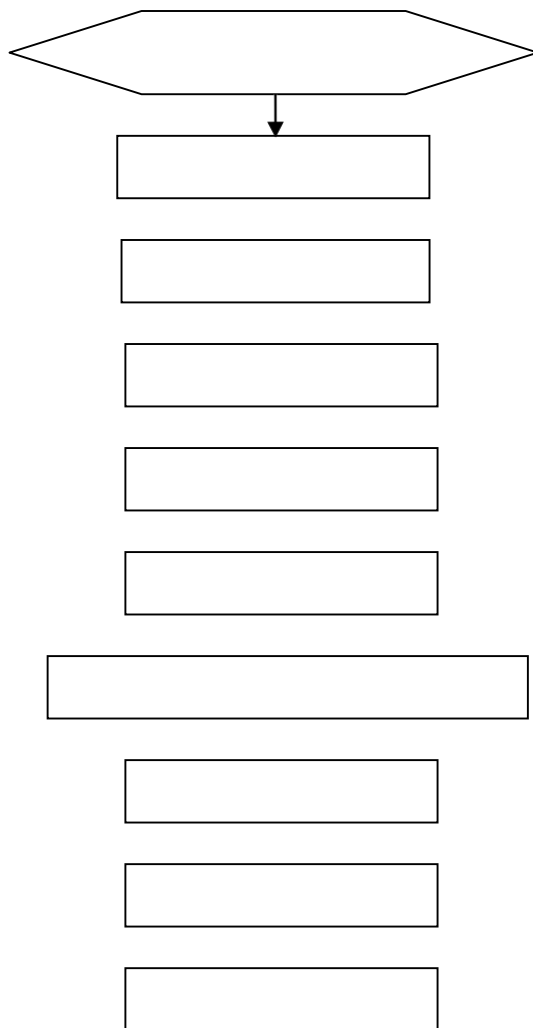

3.2

3.3

5mm

1.5cm

- 1)
- 2)
- 3)
- 4)

IEC60297 19
1RU=44.45mm(1.75inch) 1RU 3-1

RU Rack Unit


WALL 1600-M5100

RU

U

RG-

3-1

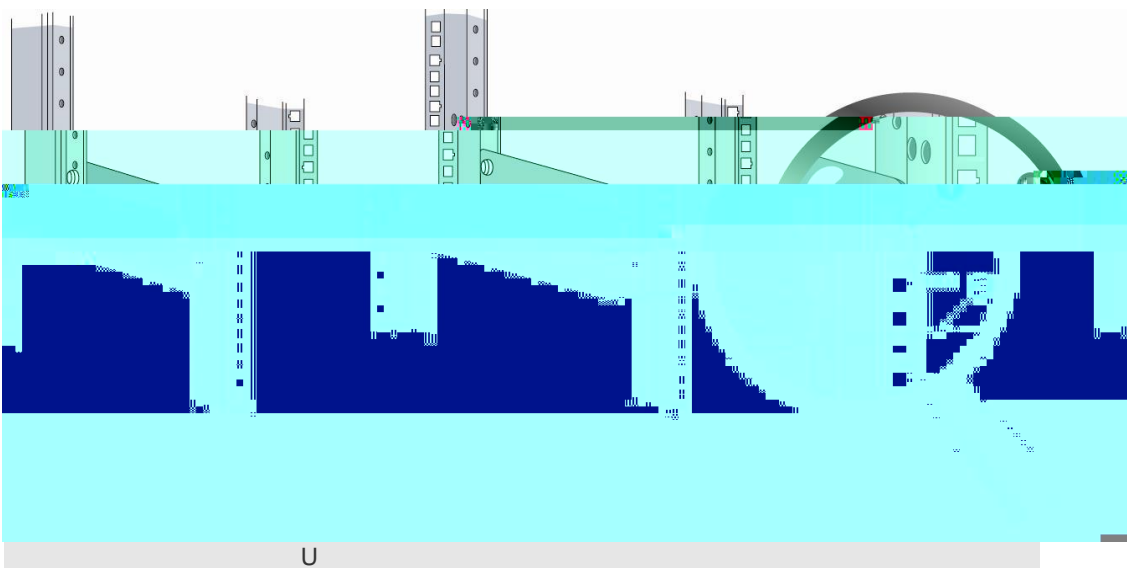

3.4

RG-WALL 1600-M5100

10mm

- 1) RG-WALL 1600-M5100
- 2) RG-WALL 1600-M5100
- 3) RG-WALL 1600-M5100 RG-WALL 1600-M5100

3.5

16A

- 1)
- 2)

3

1.5

14AWG


3.6



< >

4-4

4-3

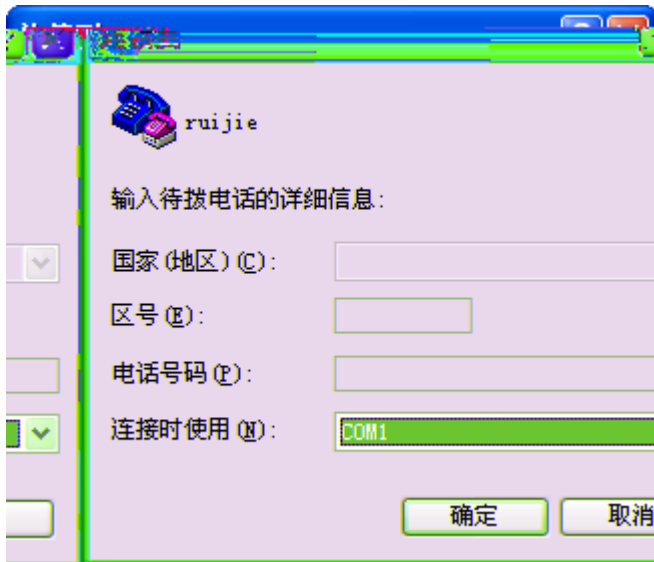

< >


4-5

8

1

9600

4-4

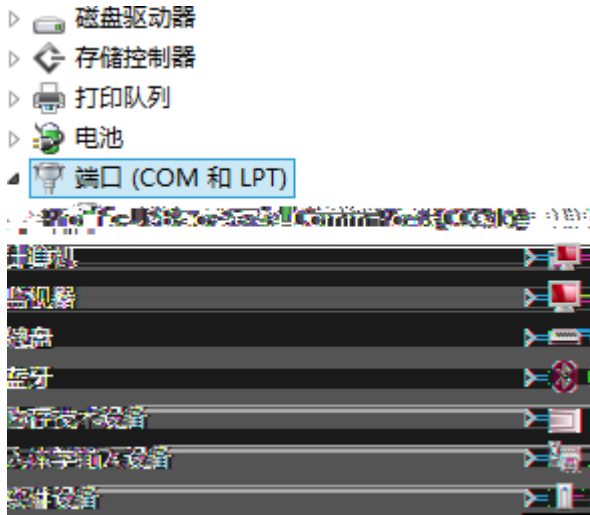


9600

8

1

1) %^+%[]^&+ Connect
%!\!+ 4-8

-%^, ^!+}

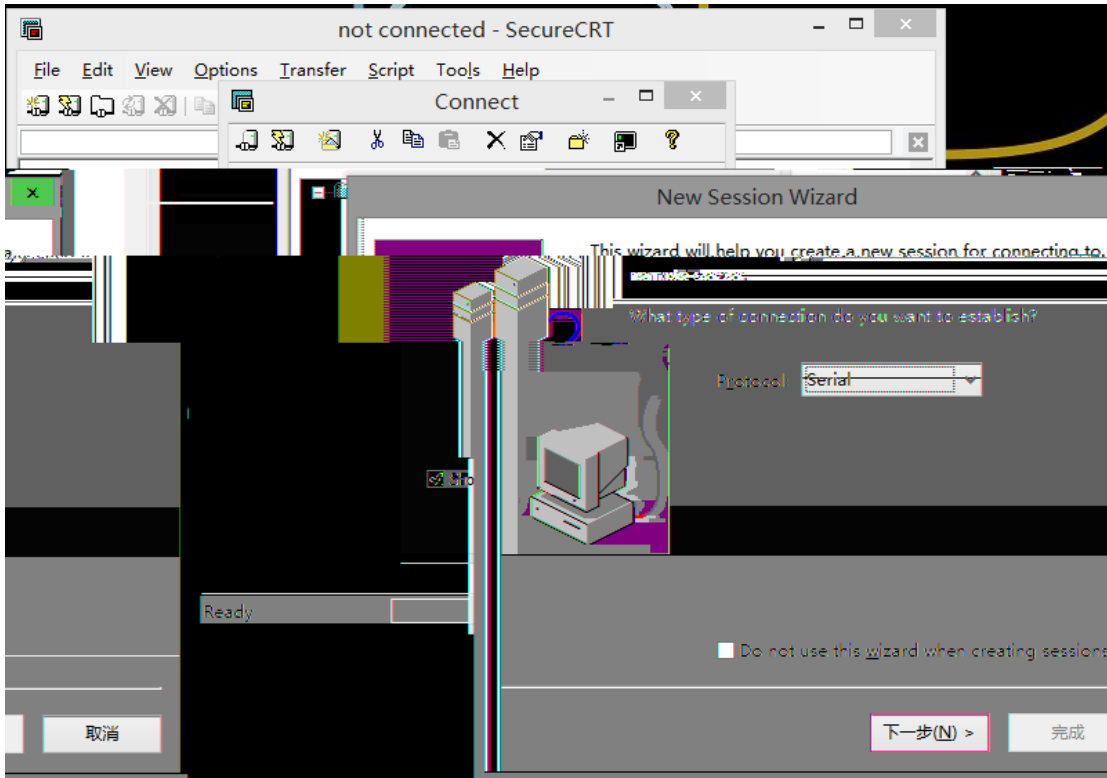

4-8


2) %o +! 4-9

4-10

4)

< >

4-11

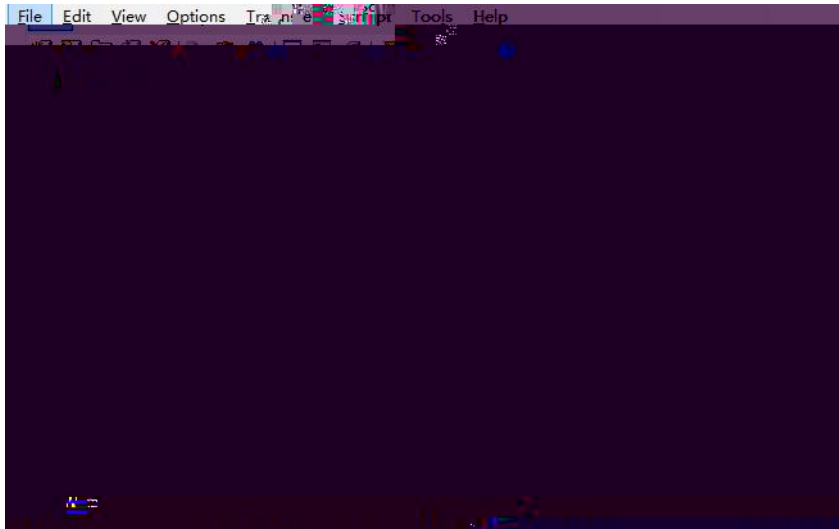

4-11

4.2

PC


5

5.1

RG-WALL 1600-M5100

6

6.1

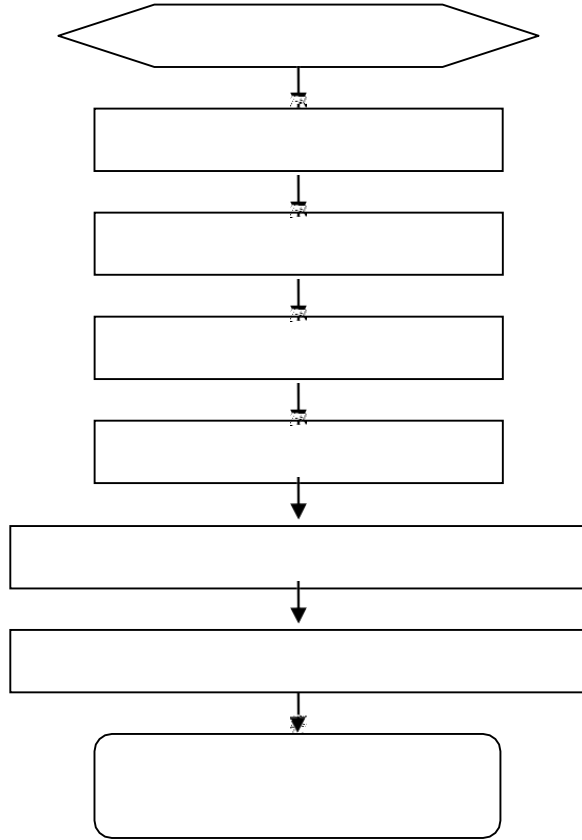

6.2

1


2

Status

Power

A

A 4

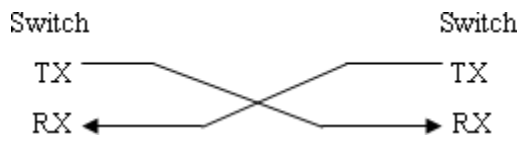

B

RG-WALL 1600-M5100


19

D-2



D-3

D-3

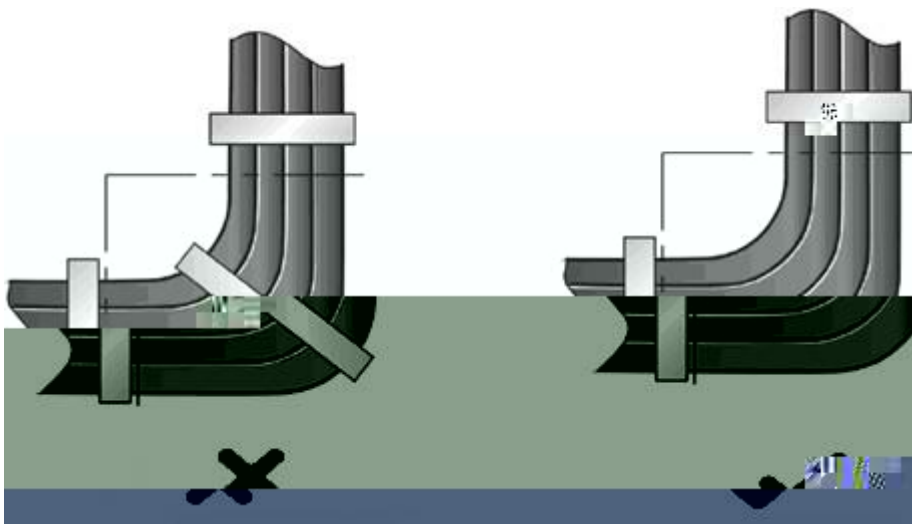

220V

-48V

D-4

D-4

