



RG-OAS


V1.1

- <http://www.ruijie.com.cn/>
- <http://webchat.ruijie.com.cn>
- <http://www.ruijie.com.cn/service.aspx>
- 7 × 24 4008-111-000
- <http://support.ruijie.com.cn>
- service@ruijie.com.cn





RG-OAS

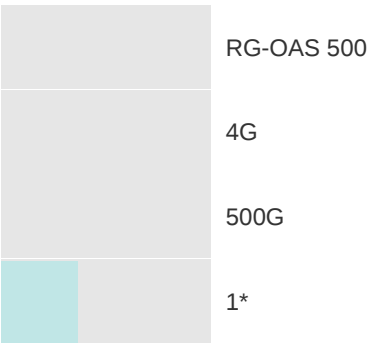


RG-OAS 500 1-2

1- 2 RG-OAS 500



1-2




<5s


	RG-OAS 1000
	4G
	1T
	1* RJ45
USB	2
	6*10/100/1000Base-T()
	350W
	1+1
	0 to




1-2



	RG-OAS 2000
	8G
	2T
	1* RJ45
USB	2
	6*10/100/1000Base-T()
	350W
	0 to 50°C
	-20 to 70°C
	10% 95% RH
	16.5kg
	2U 19 430mm(W)x500mm(D)x88mm(H)

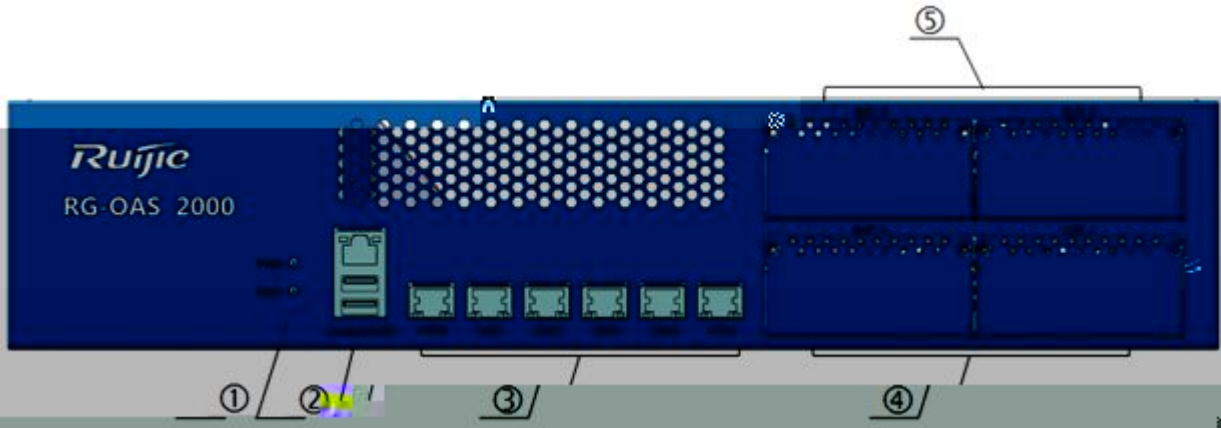


1-2



<5s

>=5s

	PWR		
	HDD		
		Link	10M
		Data	

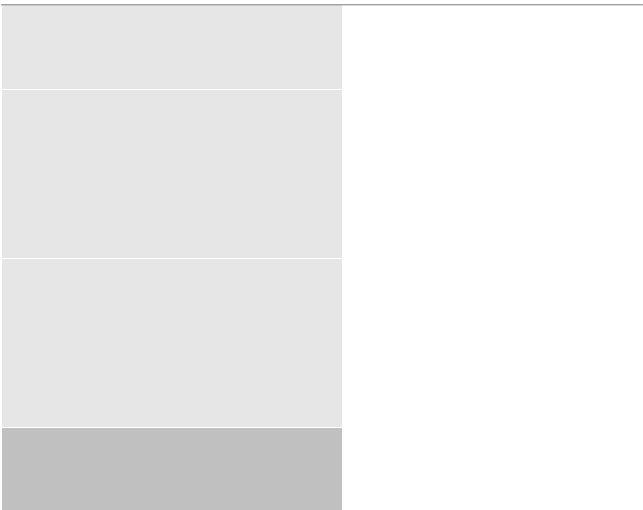

4-1

4-1






2) admin, admin 4-9

4-9



3) - - 4-10

4-10

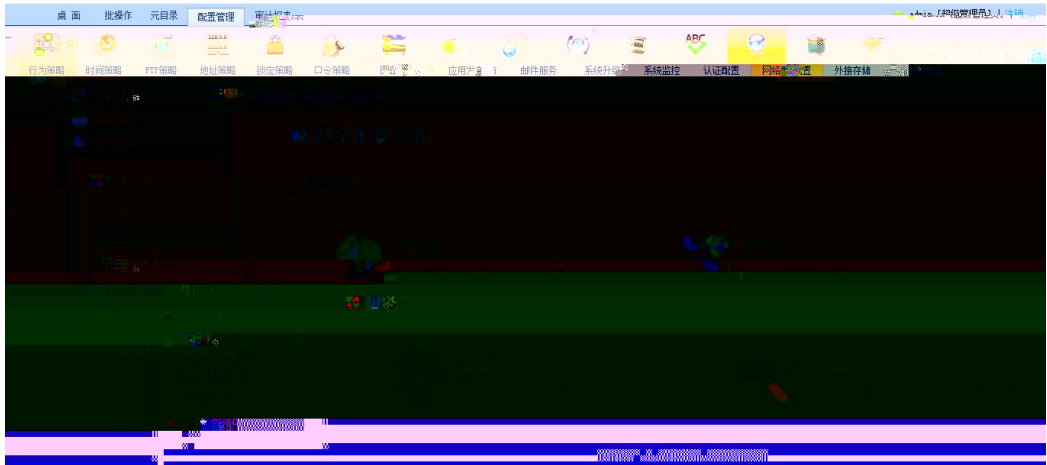

4) IP 4-11

4-11




■

1 IP https://192.168.23.91


4-12

4-12

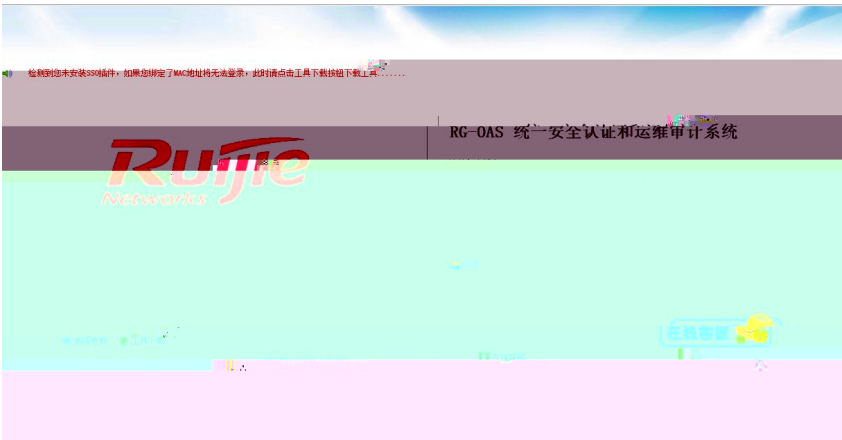


2 admin, admin 4-13


4-13

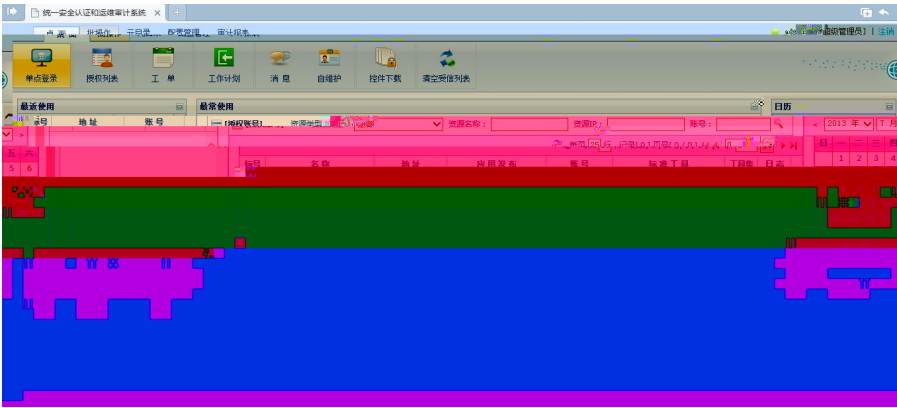


3 (¼ ñ ò ü é 6 ô

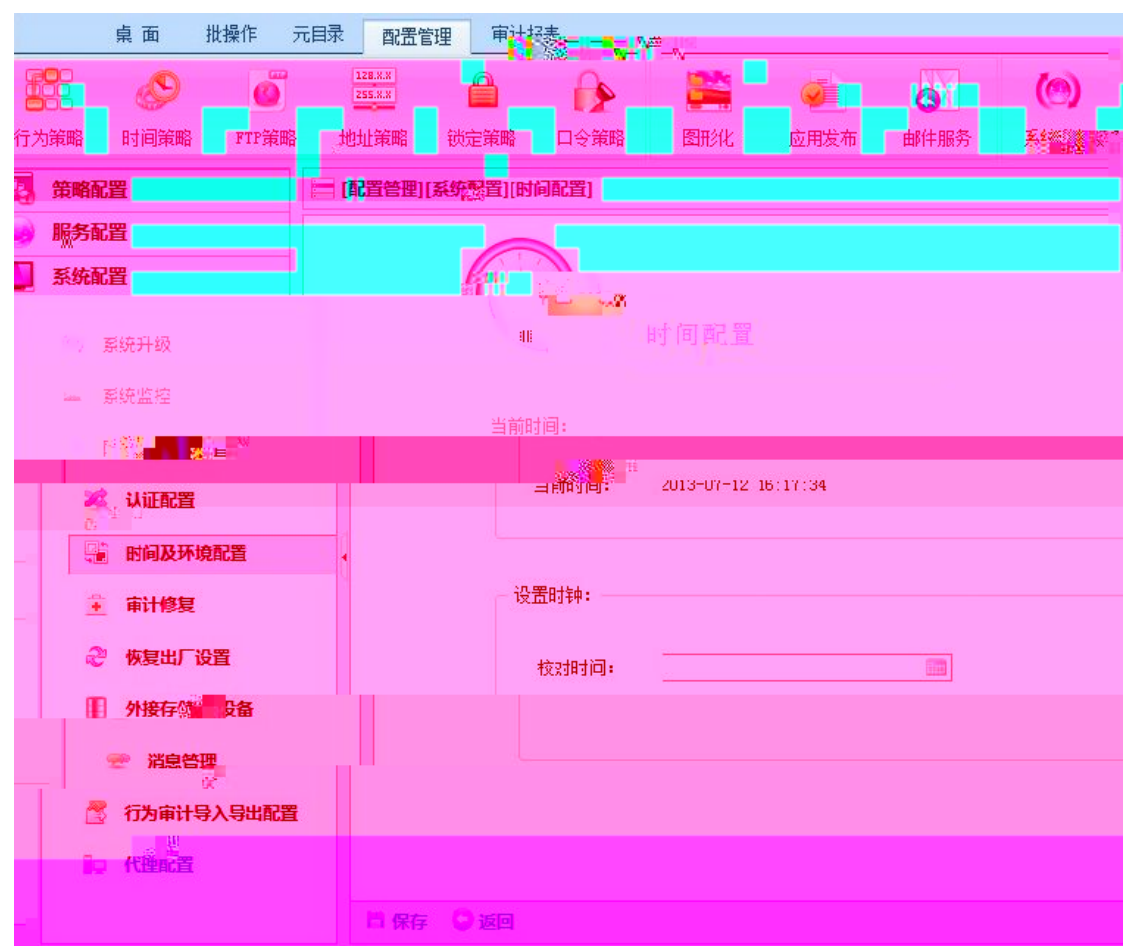

■ power

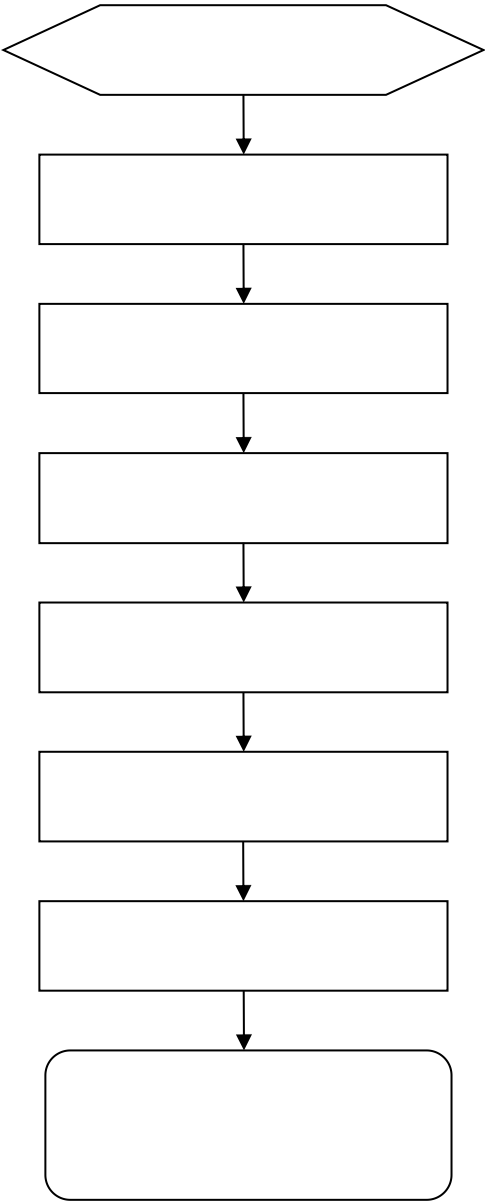

	IP	web
1	9600	81

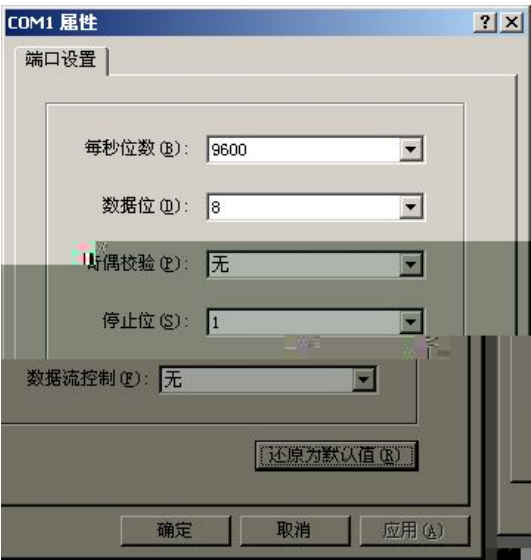

2	ruijie	ruijie
3	config ifa	IP
\$ config ifa	//	IP

config interfaces

eth0	Link encap:Ethernet HWaddr 00:0b:ab:55:fa:60	
	inet addr:172.18.10.115 Bcast:172.18.10.255 Mask:255.255.255.0	// eth0 IP
	inet6 addr: fe80::20b:abff:fe55:fa60/64 Scope:Link	
	UP BROADCAST RUNNING MULTICAST MTU:1500 Metric:1	
	RX packets:114426 errors:0 dropped:0 overruns:0 frame:0	
	TX packets:11843 errors:0 dropped:0 overruns:0 carrier:0	
	collisions:0 txqueuelen:1000	
	RX bytes:8675749 (8.2 MiB) TX bytes:9419377 (8.9 MiB)	
	Interrupt:23 Memory:fe7c0000-fe7e0000	
eth1	Link encap:Ethernet HWaddr 00:0b:ab:55:fa:62	
	BROADCAST MULTICAST MTU:1500 Metric:1	

