



RG-DDP

v1.0

©2013



---

RGOS 10.X (X)

- 

- 

- 

- 

- 

---

"

---

[ ] [ ]

{x|y|...}

[x|y|...]

//

2)



---

3)

- 
- 
-

---

.....	1-3
.....	1-1
.....	2-2
.....	2-2
.....	3-2
.....	4-3
.....	4-3
.....	4-5
.....	4-5
.....	4-6
.....	5-7
.....	5-7
.....	5-7
.....	6-8
.....	6-8
.....	6-8
.....	6-8
.....	6-11
.....	7-12
.....	7-12
.....	7-13
.....	7-13
.....	7-14
.....	8-14
.....	8-14

# 1 WEB



WEB

WEB

WEB



## 2

- WEB WEB WEB PC
- Google Firefox IE9.0 IE QQ Maxthon  
WEB
- 1024\*768 1280\*1024 1440\*960


## 3 WEB

IP http://192.168.1.200,



3-1

" "

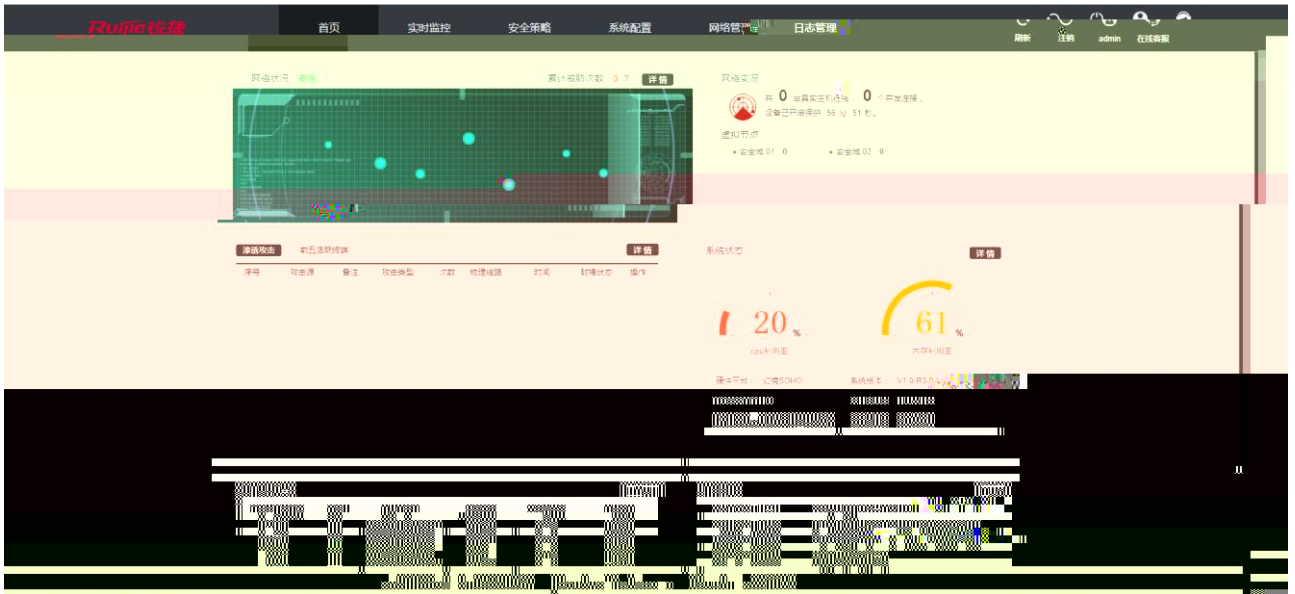


3-2 WEB

## 4

### 4.1



id	username	role	password	status	login_type	actions
1	admin	超级管理员			DKey登陆	删除 写入
2	admin	管理员			口令认证	删除 修改

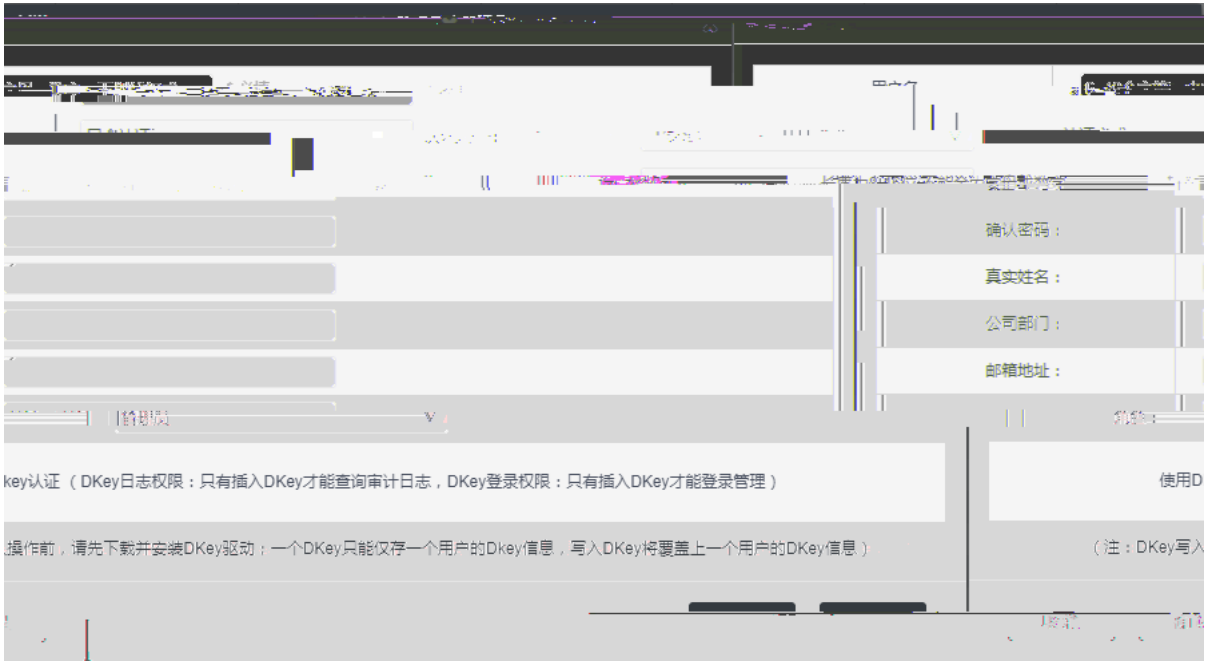


4-1



4-2



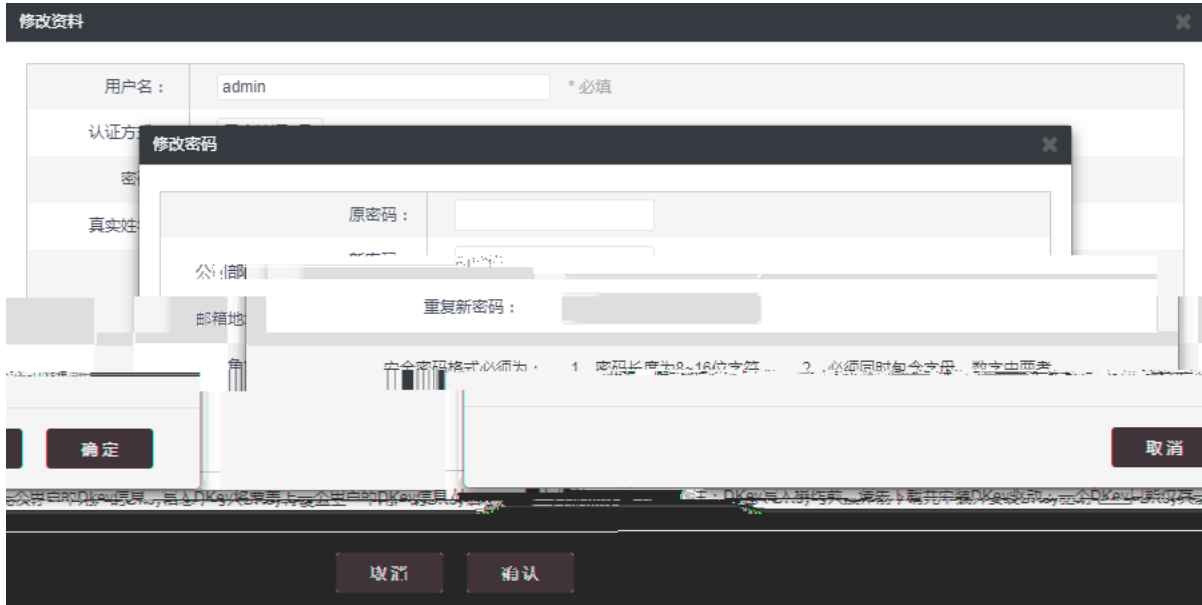

4-3


## 4.2



4-4

## 4.3



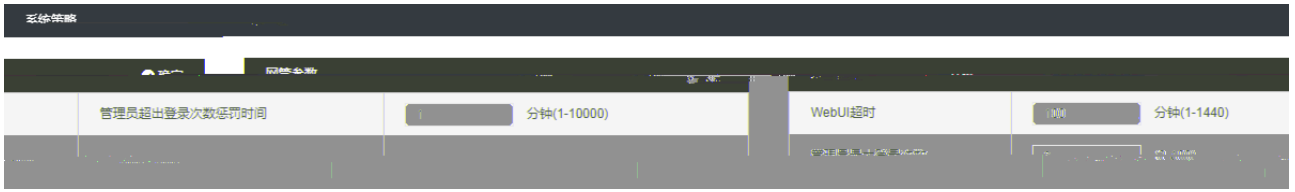

4-5

WebUI	5	5		
		3		3
			10	10



4-6

IP 192.168.1.20 192.168.1.20



IP

IP

## 4.4



>

IP



4-7

IP

## 5

### 5.1

IP

IP

IP

IP

IP

>




5-1

IP

### 5.2



>

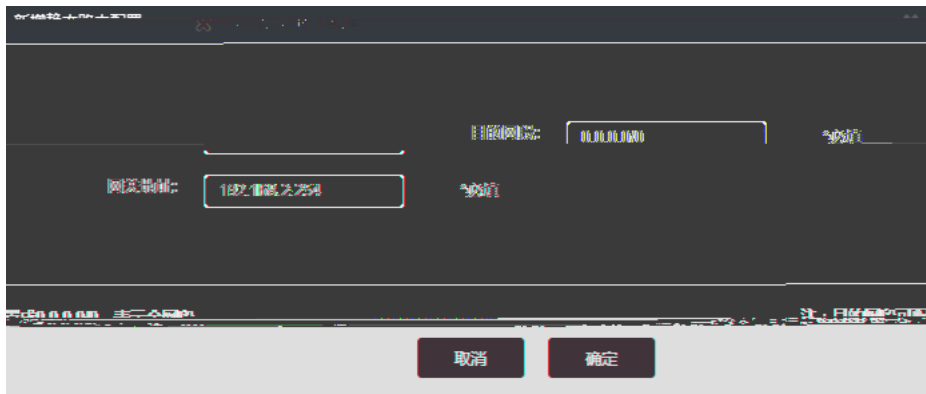

192.168.2.100

0.0.0.0/0

192.168.2.254

IP web




## 6

### 6.1

RG-DDP  
access

WAN

trunk

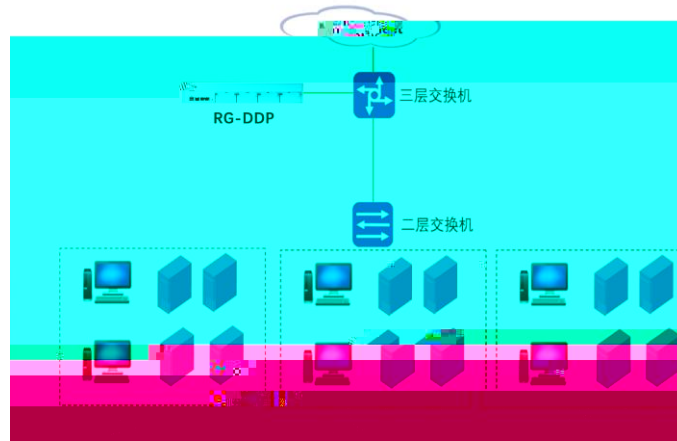

#### 6.1.1

1. RG-DDP
- 2.
- 3.
- 4.

#### 6.1.2

RG-DDP

https://192.168.1.200

https://192.168.2.200

admin

admin

RG-DDP

工作模式：  
 串行模式  旁路模式

间隔探测：  s(秒) (值：0 或 5-100的整数，0表示不学习)

立即学习

编辑外部IP网段配置

网段:  \*必填

掩码:  \*必填

网关地址:  \*必填

VLAN:  \*必填(0~4094的整数)

物理线路:  \*必选

探测IP1:  \*选填(必须为空闲可用IP)

探测IP2:  \*选填(必须为空闲可用IP)

取消 确定


VLAN	access VLAN ID 0 turnk VLAN ID VLAN ID VLAN ID

)




--	--


IP - - IP .

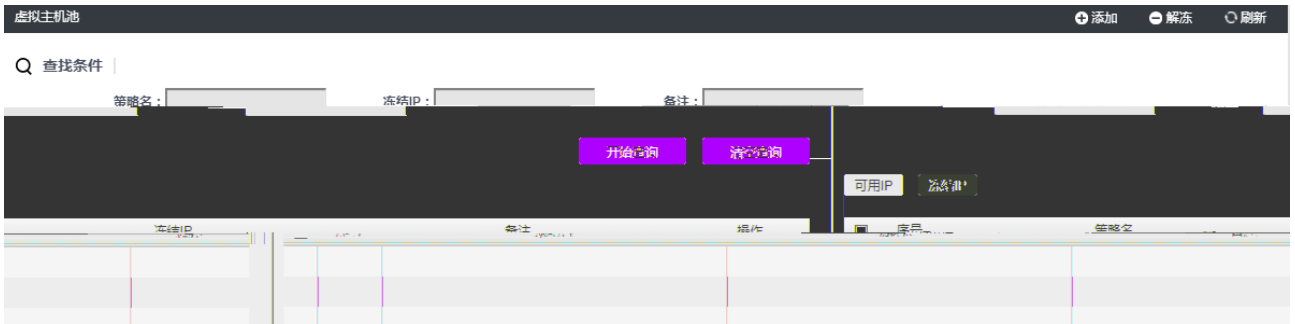

## 6.2

ip " " IP "

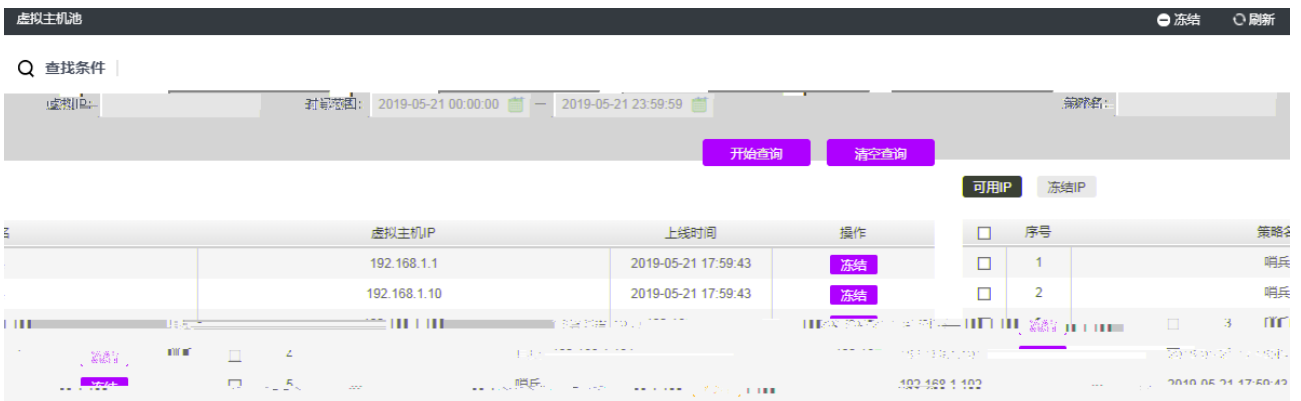

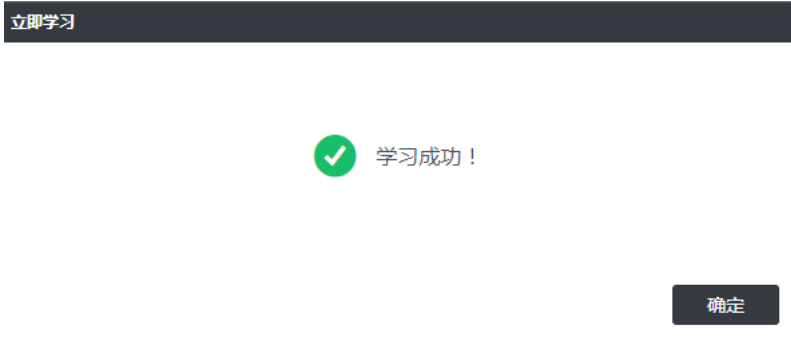

IP

可用IP	冻结IP
192.168.1.101	192.168.1.102
2019-05-21 17:59:43	2019-05-21 17:59:43
冻结	冻结
2	3
哨兵	哨兵
192.168.1.10	
4	5
哨兵	哨兵

RG-DDP

IP

IP

IP

可用IP	冻结IP
1	
哨兵	
192.168.1.10	




RG-DDP  
)

(


## 7 RG-DDP

### 7.1

CPU

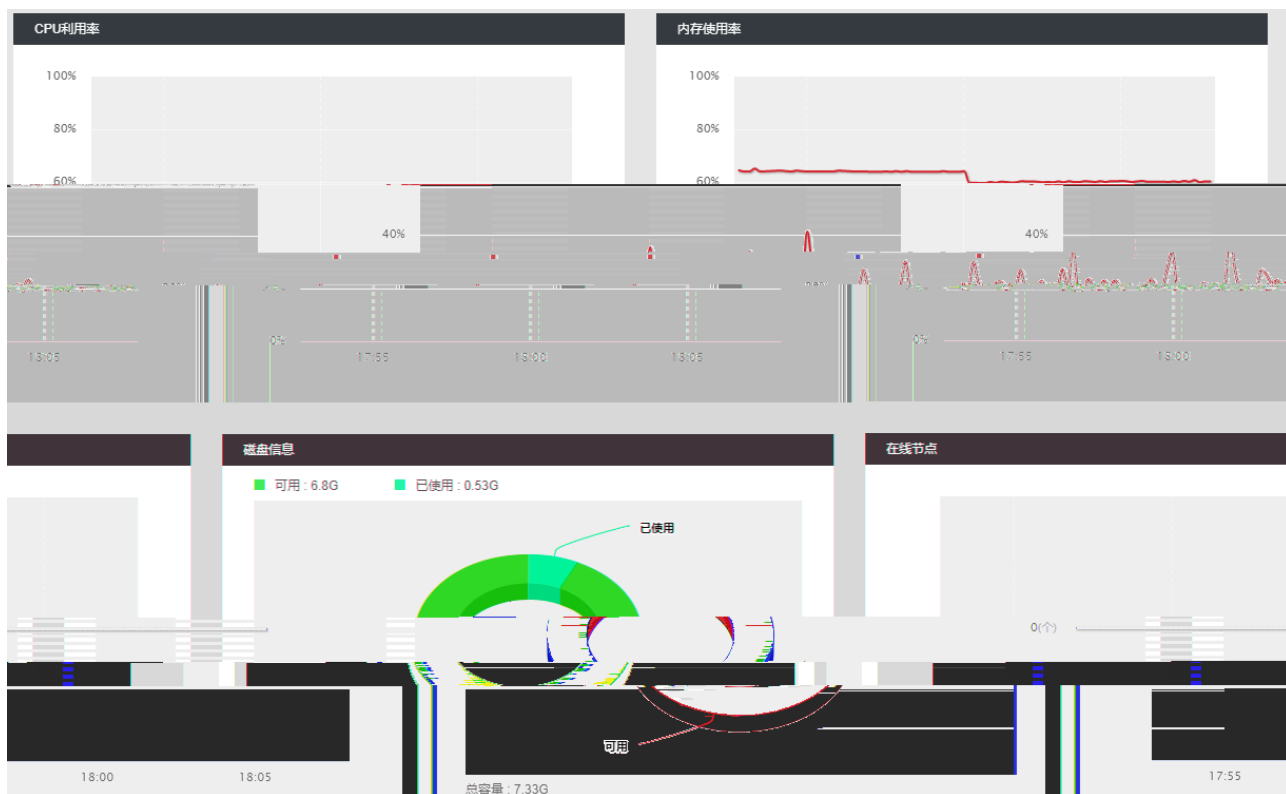

## 7.2

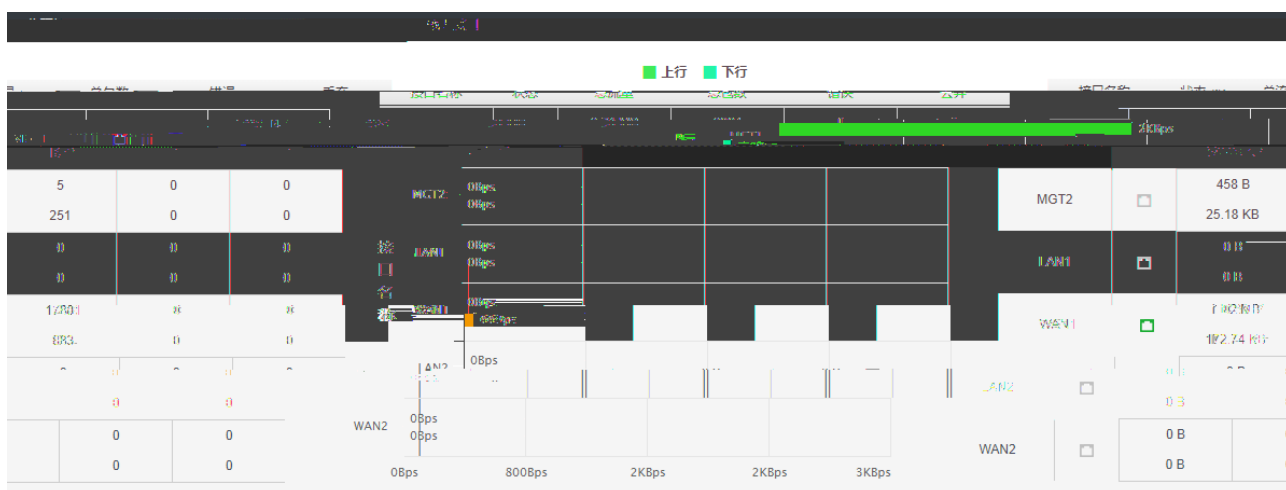

## 7.3


35G)5D

关机/重启

操作	配置选项
<input type="button" value="确定"/>	重启/关机 <input type="radio"/> 重启 <input type="radio"/> 关机 (提示: 电源延迟开关, 长按5秒关机)

---

4		
5		



2.

- DHCP
- DNS 114.114.114.114 ( )
- DNS 8.8.8.8 ( )
- 
- IP
- 
- IP 1m
- 1m
- 4m


3. " "

### 8.1.3.2.3

1. → → IP



2. " "

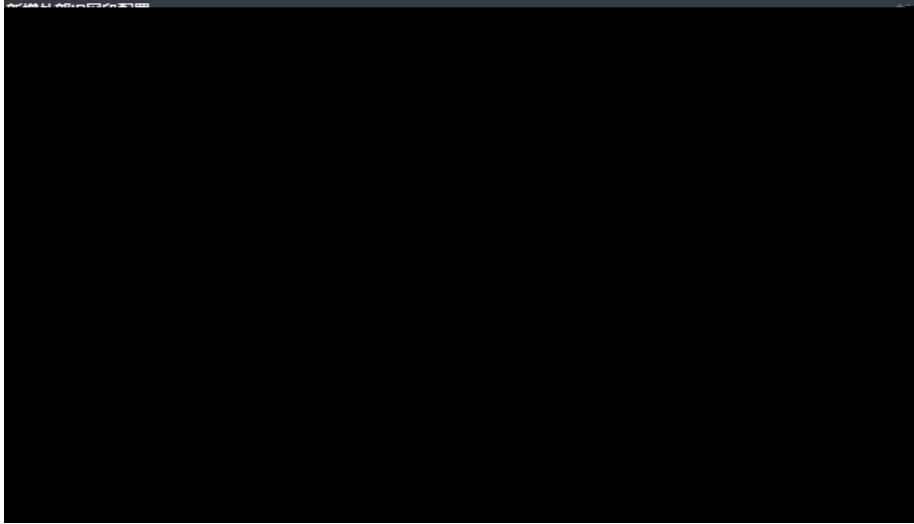

3. ( IP)

---

### 8.1.3.2.5

1.                    →                    →

**新增冻结IP配置**

冻结IP:

策略:

备注:

2.

IP      VLAN                      IP                      VLAN

VLAN                      IP                      IP

### 8.1.3.2.7

工作模式 确定

工作模式:  串行模式  旁路模式

间隔检测:  s(秒) (值: 0 或 5-100的整数, 0表示不学习)

### 8.1.4