



RG-IIB-N86KS

目录

安全使用说明事项.....	1
装箱清单.....	3
接口连接说明.....	3
面板按键说明.....	6
OPS电脑安装.....	7
遥控器.....	8
基本操作说明.....	8
产品	
软件升级.....	28
简单问题的处理方法.....	28
技术规格.....	29
产品中有毒有害物质或元素的名称及含量.....	30

安全使用说明事项

1. ---
2. ---
3. ---
4. ---
5. ---
- 6.
- 7.
- 8.
9. 24
- 10.
- 11.
12. (-)
-20°C 60°C
0°C 40°C
- 13.
- 14.
15. >2.5cm >10cm >10cm
- 17.
- 19.
- 21.
- 22.
- 23.
- 24.
- 25.
- 26.
- 27.
- 28.
- 30.


32.

*


36.

/

装箱清单

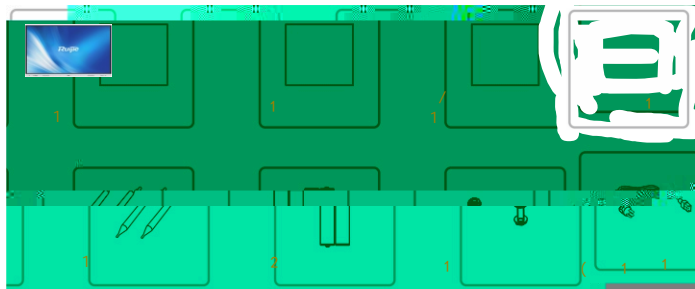


接口连接说明

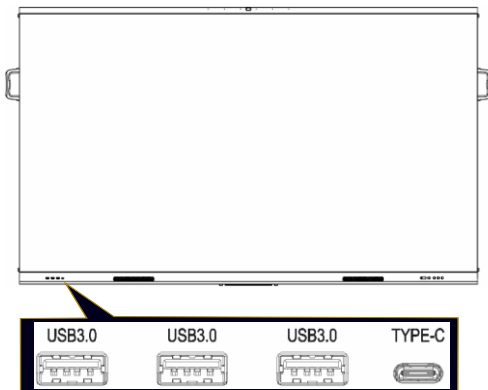

接口连接说明

1




2



● AUDIO-IN



● TOUCH



◆ TOUCH USB

TOUCH USB

● HDMI-I N



◆ HDMI
EDI D2.0
HDMI 1


4K@60Hz, 5 4K@60Hz 时 <1s EDI D





EDI D

接HDMI1接口。

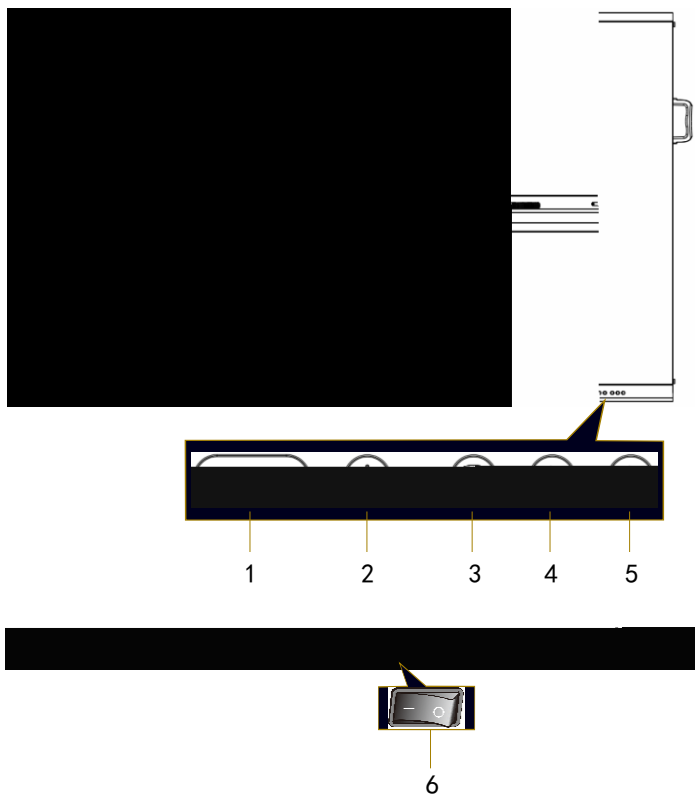

面板按键说明



1. [Redacted]
2.  : [Redacted] ;
3.  : [Redacted] ;
4.  : [Redacted] ;
5.  : [Redacted] ;
6. [Redacted] 。


窗；

OPS电脑安装

CPS

■ OPS

CPS

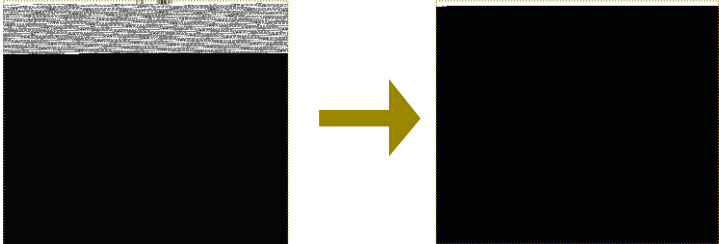


CPS

CPS

CPS


,

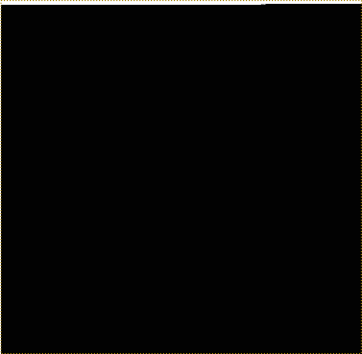


CPS


CPS



。

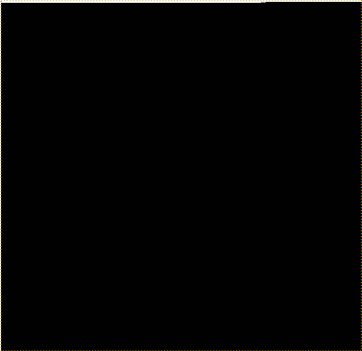

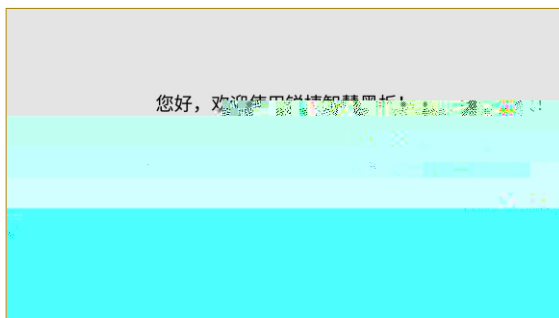


QPS

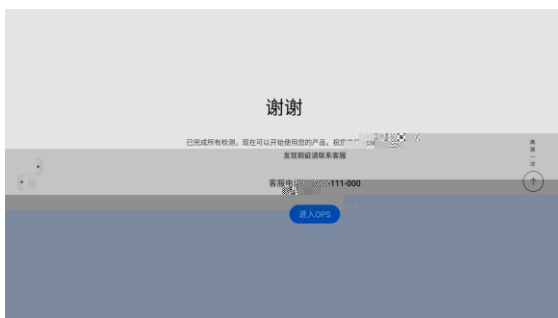

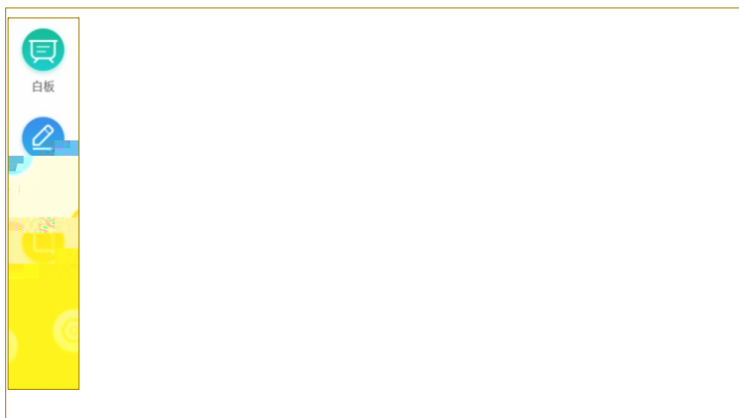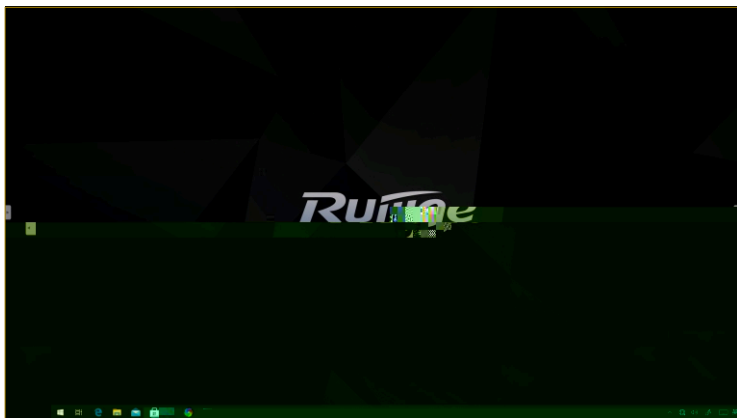


- 1.
- 2.
- 3.
- 4.
- 5.

基本操作说明

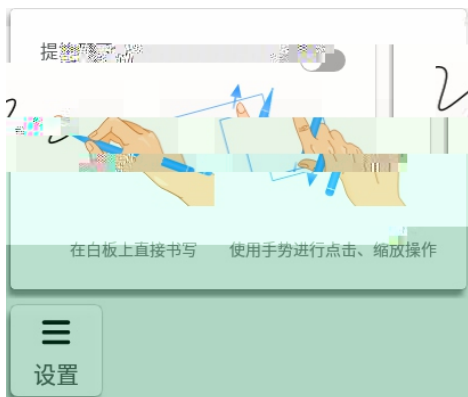

- 1.
- 2.

30%-500%

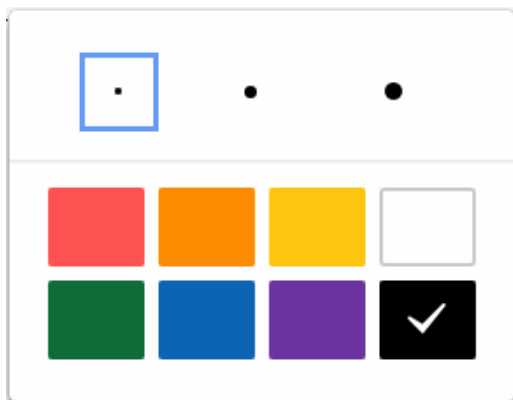




1.



2.




基本操作说明

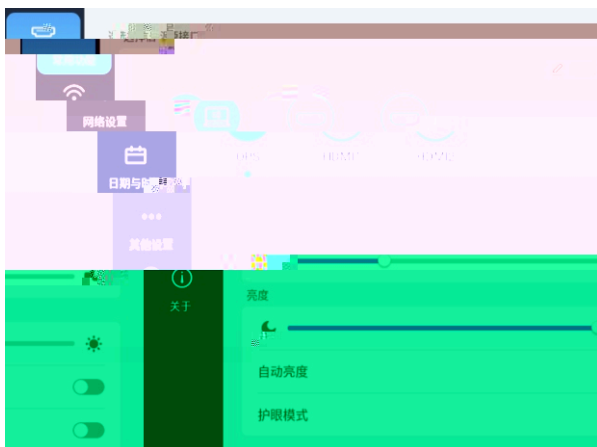

- 1.
2. OPS OPS
3. HDM 1 HDM 1
4. HDM 2 HDM 2
- 5.
- 6.
- 7.
- 8.

基本操作说明

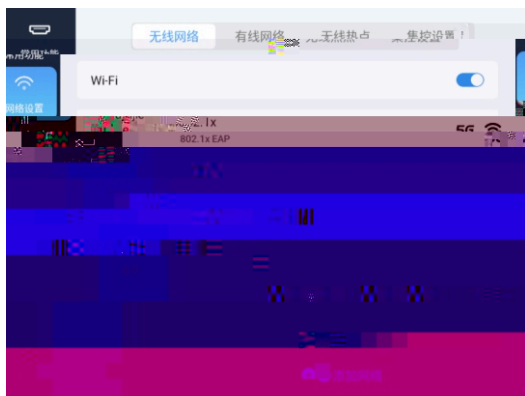

Wi-Fi
SSID

SSID

SSID

SSID





2

6. DNS1


DNS

8.

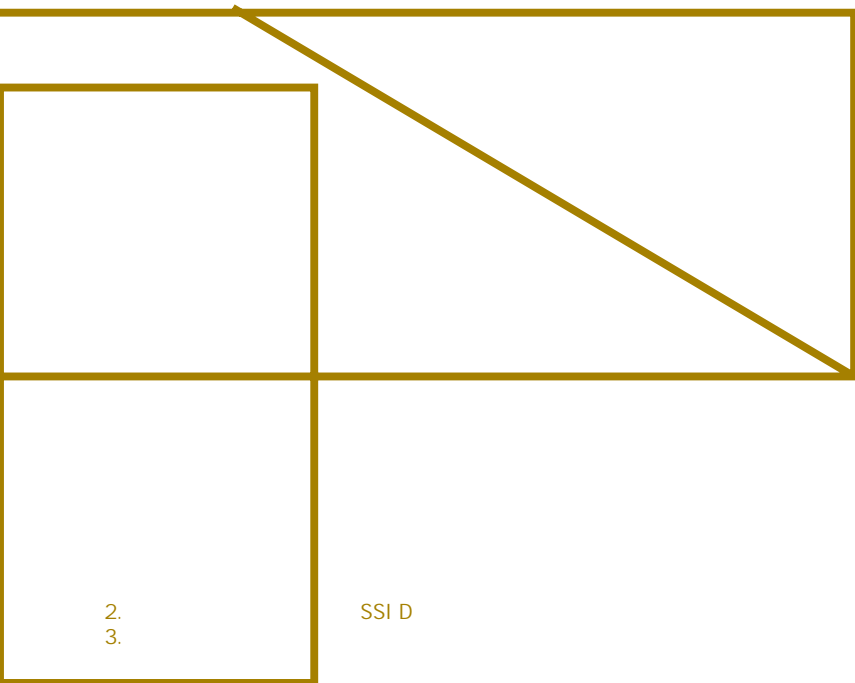


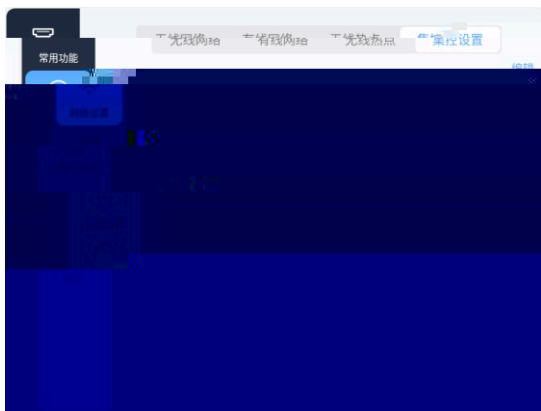


- 1.
- 2.
- 3.
- 4.

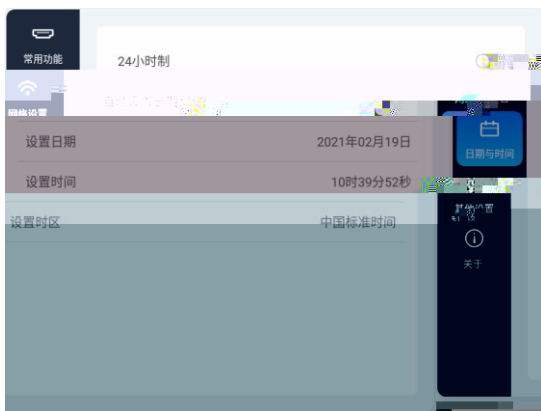

1. 24
- 2.
- 3.
- 4.
- 5.

24

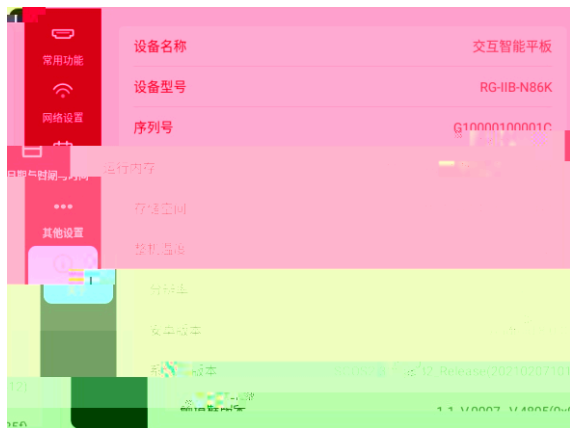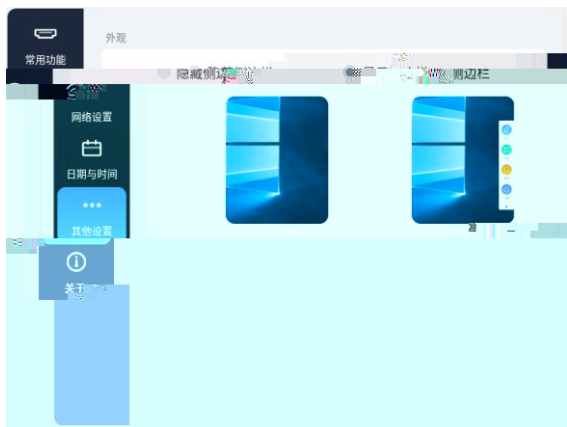


- ◆ :按照如下 (点 <1s)。 5次以上


基本操作说明


10999
192.168.1.100:10999



IP 192.168.1.100
ADB

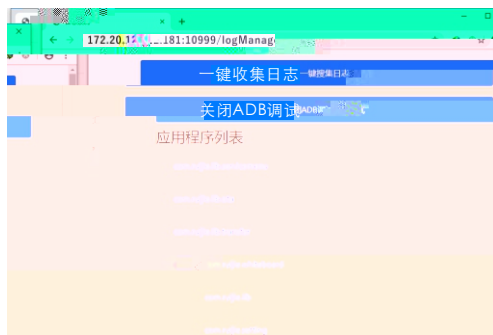


OPS

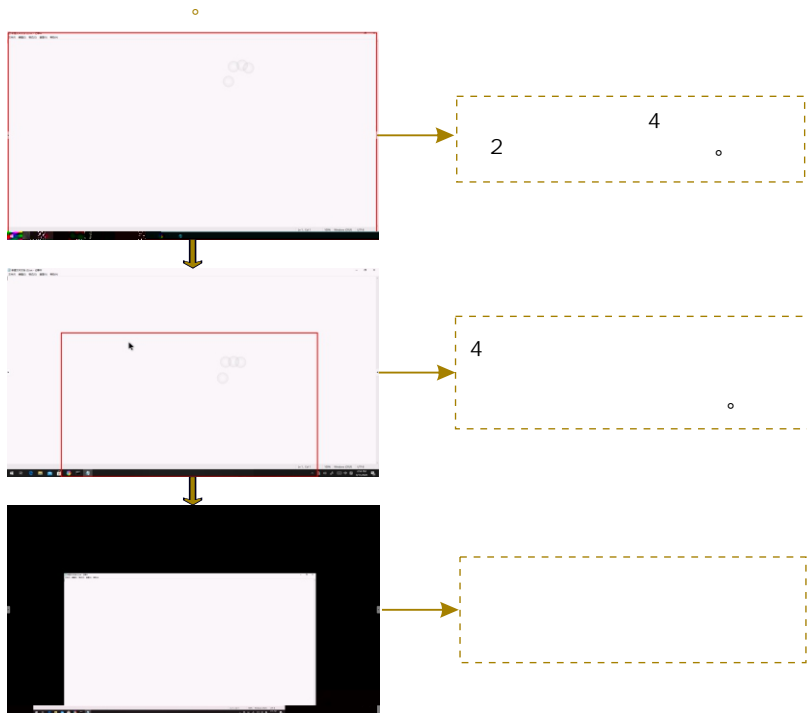



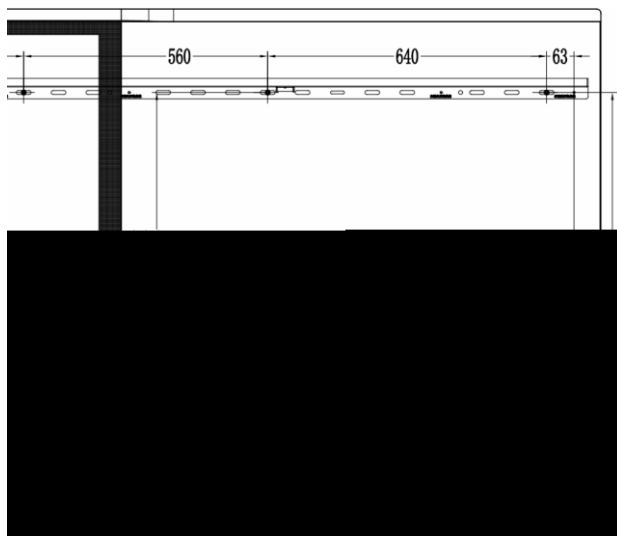





- 1.
- 2.
- 3.



- 1.
- 2.
- 3.
- 4.
- 5.

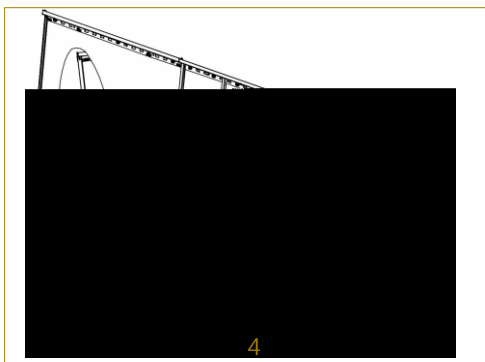


- 1.
- 2.
- 3.
- 4.
- 5.

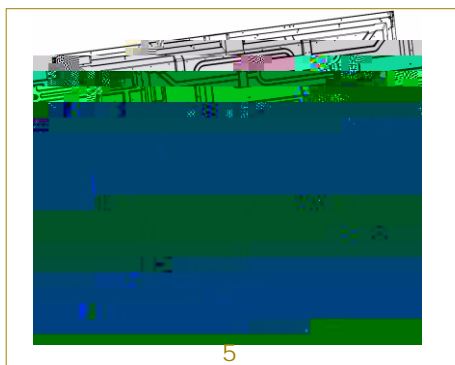

- 1.
- 2.

A/C




1.

2.

3.

4.

2 M4螺丝

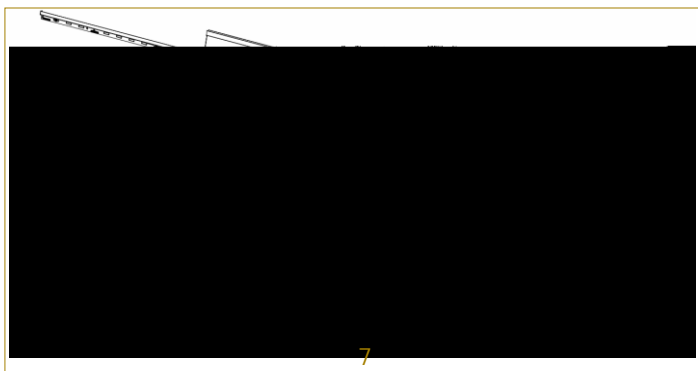

- 


8

1.

技术规格

	RG-IIB-N86KS
	AC 220V 50Hz/60Hz (AC 100-240V 50Hz/60Hz)
	440W
	≤ 0.5W
	1
(× ×)	4200mm× 1209.7mm× 110.5mm
× ×	1997mm× 1209.7mm× 110.5mm
× ×	1101.5mm× 1209.7mm× 110.5mm
	69kg
	20.6kg
	-20 -60
	10%-90% RH
	0 -40
	10%-90% RH
HDMI	2
LAN	2
AUDIO-IN	1
AUDIO-OUT	1
RS232(DB9)	1
USB 2.0	1
USB 3.0	3
USB TOUCH	1
USB Type-C	1

- 1.
- 2.

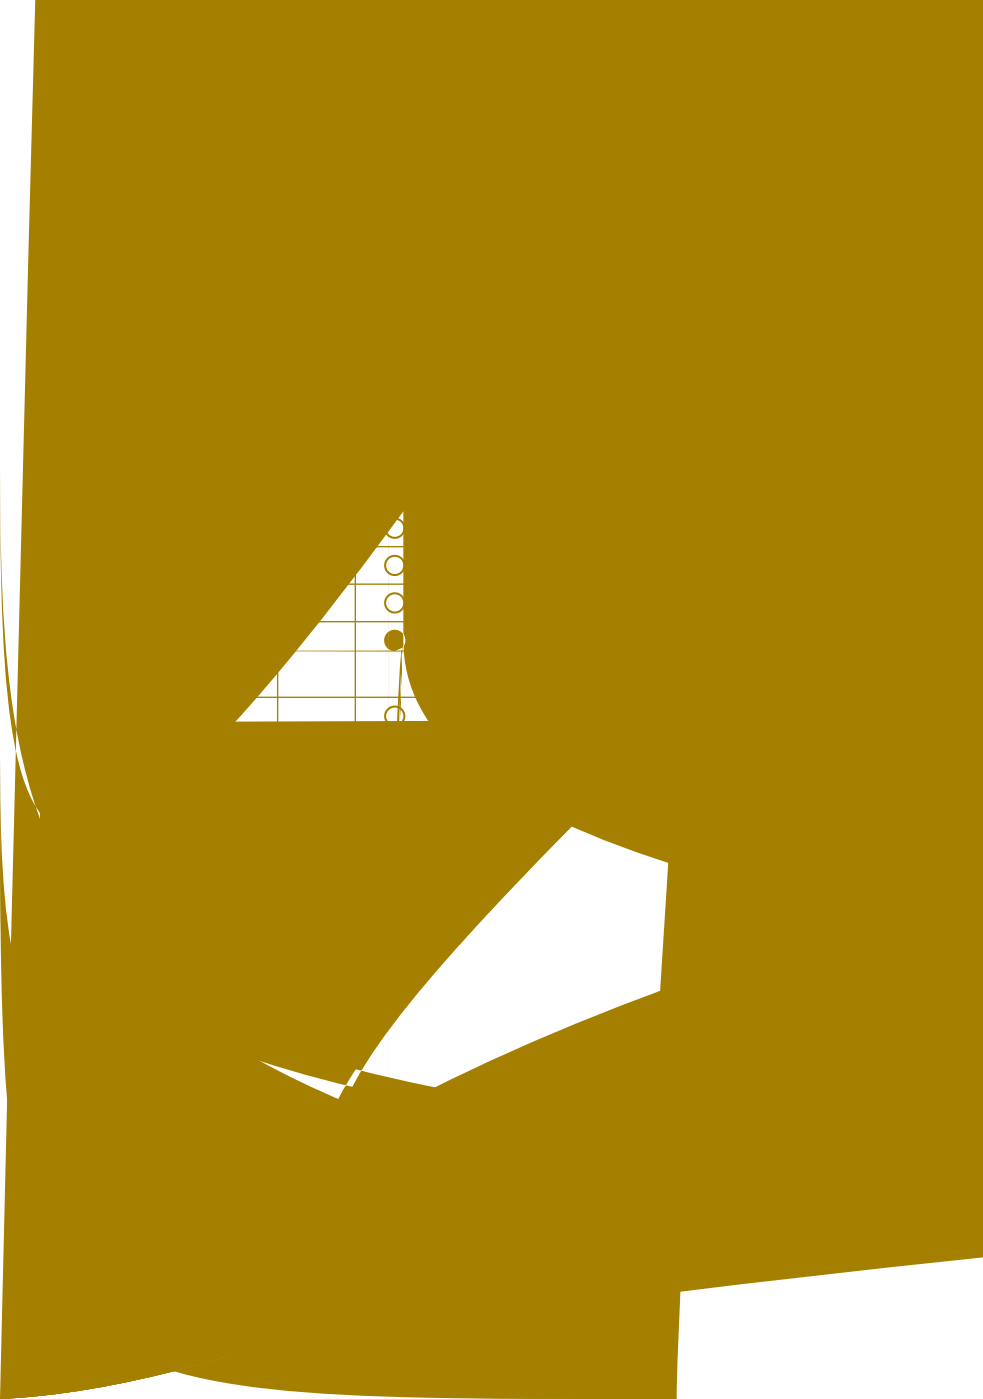



锐捷网络股份有限公司

福州市金山路

www.compuer.com.cn/service.aspx

远程技术服务中心 400-86-4006