

RG-S5750-S





## Contents

1

Ruijie# write

Building configuration...

Write to boot config file: [/config.text]



## Contents

Ctrl Version: RGOS 10.4(3b16) Release(146430)  
MTD\_DRIVER-5-MTD\_NAND\_FOUND: 1 NAND chips(chip size : 134217728) detected  
1 nand chip(s) found on the target.  
Press Ctrl+C to enter Ctrl ...

// log 3s ctrl+c CTRL

Hot Commands:

-----  
-----

Ctrl > ^C

Ctrl > ^C

Ctrl > rename config.text config.bak

Ctrl > load //

Ruijie#copy flash:config.bak flash:config.text

Ruijie#copy



## Contents

[www.ruijie.com.cn](http://www.ruijie.com.cn)

RGOS

```
Ruijie#copy tftp://192.168.33.44 15.9 0 7 0 0 81En 9.96 @s4 31m_5(6)6s4 3181En(3b86 31)_R186 316s
```




## Contents

Ruijie#show tempr

Device-1:

Current Tempr: 29.0 C

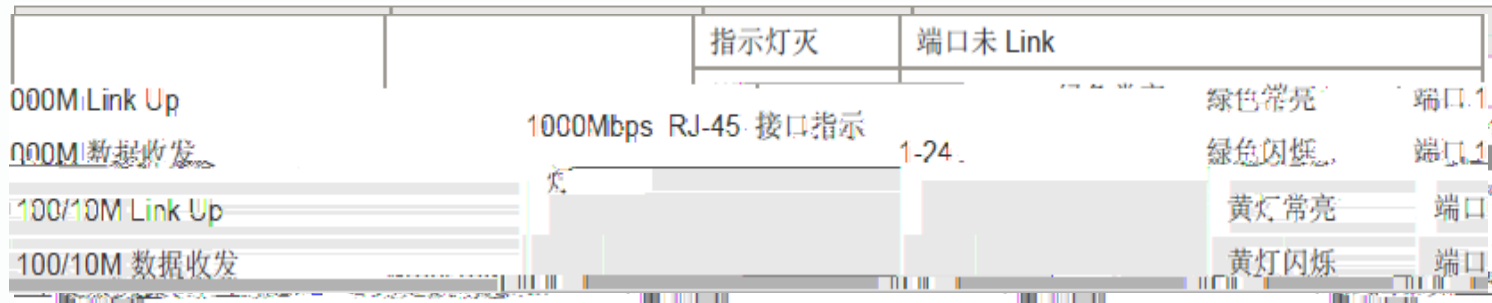

```
Ruijie#show fans
```

```
Device-1:
```

Item	Status	Serial Number	Ver	Speed
1	Normal	-	1	//normal
2	Normal	-	1	



CPU • i V i - Ü ä ½ Â K 3 ° ) T ¿ ! € \$ ñ † A ' 0 L



**Riite**

[www.riite.fi](http://www.riite.fi)

Ruijie#show interfaces counters

```
Interface : Gi gabi tEthernet 0/1
5 minutes input rate : 1034 bits/sec, 1 packets/sec
5 minutes output rate : 65 bits/sec, 0 packets/sec
InOctets      : 8918550
InUcastPkts   : 4
InMul ti castPkts : 103298
InBroadcastPkts : 0
OutOctets     : 524352
OutUcastPkts  : 4
OutMul ti castPkts : 2298
OutBroadcastPkts : 0
Undersize packets : 0
Oversize packets : 0
collisions    : 0
Fragments     : 0
Jabbers       : 0
CRC alignment errors : 0
AlignmentErrors : 0
FCSErrors     : 0
dropped packet events (due to lack of resources): 0
packets received of length (in octets):
```



**Riite**

[www.riite.fi](http://www.riite.fi)



## Contents



**Riite**

[www.riite.fi](http://www.riite.fi)



**Riite**

[www.riite.fi](http://www.riite.fi)



**Riite**

[www.riite.fi](http://www.riite.fi)



**Riite**

[www.riite.fi](http://www.riite.fi)





**Riite**

[www.riite.fi](http://www.riite.fi)



- 

\_\_\_\_\_

- 

\_\_\_\_\_

- 

\_\_\_\_\_

- 

\_\_\_\_\_

-