



RG-S2928G-S

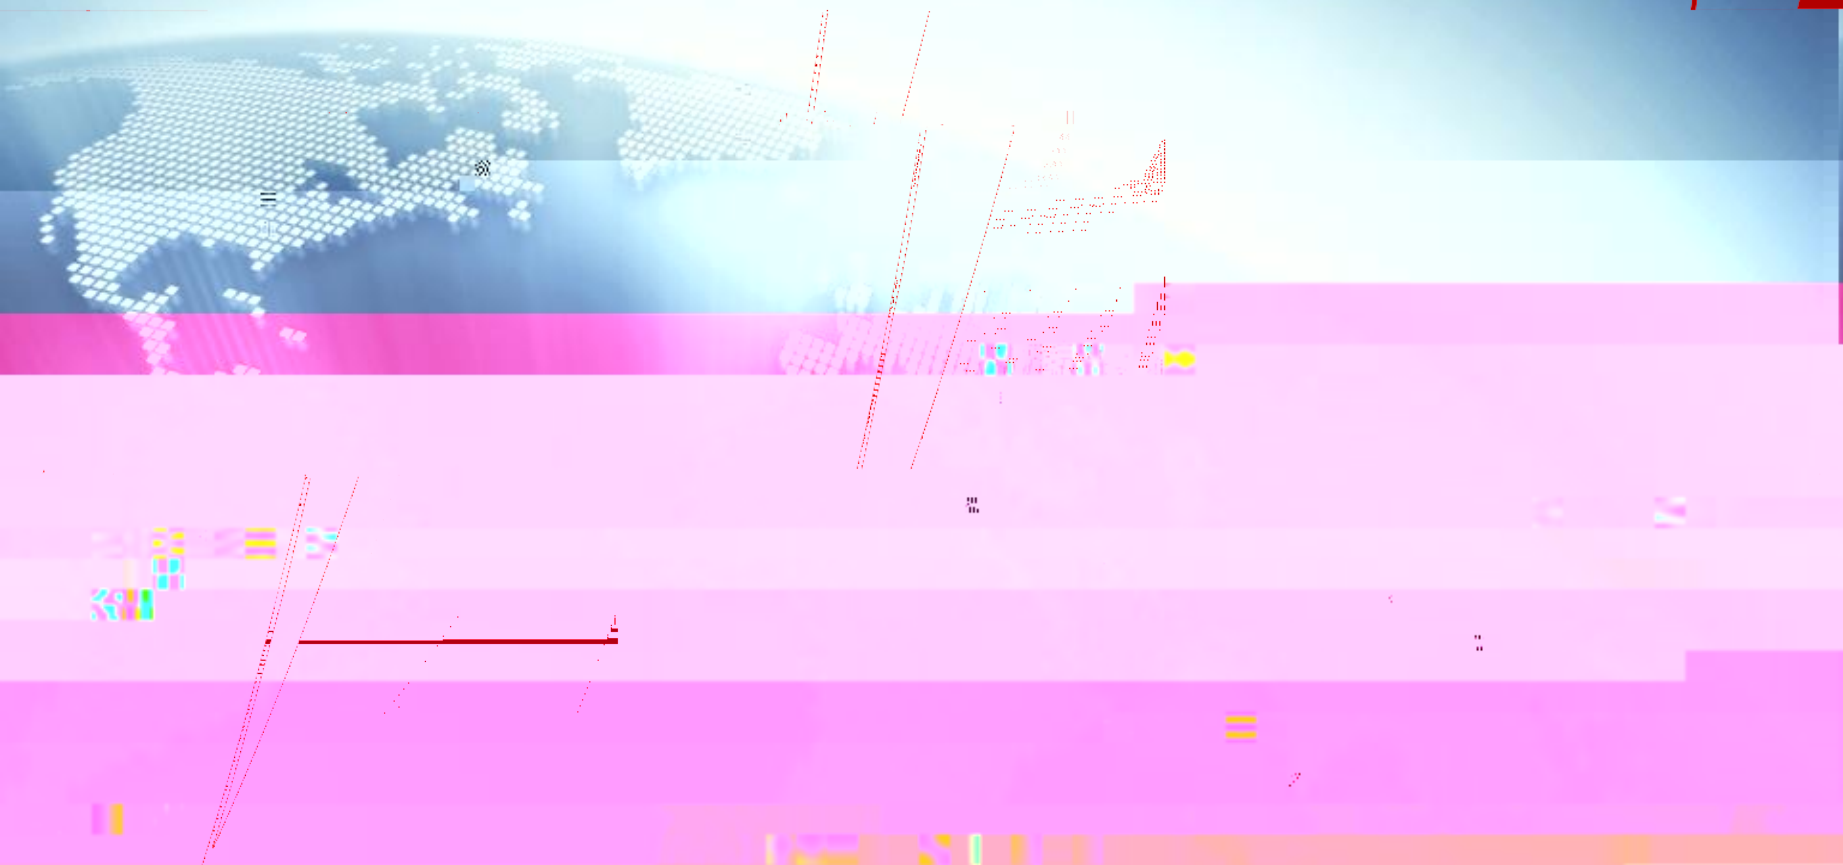

Contents

A very faint, low-contrast table of contents is visible in the center of the page. It appears to be a list of items with corresponding page numbers, but the text is illegible due to the low contrast and the overall design of the slide.

1

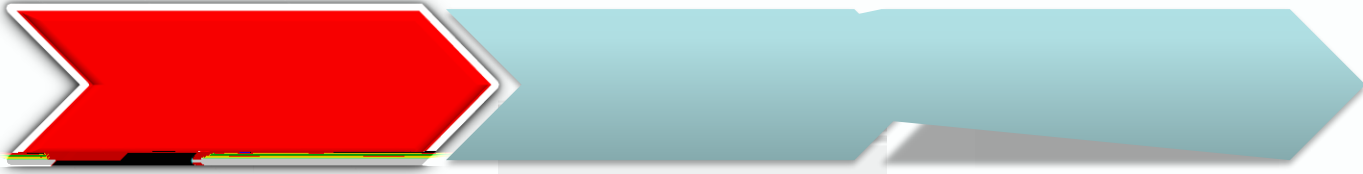

I



1





2

(

4

10cm

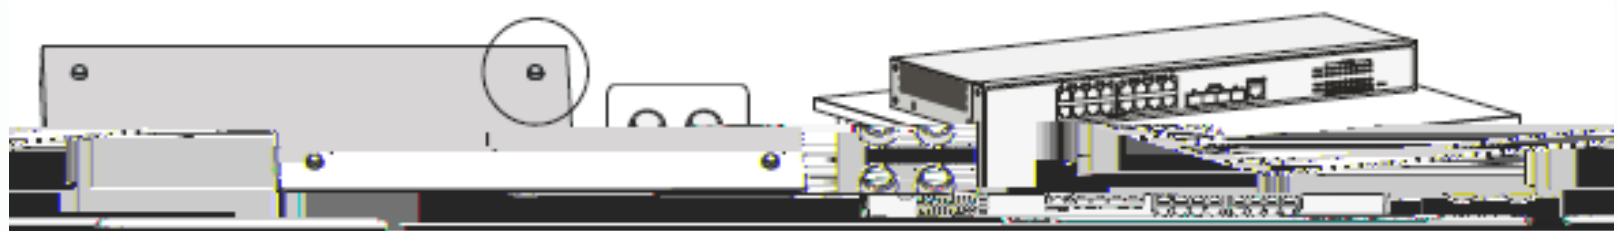

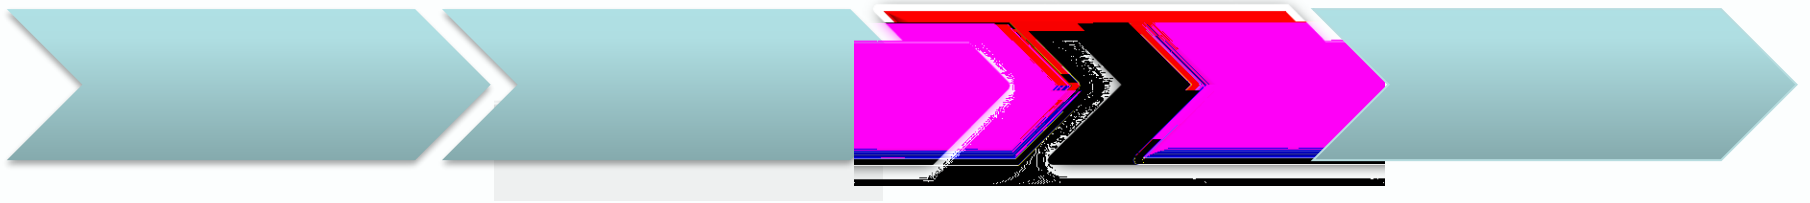

SFP


SFP

"

SFP


LC SC , ST

"

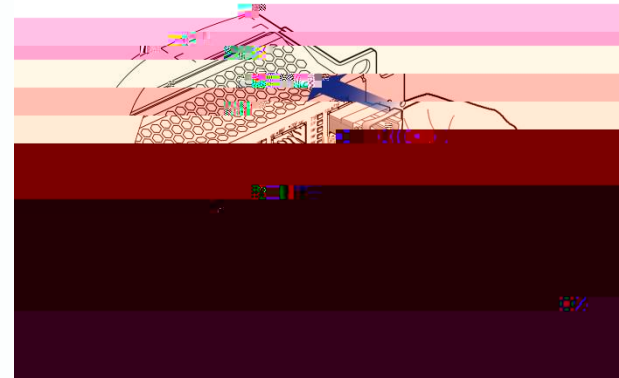


SFP

SFP

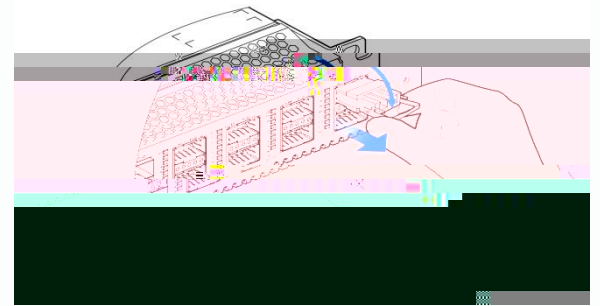


I

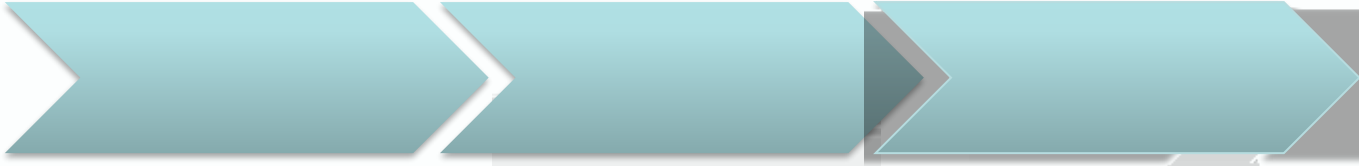




S2928G-S 100-240V~/50-60Hz 10A
(status)

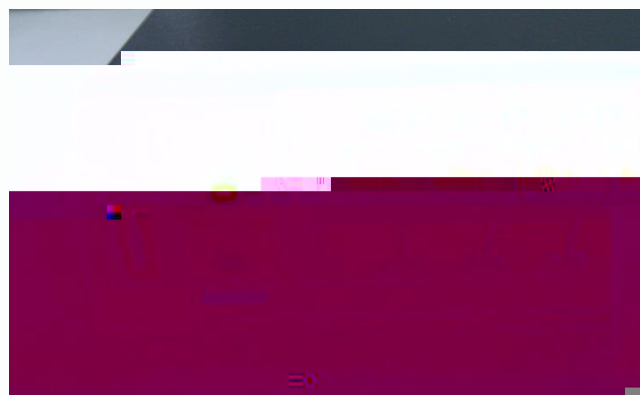


Contents

A very faint and blurry table of contents is visible in the center of the page. It appears to be a list of items with corresponding page numbers, but the text is illegible due to the low resolution and blurring. The layout seems to be a standard table of contents with a header row and several rows of entries.

I

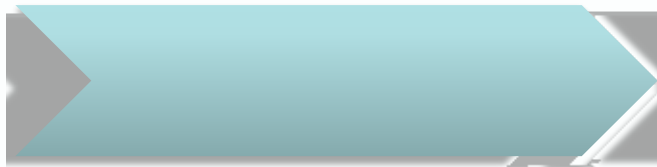

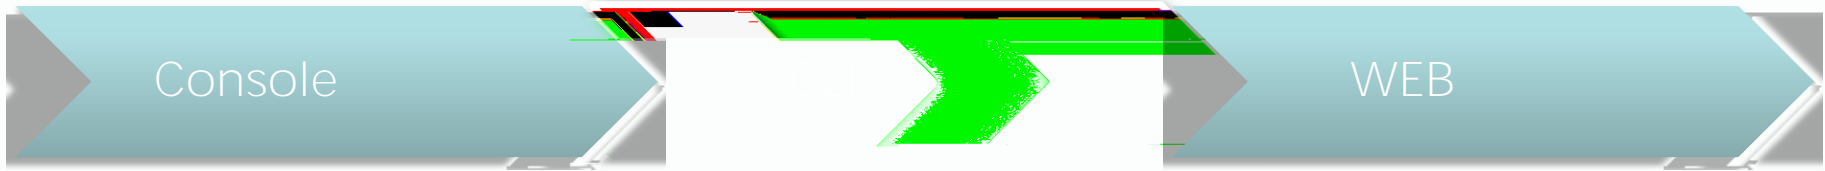

CLI

CLI

Ruijie> // :

Ruijie>enable

Ruijie# //

Ruijie#config

Enter configuration commands, one per line. End with CNTL/Z.

Ruijie(config)# //

?

Ruijie(config)#ip ?

access-list Config ACL mode

arp Arp inspection

<----->

linkto- -

```
Ruijie(config)#interface gi0/26
Ruijie(config-if-GigabitEthernet 0/26)#description linkto-core-s5750-Gi0/8
// - -s5750 -Gi0/8
```

(CC)

(DD)

(AA) (BB)
AA-BB-CC-DD

```
Ruijie(config)#hostname YOUXI-jieru
```


Console

CLI

WEB

Web

S2928G-S

web

pc

S2928G-S

PC

ip

192.168.1.100/24

ping

IP 192.168.1.200

```
C:\>ping 192.168.1.200
Ping 192.168.33.180      32      :
192.168.33.180          :    =32    =1ms TTL=64
192.168.33.180          :    =32    <1ms TTL=64
```

IE

<http://192.168.1.200>

admin/admin

Console

CLI

WEB

Web

交换机 WEB 管理平台

- 交换机IP设置
- VLAN管理
- 路由设置
- 端口镜像
- 端口限速
- 聚合端口
- 端口设置
- DHCP中继
- IGMP Snooping

设备型号: S2928G-S

主机名: ruijie

软件版本: RGOS 10.4 (2b11)p1 Release (134566), Web Version: 10.4.134566

硬件版本: 1.01

序列号: R0610836400828

MAC地址: 8611-9c-40c7

返回首页
系统管理

1

2

3

www.ruijie.com.cn

www.ruijie.com.cn/service.aspx

support.ruijie.com.cn

webchat.ruijie.com.cn

4008-111-000