



111

11

I AP AM5528



RG-AM5528

10cm

3

I AP AM5528



RG-AM5528

10

RG-AM5528

I AP AM5514



RG-AM5514

10cm

| AP AM5514



RG-AM5514

♪ RG-AM5514



Ó



AP AM5514



fi

10



I

AP



天


MAP552

♪



♪

♪

fi

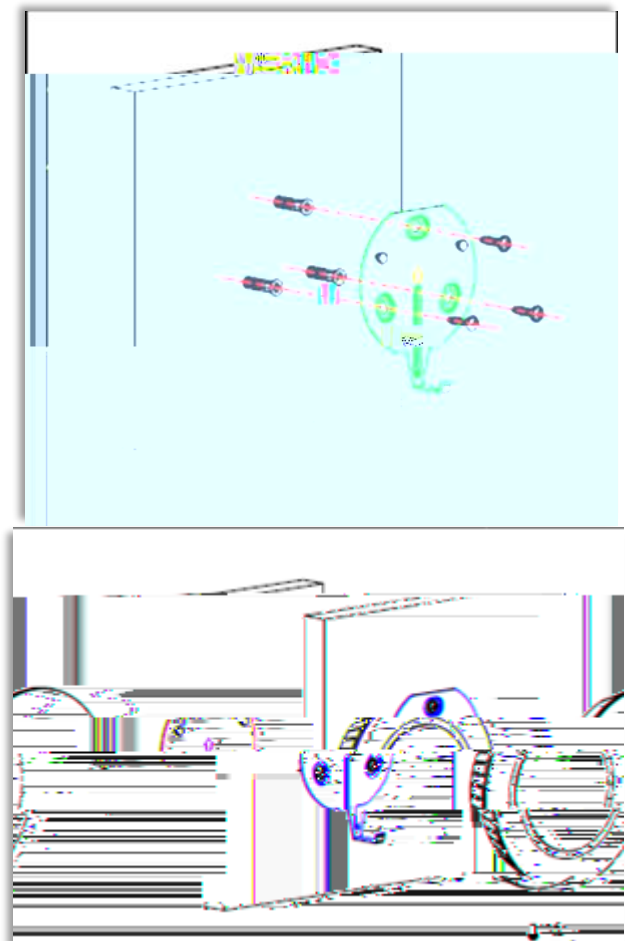

MAP552-W

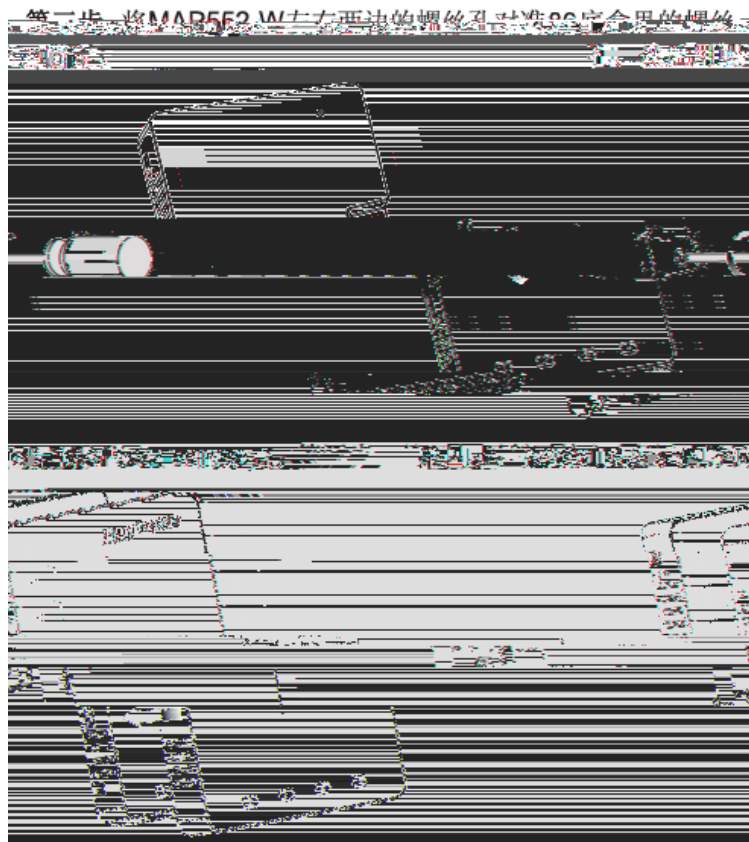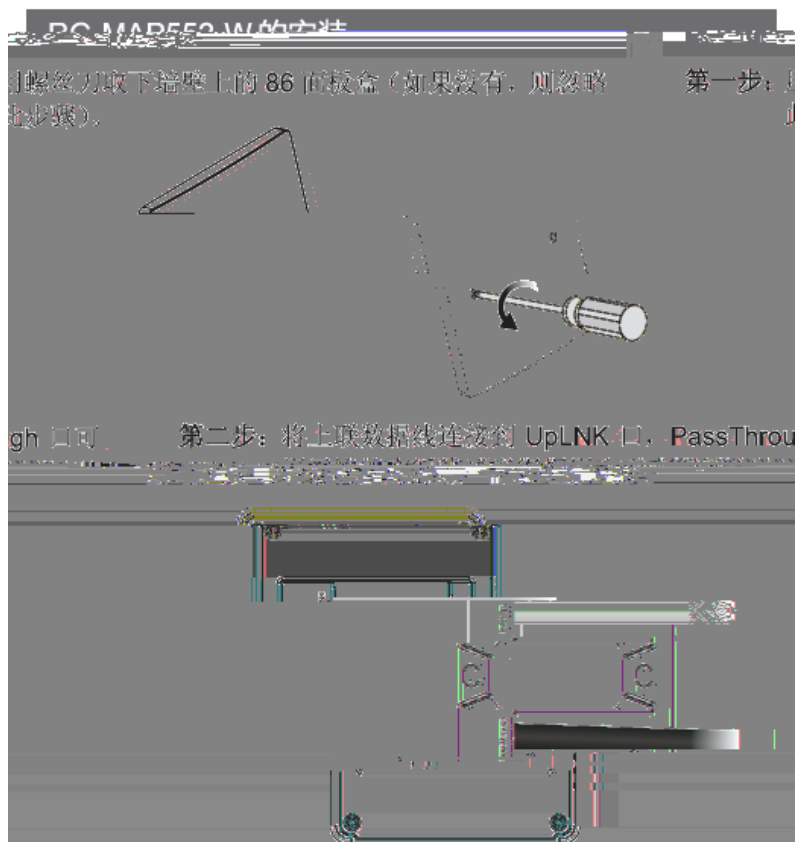

I AP



♪ AP


♪		2.5Hz	AP	
♪		0.25Hz	2s 2s	AP
♪	MS			
	4		3.8s	0.2s
AP		MS		
fi		(2.5Hz):		LED ON





111

11

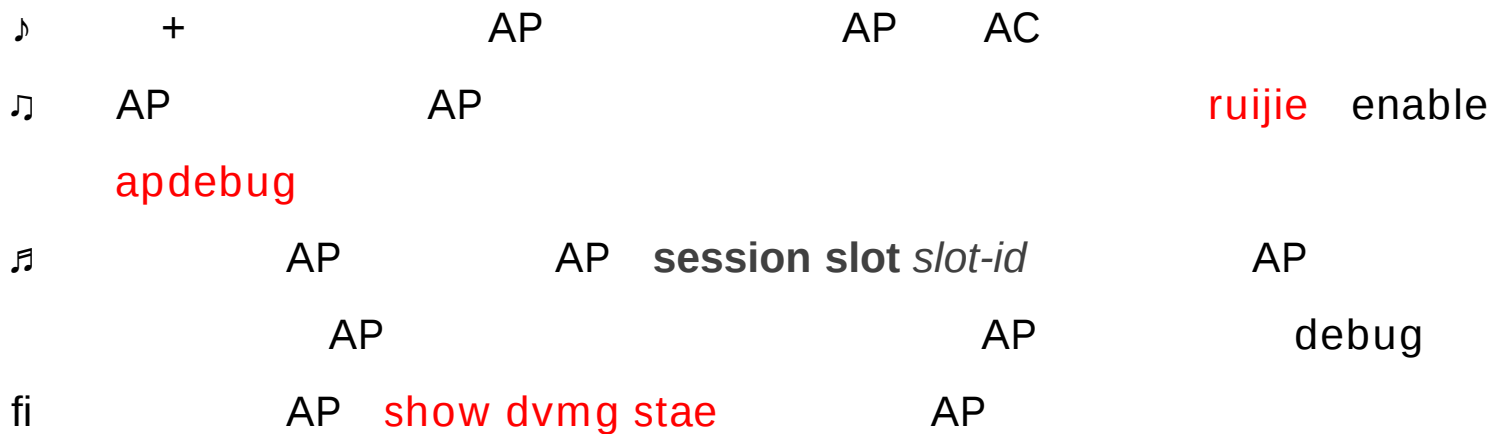

```
Ruijie#show dvmg state
```

index	slot id	turn	firm-state	run-state	online-time	event-number	if-up-down
0	0	0	normal	running	0m0s0ms	0	0

+ AP AP AP AP
 FLASH 11.1 B9P2 AP AC AP
 AP AM5514&AM5528 AP(MAP552-W
 MAP552\MAP552-S) AC AP AP
 Ruijie(config)# ac-controller
 Ruijie(config-ac)# active-bin-file am5528.bin
 Ruijie(config-ac)# active-bin-file map552s.bin
 Ruijie(config-ac)# ap-image auto-upgrade

```

Ruijie#show tftp-server updating-list
IP Address      Source Interface      File Name         Type      File Size
-----

```

AC AP show
yhuvlrq < vorw + AP

[illegible]

www.huawei.com.cn

www.huawei.com.cn/service.aspx

support.huawei.com.cn

webchat.huawei.com.cn

4008-111-000