



copyright © 2022



- 
- 
-

# 1 Web

## 1.1 ~~IPGÄ~~

Web

Web

chrome

WEB




IF2920U

## 1.2

<u>WEB</u>	WEB
------------	-----



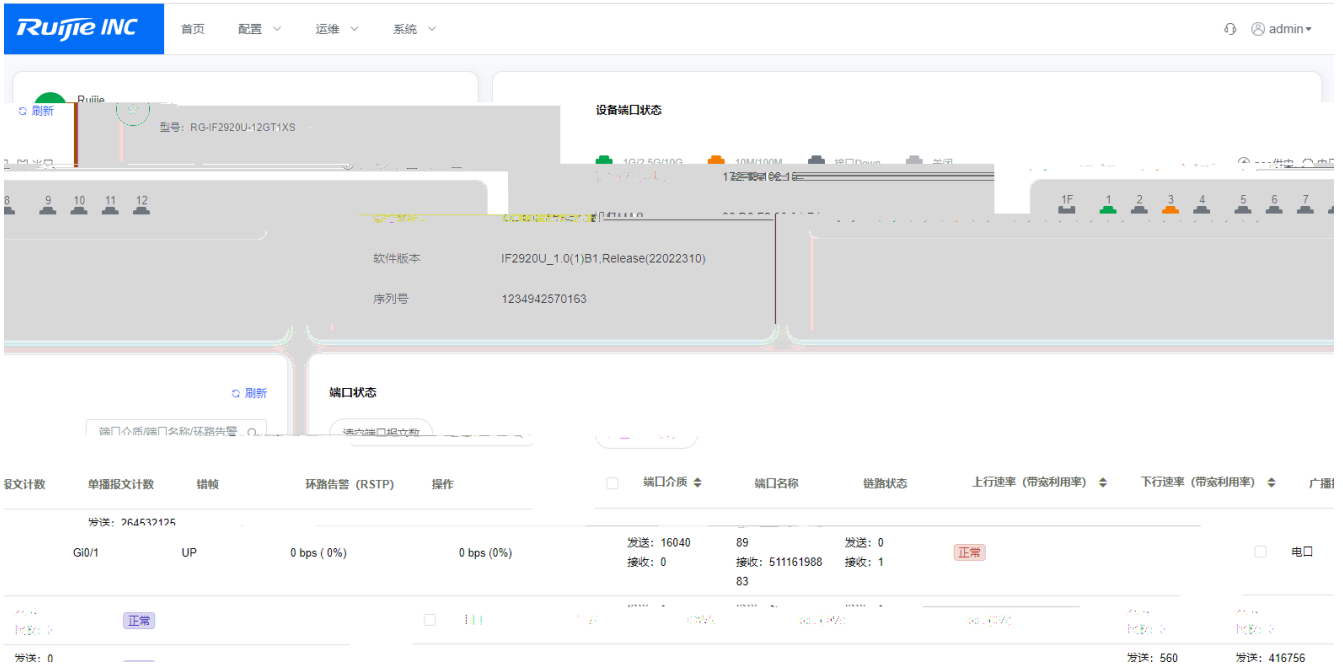

### 1.3.2.1

Web



### 1.3.2.2

Web

### 1.3.3

#### 1.3.3.1


/

/

MAC

poE

/

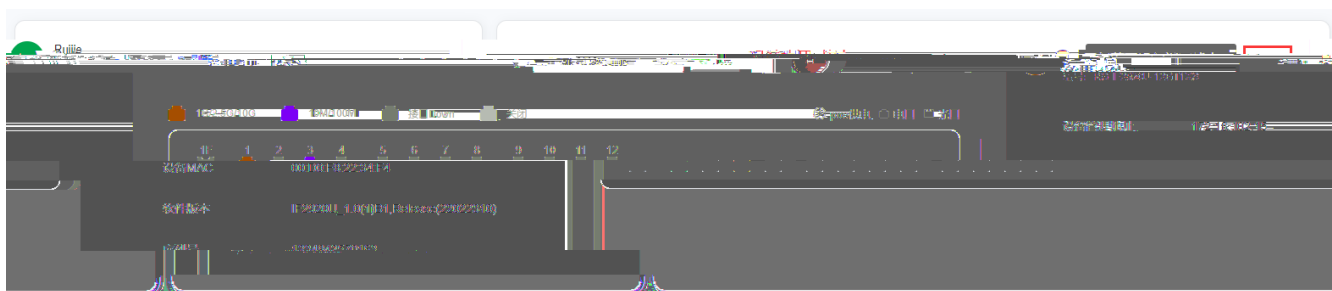

●

< >

### 1.3.3.2



●

< >

0

●

< >

●

/ /

●

DDM

<DDM >

DDM

### 1.3.3.3 POE /ARP

The screenshot displays a network management interface with two tables. The top table shows POE statistics: 总功率: 126 W and 剩余功率: 126 W. Below it is a table with columns: MAC地址, 端口, 端口, POE开关设置, 供电状态, 供电功率, and IP地址. The first row contains: 00d0.f822.33b9, Gi0/2, Gi0/1, 开启, 关闭, 0, and 172.29.15.1. The bottom table shows ARP entries with a total of 1 entry (共 1 条).

- POE

POE < > POE

- ARP


ARP < > ARP


## 1.3.4

### 1.3.4.1


#### 1.3.4.1.1

##### 1.3.4.1.1.1

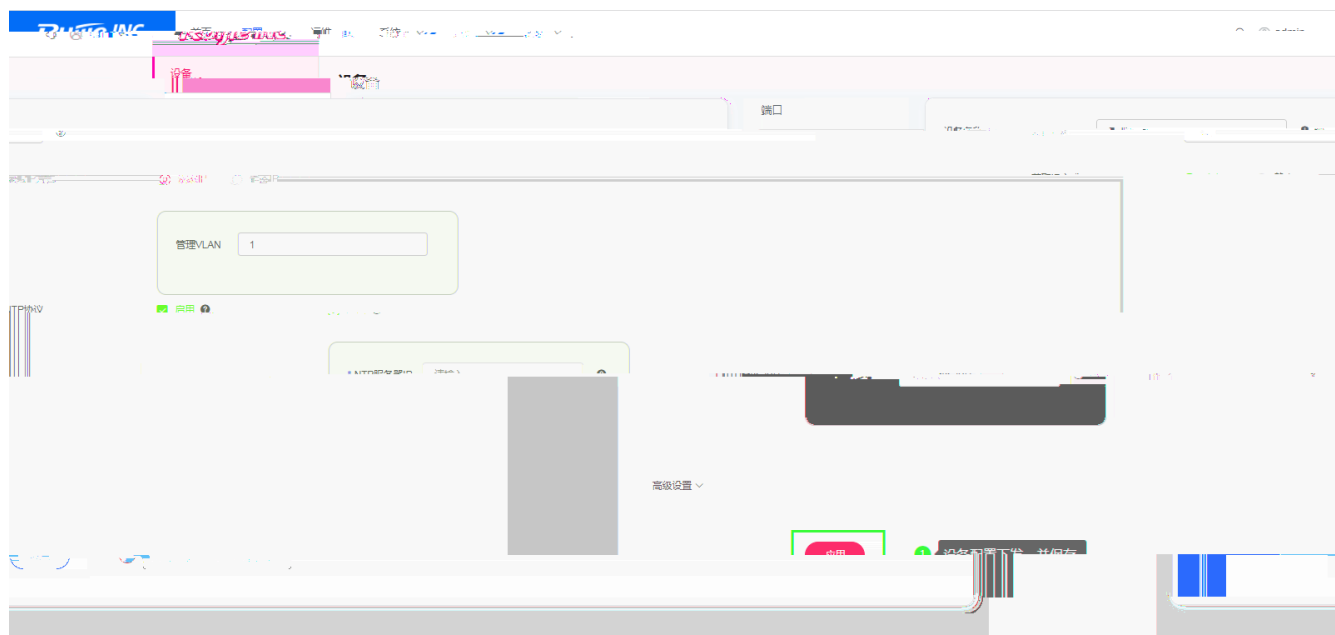

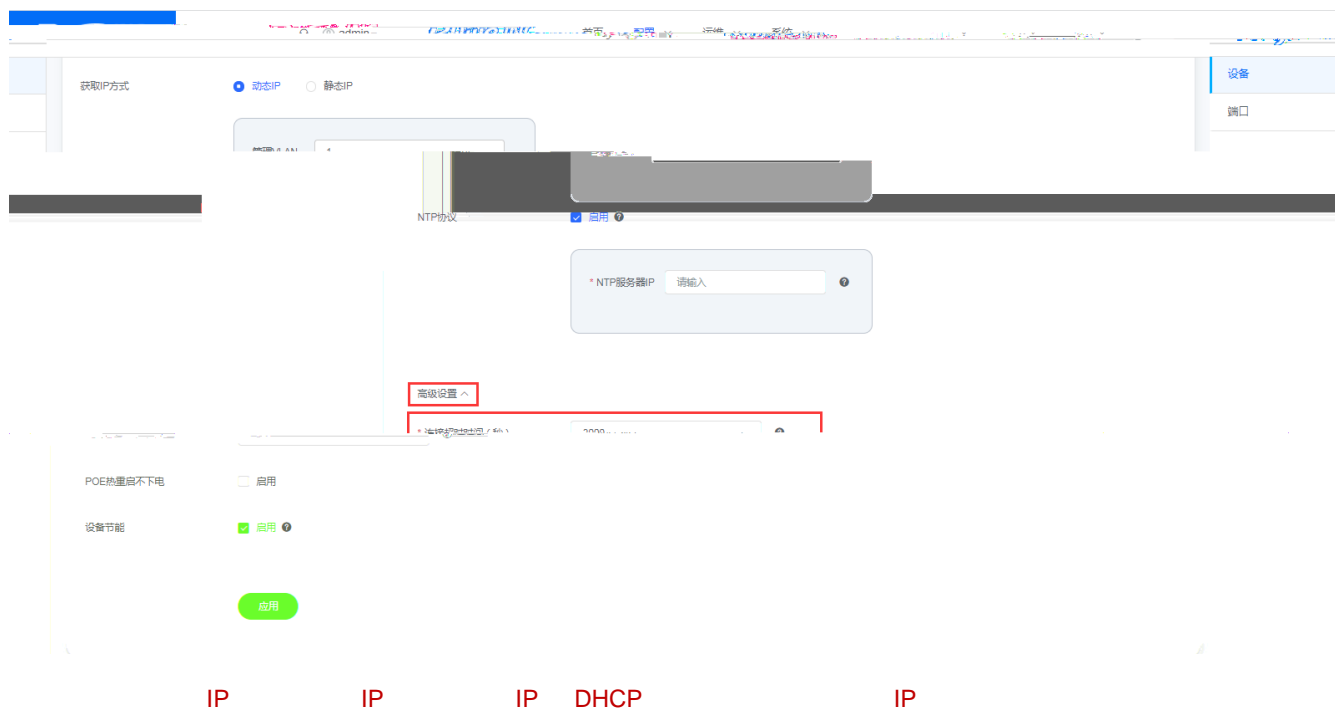


### 1.3.4.2



•





## 1.3.5

### 1.3.5.1


#### 1.3.5.1.1 Ping

Ping IP < >


检测后的内容

```
Sending 5 ICMP Echoes to 172.29.15.1, timeout is 2000 milliseconds:  
ping: recv 172.29.15.1 0 ms  
ping: recv 172.29.15.1 2 ms  
ping: recv 172.29.15.1 2 ms  
ping: recv 172.29.15.1 0 ms  
ping: recv 172.29.15.1 0 ms  
ping: recv 172.29.15.1 0 ms  
Success rate is 100 percent (5/5),round-trip min/avg/max = 0/0/2 ms
```


#### 1.3.5.1.2

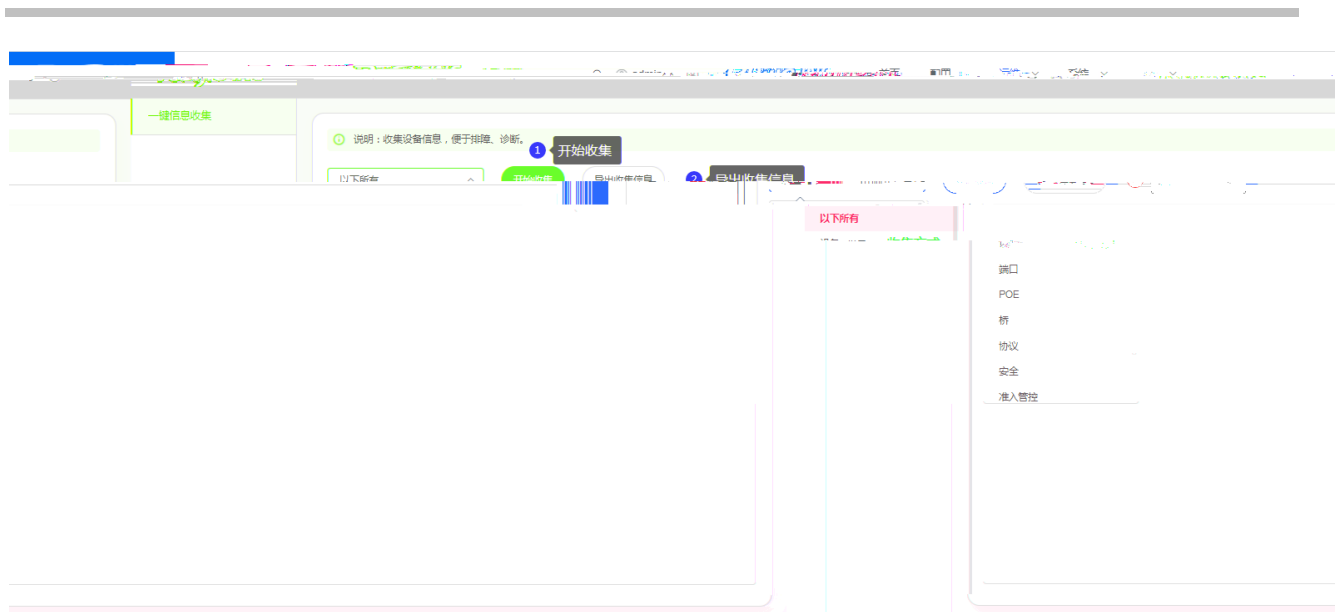

\_20220118182247.txt

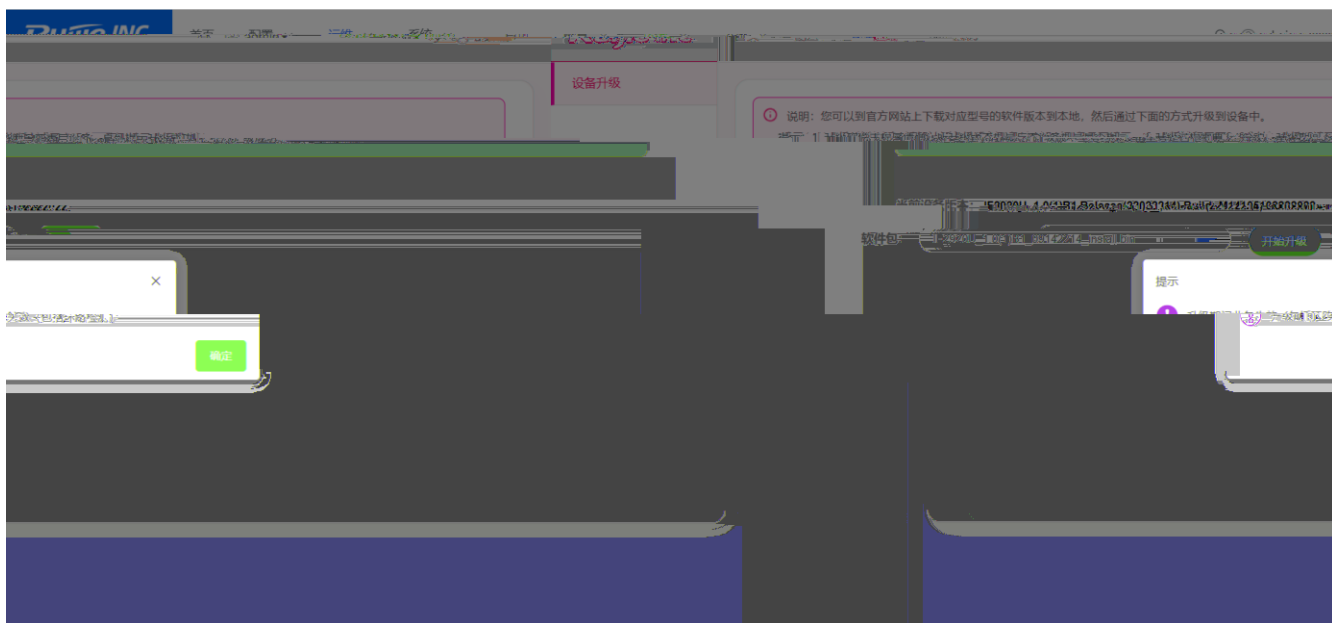

### 1.3.5.2.3 Boot

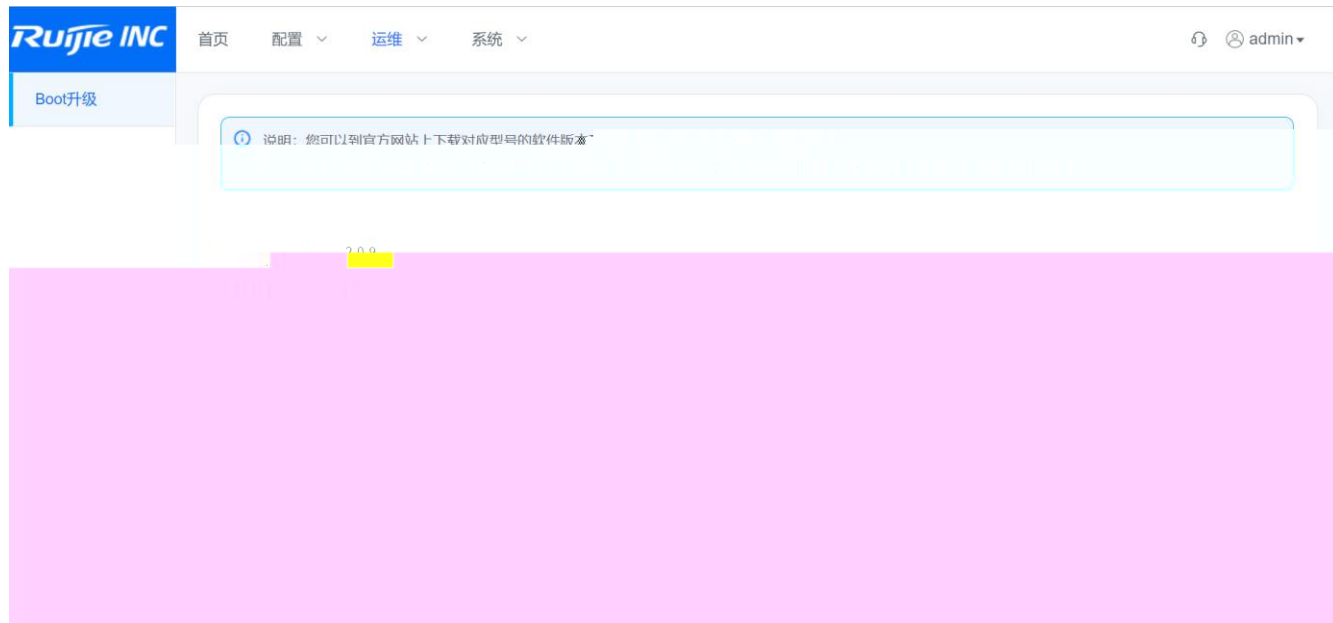

boot

### 1.3.5.3


#### 1.3.5.3.1

##### 1.3.5.3.1.1



●

< > config.json

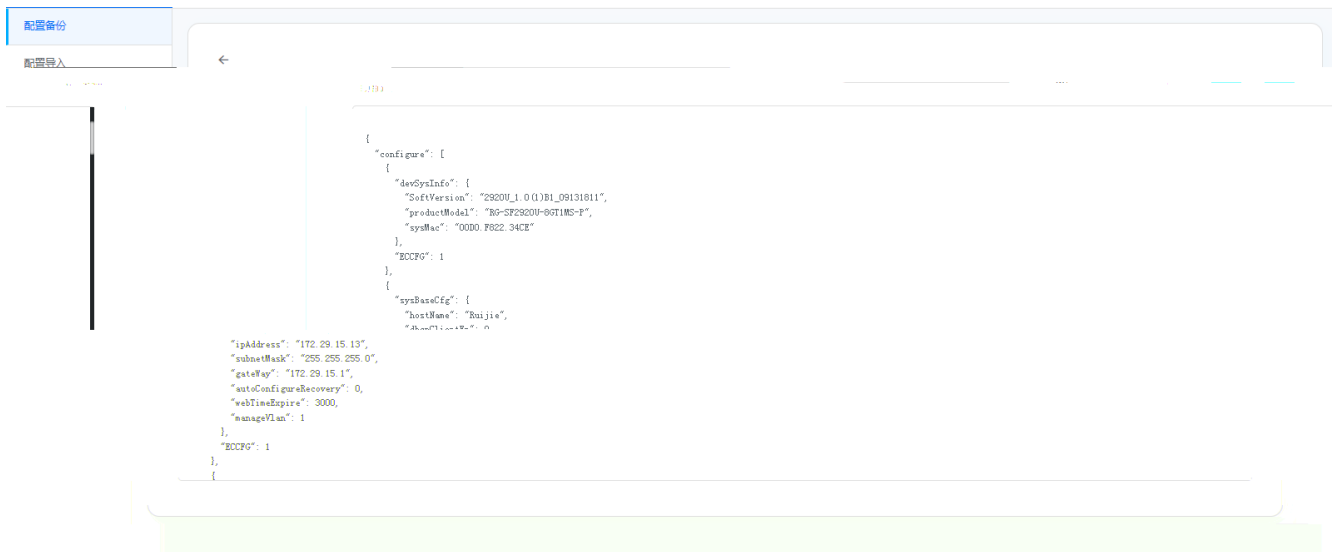

### 1.3.5.3.1.2




- < > < >
- < >

### 1.3.5.3.2

2-3



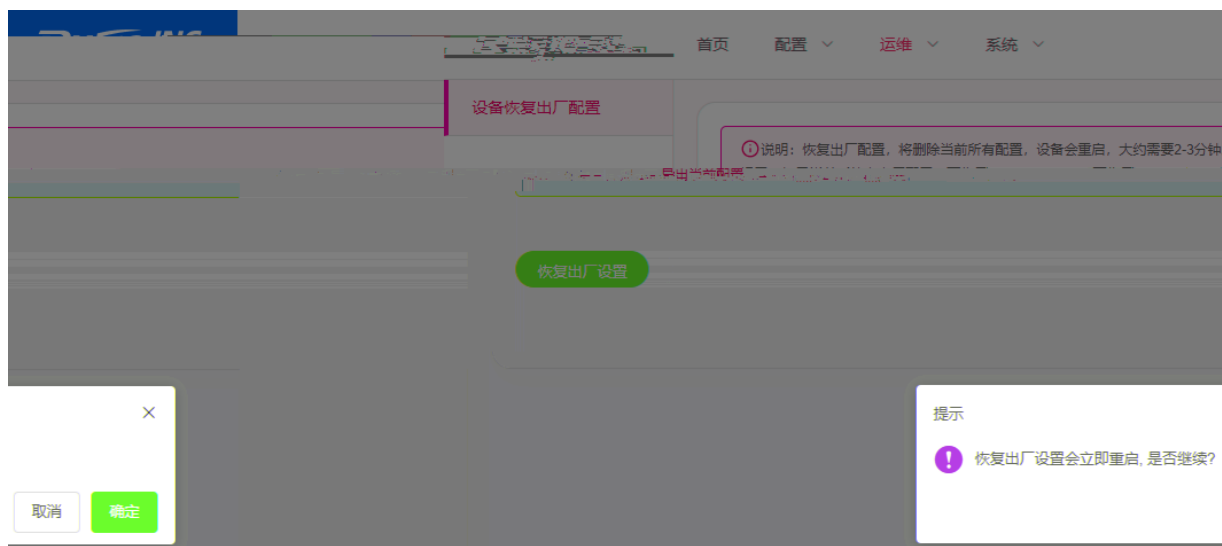

- 

< >

- 

< > config.json

### 1.3.6

#### 1.3.6.1

##### 1.3.6.1.1







```
Ruijie(diag)ping 192.168.193.1
Sending 5, ICMP Echoes to 192.168.193.1, timeout is 2000 milliseconds:
ping: rcv 192.168.193.1 1 ms
ping: rcv 192.168.193.1 0 ms
ping: rcv 192.168.193.1 1 ms
ping: rcv 192.168.193.1 0 ms
ping: rcv 192.168.193.1 0 ms
Success rate is 100 percent (5/5),round-trip min/avg/max = 0/0/1 ms
Ruijie(diag)#
```