

RG-S6010

V1.1

2022-0 -

copyright © 2022 ǎ ǎ ǎ

- $\lambda \wedge \gamma$
- λ
- $\lambda \wedge \gamma \wedge \tau$

- ᠠᠵᠤᠨ ᠠᠵᠤᠨ 1 <http://www.ruijie.com.cn>
- ᠠᠵᠤᠨ ᠠᠵᠤᠨ 1᠐ ᠰᠤᠨ ᠰᠤᠨ <http://www.ruijie.com.cn/fw/>
- ᠠᠵᠤᠨ 7*24h ᠰᠤᠨ ᠰᠤᠨ <http://ocs.ruijie.com.cn>
- ᠠᠵᠤᠨ 7*24h ᠰᠤᠨ ᠰᠤᠨ 4008-111-000
- ᠠᠵᠤᠨ ᠰᠤᠨ ——— ᠰᠤᠨ <http://www.ruijie.com.cn/special/fw/tool/xryf/>
- ᠠᠵᠤᠨ ᠰᠤᠨ ᠰᠤᠨ 4008111000@ruijie.com.cn
- ᠠᠵᠤᠨ ᠠᠵᠤᠨ ᠰᠤᠨ doc@ruijie.com.cn



'OAPP



à 'O

1.

$$\tau \quad \gamma \quad \cdot \quad \% \quad \uparrow \quad \sim \quad "H \quad \gamma \quad = \quad \vdash \quad \boxed{\text{OBJ}} \quad A \quad \% \quad \boxed{\text{OBJ}}$$




/

2.

~ [06] 0 1 7 4 0 7 [06]

v

1

RG-S6010

 $\bar{U}$

4

IPv6

영양

0

T

RG-S6010

1


2	10G SFP+	1000B
	0	

	GB 4943.1				
	0 to 50°C				
	-40 to 70°C				
	10%	90% RH			
	8.3KG		2		
	450 * 440 * 44	L * W * H	mm	1RU	


RG-S6010-48GT4XS

- 2 1+1
- 1 1 3 2+1

1-1 RG-S6010-48GT4XS

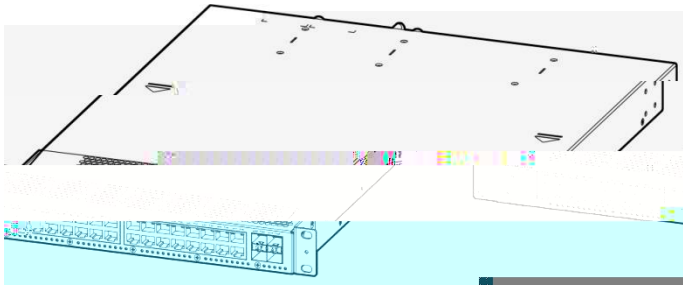

1-2 RG-S6010-48GT4XS

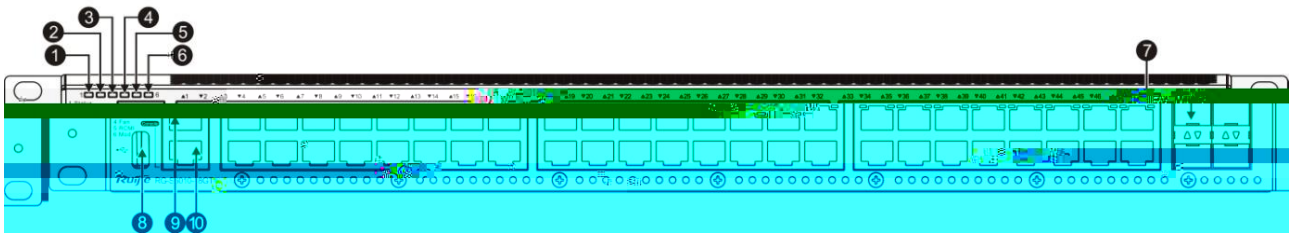

	10G SFP+	o
PWR1	USB2.0	o
PWR2	10/100/1000Base-T RCMI	o
	Console	
RCMI	o	
√		

RG-S6010-48GT4XS	10G SFP+	1G SFP	10G SFP+	1G SFP
------------------	----------	--------	----------	--------

[illegible]

RG-S6010-48GT4XS

A line drawing of a hand pressing a metal plate against a wall. The plate has a circular hole and several rectangular slots. A blue arrow points downwards from the bottom of the plate, indicating the direction of force or movement.

RG-S6010-48GT4XS

■ USB

○ Universal Serial BUS

○ USB


USB
USB
USB
USB




USB

FAT32

U

■ Console ↙ ° RS-232 ° RJ45 ° ∞
° ↘

■ 10/100/1000M RCMi ° ↙ ° RJ45 ° ∞ °



Œ 'O

ı

2

2



1 1




1

—

3

1-6 M6010-FAN-F

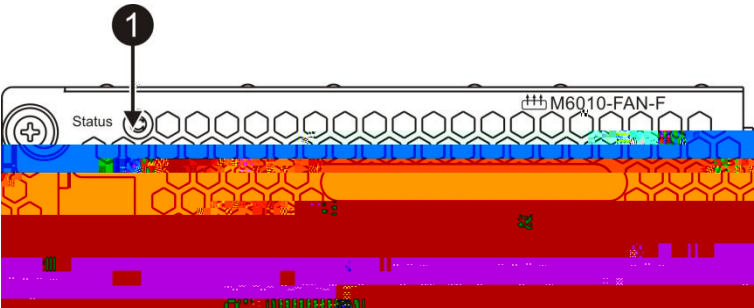

Status

	Status		


	M6010-FAN-F
	90CFM
	25000RPM
w	40W
	0.56KG
	256.8* 140.5 * 41. L * W * H mm

1.2.2 RG-M6010-AC150-F


RG-M6010-AC150-F RG-S6010
1

RG-M6010-AC150-F ~ ů ,

1-7 M6010-AC150-F

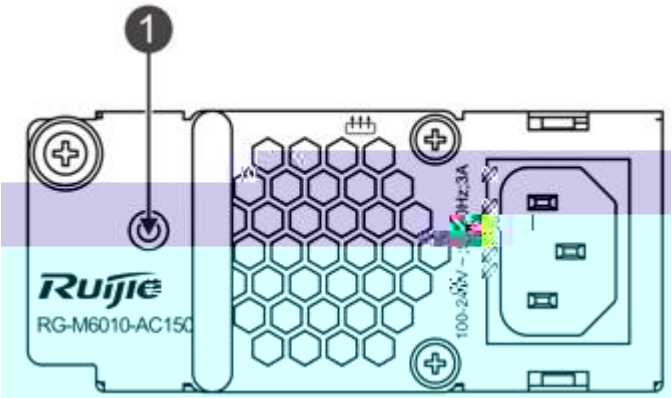

Status

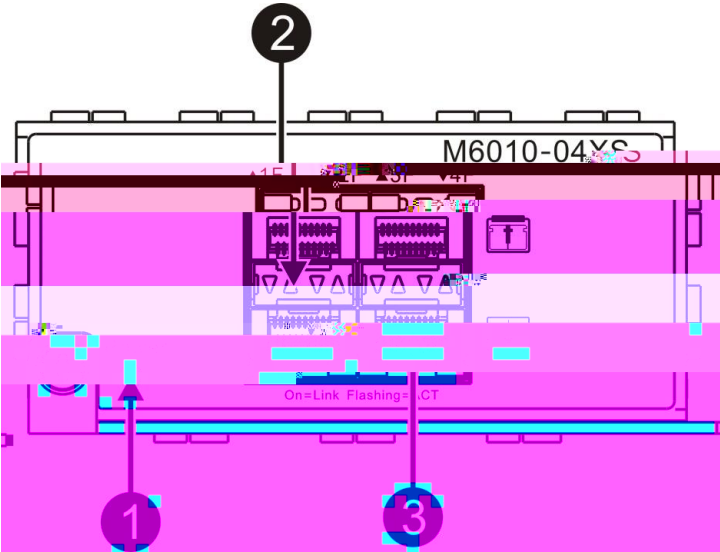

Power
1F~4F o
SFP+ o

M6010-04XS 4 SFP+ o ĩ DAC 1000Base-X SFP+/SFP

POWER	Power		

	GB 4943.1
	0 to 50°C
	-40 to 70°C
	10% 90% RH
	0.45KG
	226.5 * 87 * 41.1 L * W * H mm

 M6010-04XS	10G SFP+	1G SFP	10G SFP+	1G SFP				
 M6010-04XS	10G	DAC	Direct Attach Copper	SFP+	1	3	5	

2.1.3

2.1.6

* y † Ω OBJ □ / ► ∂	
!	
18	24

2.2

RG-S6010

2.2.1

RG-S6010 TH	
■	
■	RG-S6010 ĩ
■	TH RG-S6010 u
■	

2.2.2

RG-S6010	o	20cm	
↳		o	3

2.2.3

RG-S6010 TH	
■	ü ĩ
■	√
■	

RG-S6010

	1.5M	0.4M
---	------	------

2.2.4

d Y

2.5

'	√	√
'	√	√

3

-
-
-

3.3

RG-S6010

20mm


-
-
-
-



1) 8 L 8 M4*8FMO

2) 4 M4*8FMO

3-1



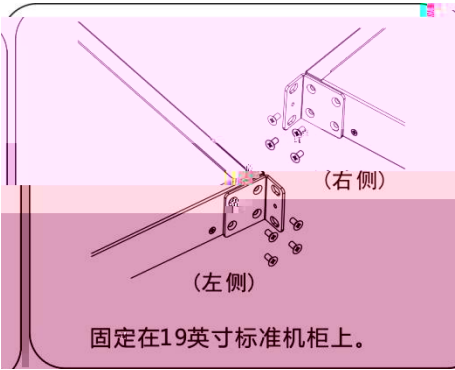


RG-S6010

EIA

19

w , ?

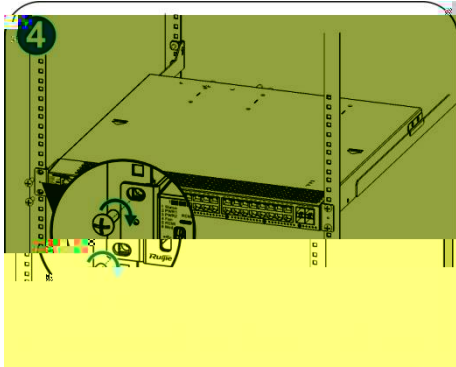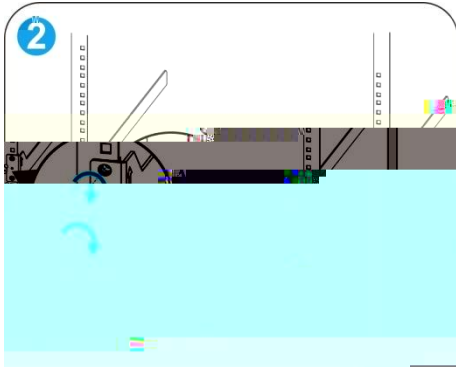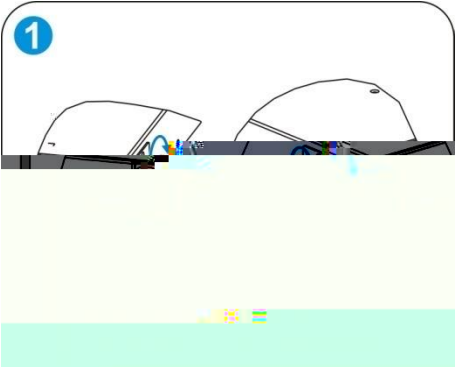

800mm ± 1200mm

3.6

RG-M6010-AC150-F

- 1) ‘ ů
- 2) √ √ L

M6010

- 1) Ů RG-S6010

- 2) Ů

↑

V

↑

~ —

- 3)

3-8



a M6010

a

a

3.8

RG-S6010

	RJ-45	Console	DB9
a	9600	8	1

3.10

-
-

- 1) RJ45 RCMI
- 2) ,
- 3) RJ45

3.11

-
-
-

- 1)
- 2)
- 3)

3.12

-
-

■


■

4

4.1

PC Console 4-1

4-1

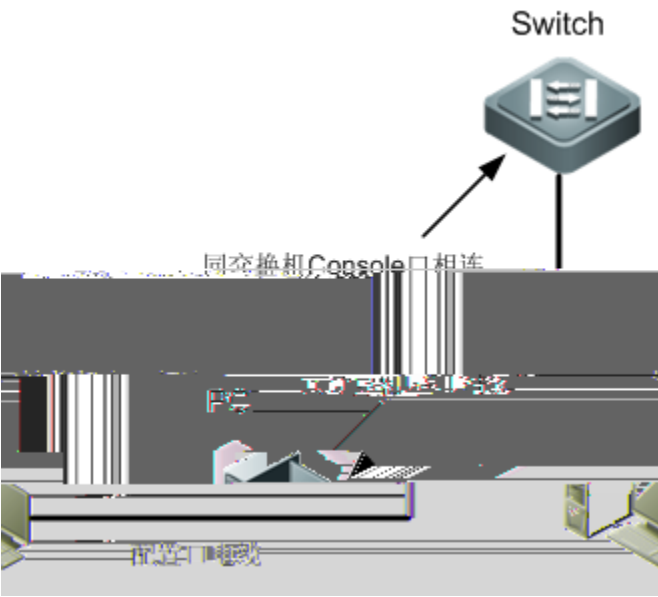



- 1) DB-9 PC
- 2) RJ45 Console

■ PC PC Windows3.1 Terminal Windows 95/98/NT/2000/XP

■ 9600 8 1


- 1) 4-2

4-2

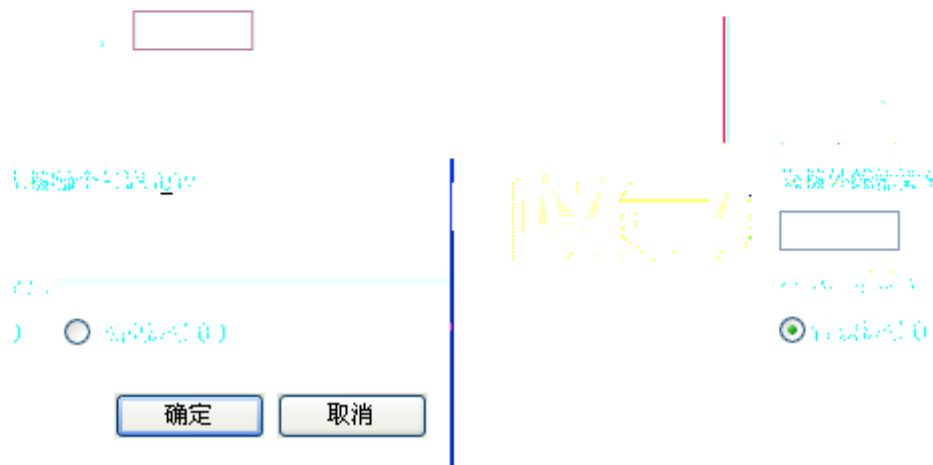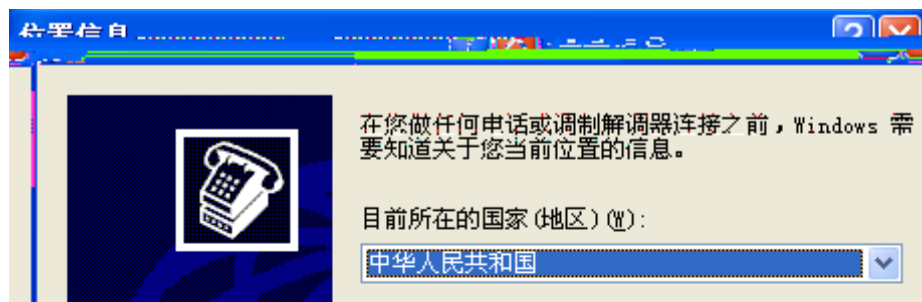


2) 4-3

4-3

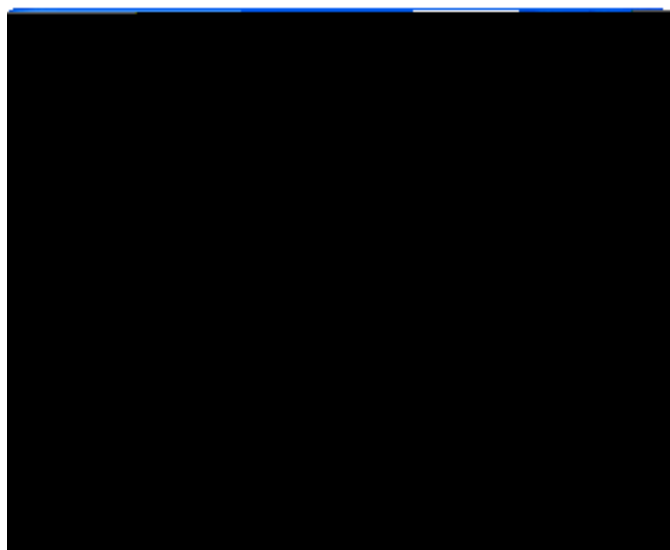

3) 4-4

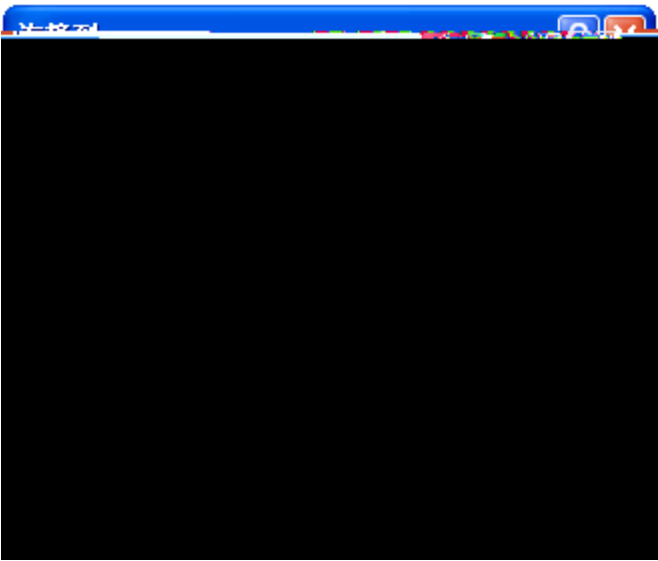

4) o | < > 4-5 o 9600


8 1

4-5



5) o 4-6

4-6

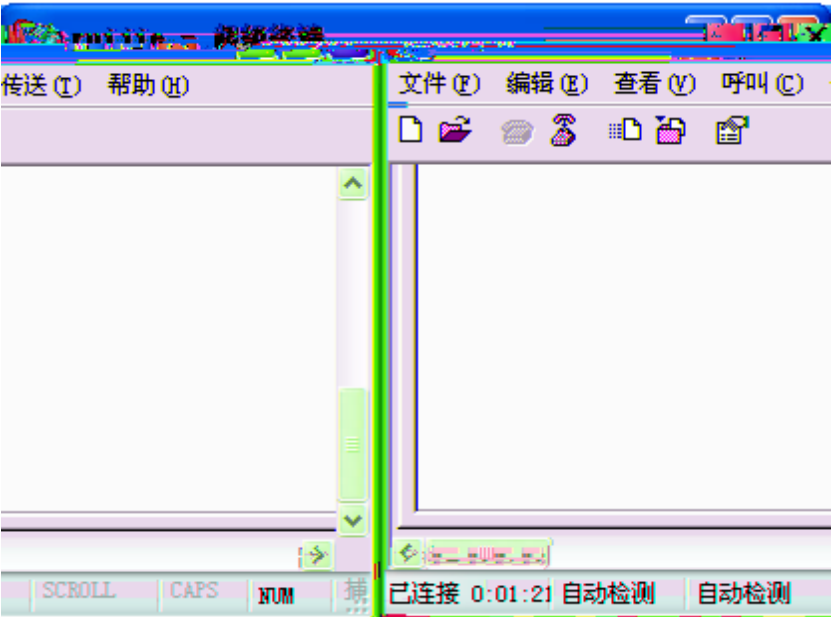

4.2

-
-
-
- 1
- ~ PC ă
-
- 4
-

5.1

CLI



5.2

■

7E

■

0

7


7E

┌

┌

6

6.1

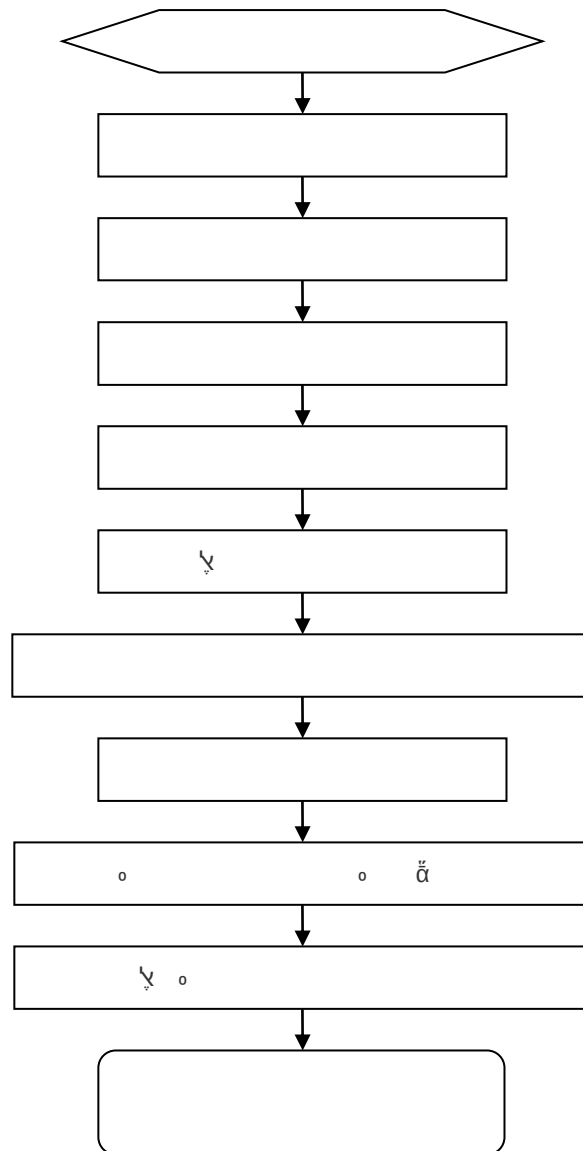


6.2

1

6

A _____

1000BASE-T/100BASE-TX/10BASE-T

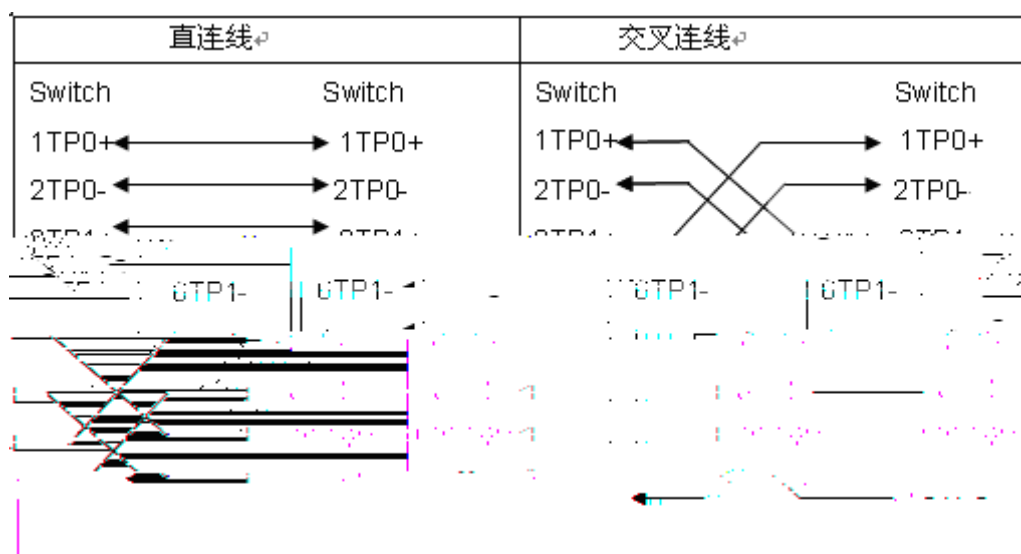
[illegible]

100BASE-TX/10BASE-T	10Mbps	100-ohm 3,4,5	100Mbps
100-ohm 5	100	100BASE-TX/10BASE-T	
A-2:			
A- 2 100BASE-TX/10BASE-T			

Pin	插座	插头
1	Input/Receive Data	Output/Transmit Data
2	Input/Receive Data	Output/Transmit Data
3	Output/Transmit Data	Input/Receive Data
6	Output/Transmit Data	Input/Receive Data
4, 5, 7, 8	Not Used	Not Used

100BASE-TX/10BASE-T 1 1 1 , A-3


A- 3 100BASE-TX/10BASE-

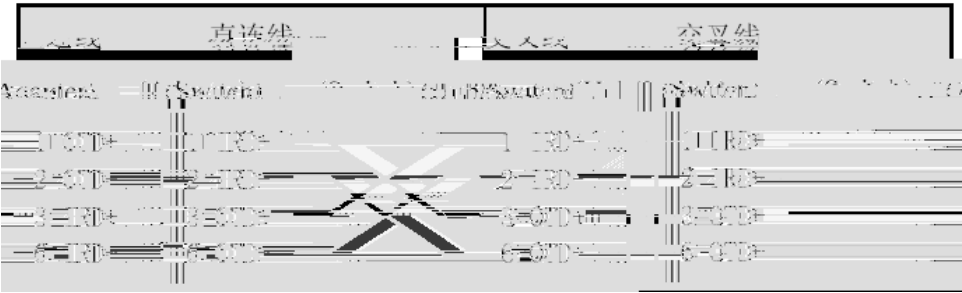

o

y

A- 4



10. *Journal of the American Medical Association*, 2000; 284: 2689-2694.

RG-S6010

	(nm)		P	(MHz · km)		min	max	min	max
--	------	--	---	------------	--	-----	-----	-----	-----


XG-SFP-SR-MM850

C —

C- 1

接地、极性检测指示灯：该
红灯亮时表明接线错（或接



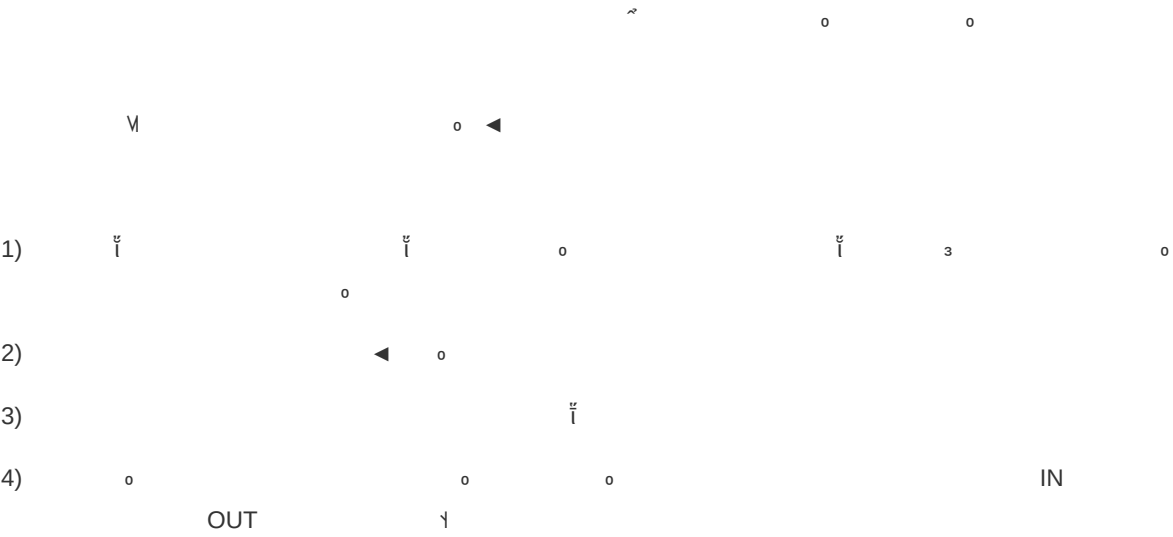


D —

RG-S6010

19

D- 3

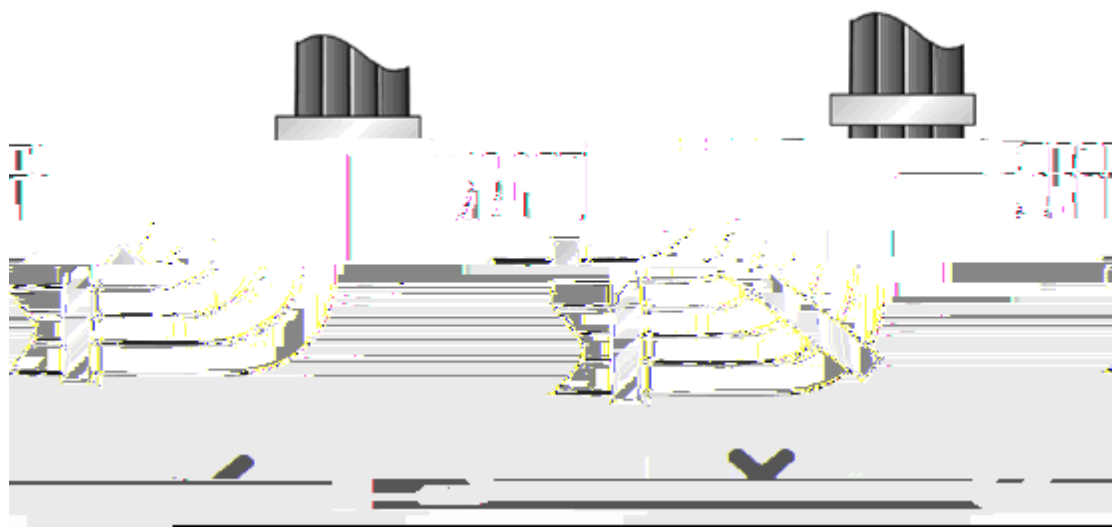

■

η

■

■

İ

z

■

Ů

D-4

D- 4



