



©2013



<http://www.ruijie.com.cn/>

	RG-WALL1600-M5100E
	1.0
	PDF

1

RG-WALL1600-M5100E

IPSec SSL VPN
IPv4 IPv6

Web

NAC SSL

RG-WALL1600-M5100E

RG-WALL1600-M5100E

1.1 RG-WALL1600-M5100E

	RG-WALL1600-M5100E
	0 to 40°C
	-25 to 70°C
	20% 90% RH
	5.6Kg
	394x432 x 44.45 L * W * H mm 1RU
	100-240 VAC, 50-60 Hz
	110 V / 3 A, 220 V / 1.5 A
/	34W/40 W
	335 BTU/h

RG-M5100E

A

RG-WALL1600-M5100E

1

3+5 Q ‡ Ö3+5 Q ‡

1 USB

RG-WALL1600-M5100E

1-2


1-2 RG-WALL1600-M5100E

以太网端口 1 - 38 (RJ-45)

千兆以太网连接

WAN 端口 1 & 2 (RJ-45)

千兆以太网连接

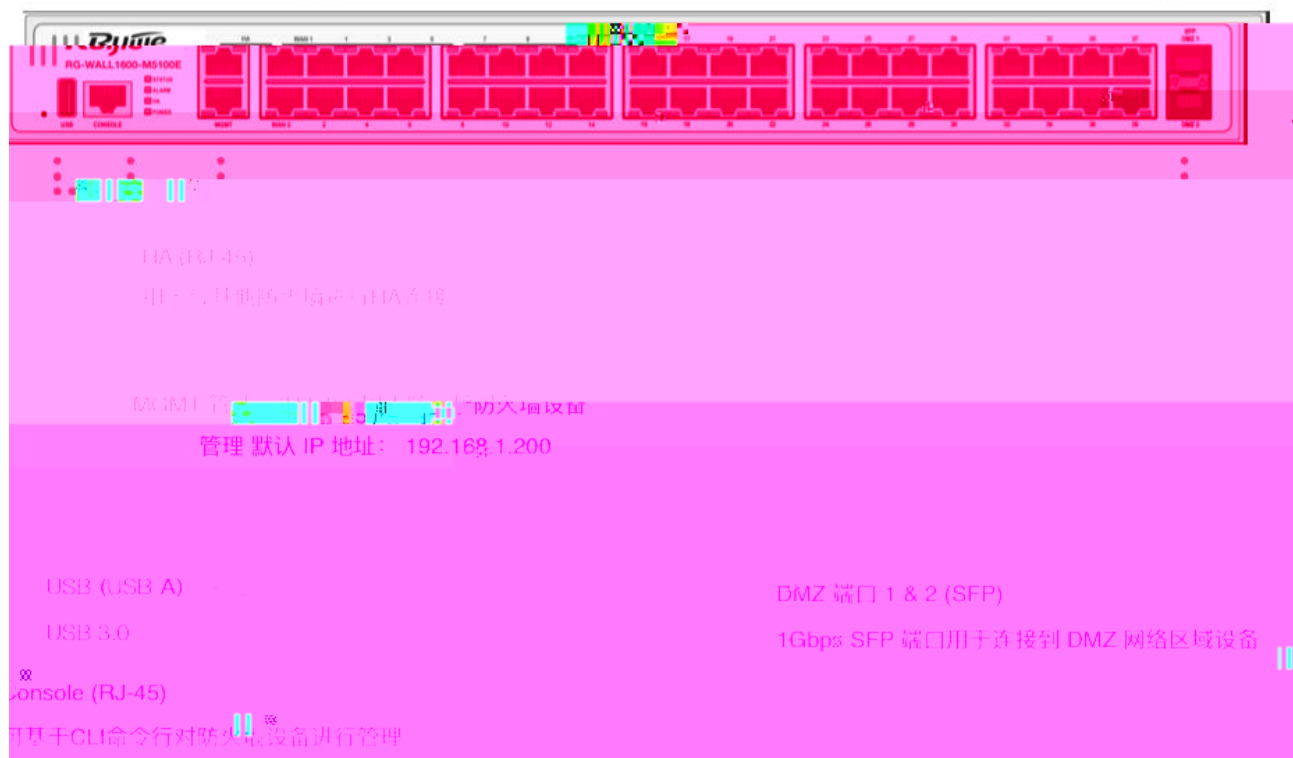

2

2.1

2.1

RG-WALL1600-M5100E

山

2.1.1

2.1.2

2.2.3

RG-WALL1600-M5100E

2.2.7 EMI

2.3

2.4

RG-WALL1600-M5100E


2.5

	2	2	USB SFP	2	Console	8	4
--	---	---	------------	---	---------	---	---

3

RG-WALL1600-M5100E

3.1

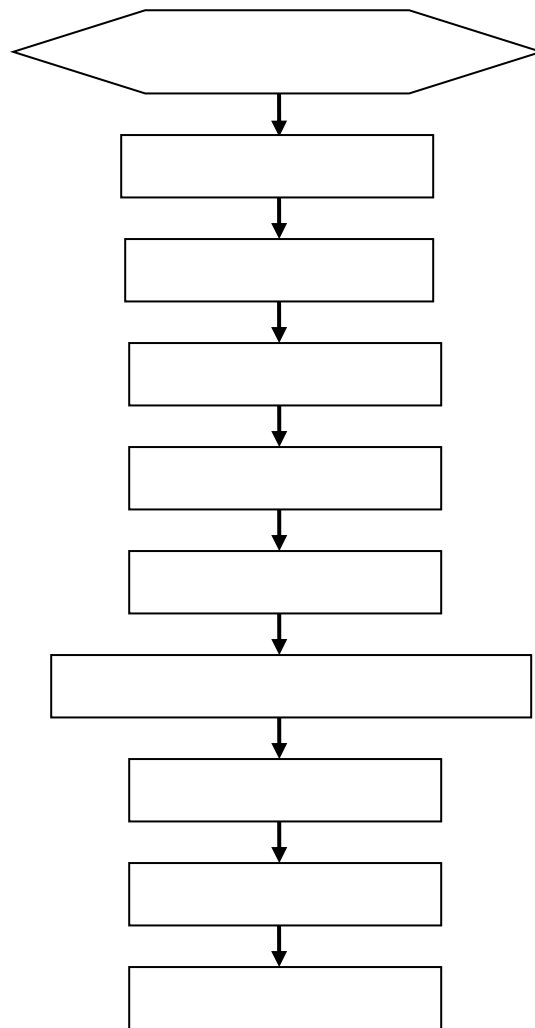

3.2

RG-WALL1600-M5100E

3.3

1)

2)

3)

4)

3.7

1)

2)

3)

3.8

3.9

SFP

SFP

SFP


4)

5)

6)

4

4.1

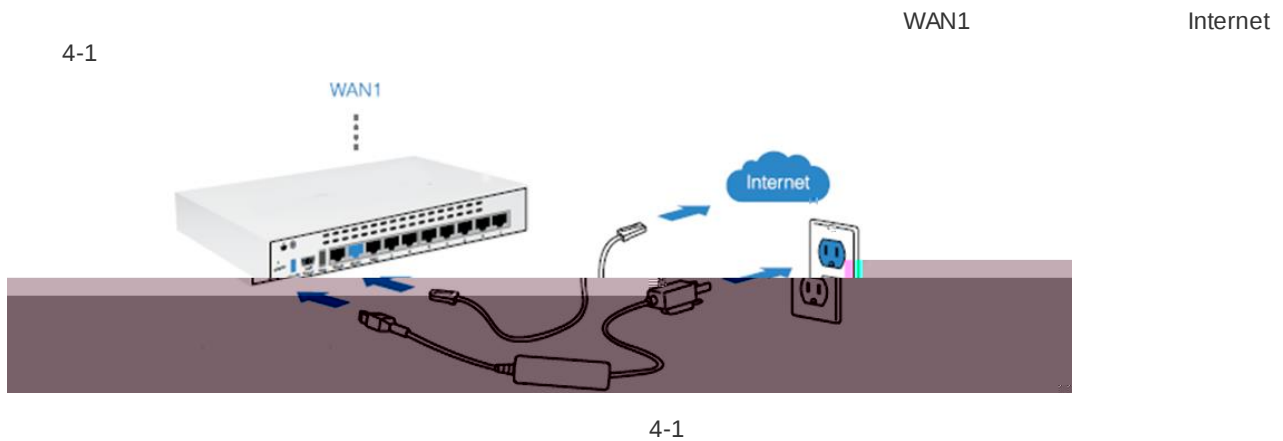

Web

LAN

PC

IP : <https://192.168.1.99>

admin

**Console**


PC

Console


12)

14

13)

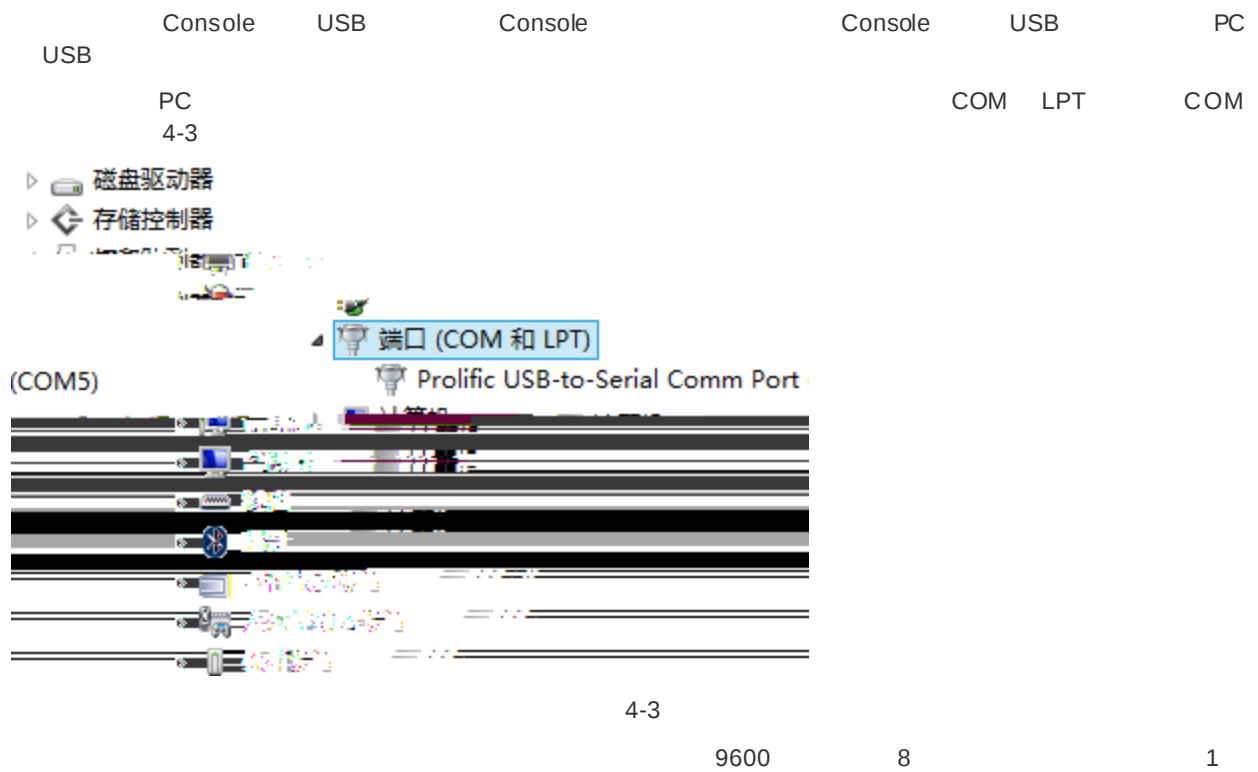

14)

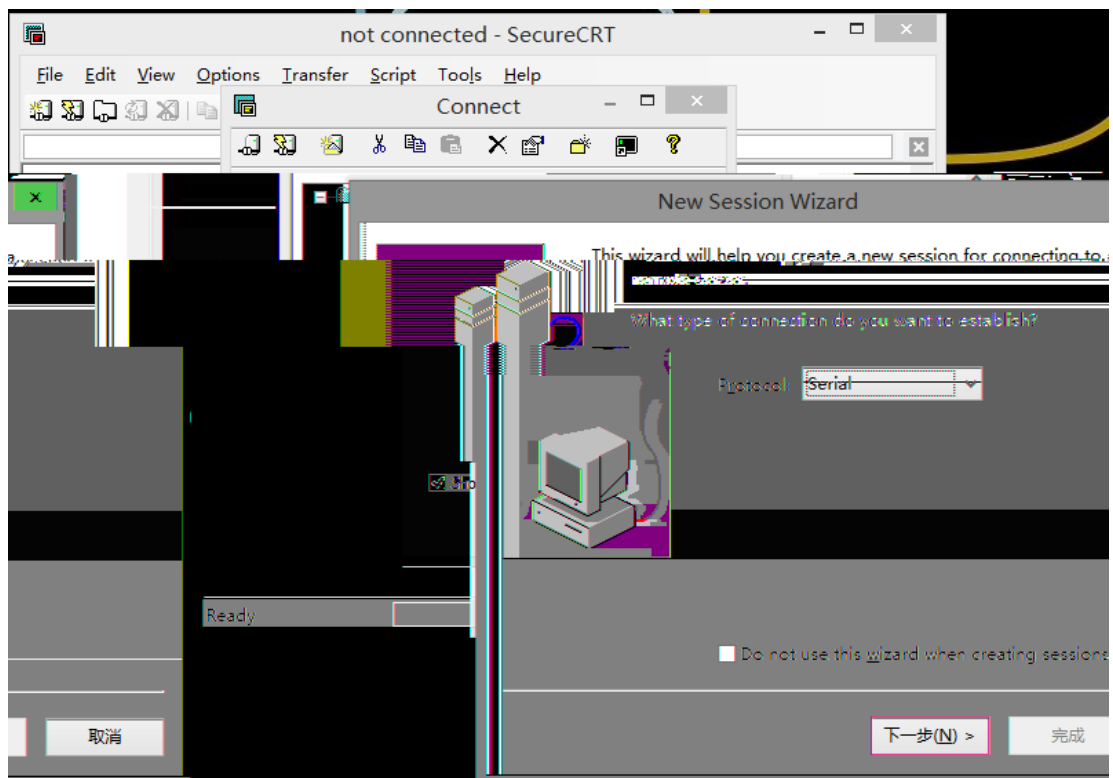

5

5.1

RG-WALL1600-M5100E

RG-WALL1600-M5100E
RG-WALL1600-M5100E

RG-WALL1600-M5100E Internet
RG-WALL1600-M5100E

Telnet

5.2

6

6.1

6.2

1

4

5 **link**

link

1

2

1310nm

1550nm

3

4

A 0 0


1000BASE-T/100BASE-TX/10BASE-T

1000BASE-T/100BASE-TX/10BASE-T

MDI/MDIX Crossover

1000BASE-T IEEE 802.3ab 100 1000BASE-T 4 100-ohm 5 5 UTP 4 STP 1000BASE-T

A-1 1000BASE-T

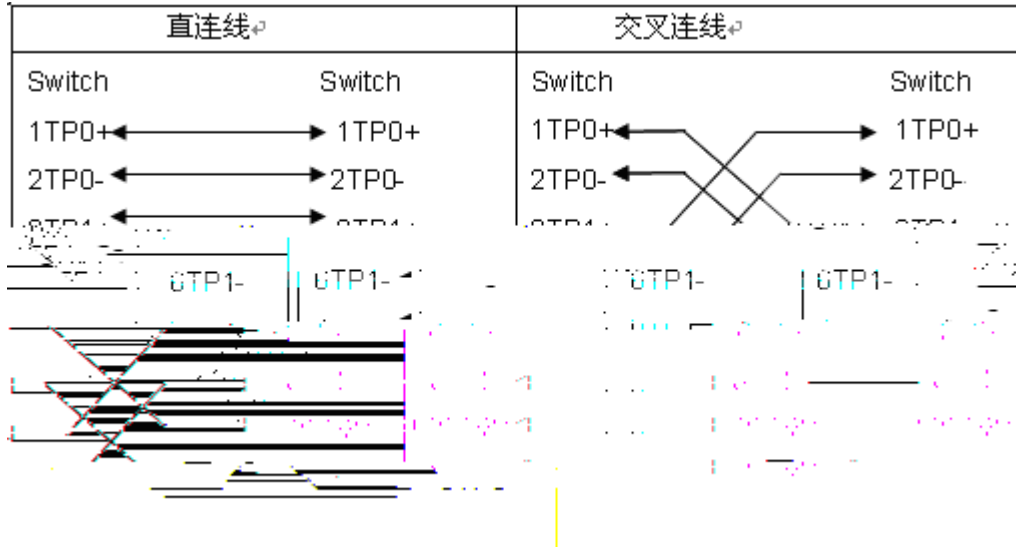

100BASE-TX/10BASE-T

100-ohm 5

100

10Mbps

100-ohm 3,4,5

100BASE-TX/10BASE-T

100Mbps

A-2 100BASE-TX/10BASE-T

Pin	插座	插头
1	Input Receive Data+	Output Transmit Data+
2	Input Receive Data-	Output Transmit Data-
3	Input Receive Data+	Output Transmit Data-
4	Input Receive Data-	Output Transmit Data+


100BASE-TX/10BASE-T

A-3 100BASE-TX/10BASE-T

直连线		交叉线	
1 IRD+	1 OTD+	1 IRD+	1 IRD+
2 IRD-	2 OTD-	2 IRD-	2 IRD-
3 OTD+	3 IRD+	3 OTD+	3 OTD+
4 OTD-	4 IRD-	4 OTD-	4 IRD-

A 4



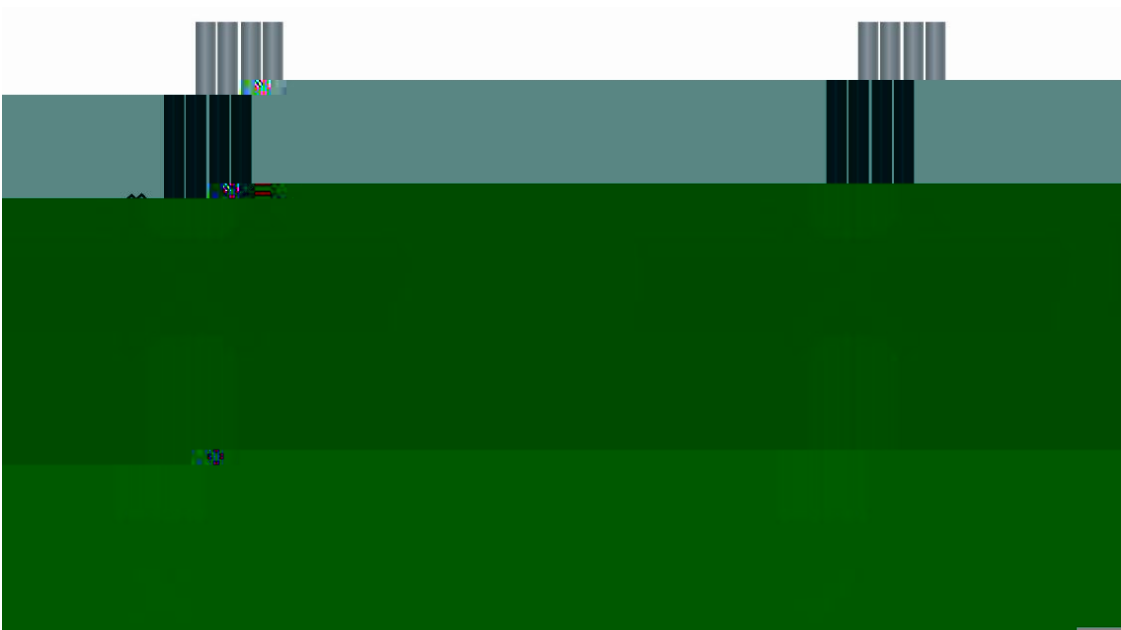

D-3

D-3



220V

-48V

D-4

D-4

mm	mm
10	80~150
10~30	150~200
30	200~300