

x ô Æ

RG-IPC ö Õ Í

1

Í Ó Ò ¢

©2015

III

¢ ¢ ¢ ¢ ¢

¢ III

¢ ¢ ¢ ¢

¢ ¢ ¢ **BGNOS®** ¢

¢ ¢ ¢ 锐捷®

III

² Á Ò ¢

III

III

III

ù ^

í î ¢

RG-IPC _1.66_Build20151217

ñ + »

-
-
-

Đ u 4

- <http://www.ruijie.com.cn/> III
- <http://webchat.ruijie.com.cn>III
- <http://www.ruijie.com.cn/service.aspx> III
- 7 24 4008-111-000
- <http://bbs.ruijie.com.cn/portal.php>
- 4008111000@ruijie.com.cn

1 $\hat{u}$

RG-IPC

III III
III 4 4
III

11000	TCP	IPC
-------	-----	-----

3.2 x © i

CD-ROM

RG-IPC

“ ”

Э RG-IPC

Ю

RG-IPC

“ ”

IP4 4 4 “ ” “ ”

 注意

- -
 -
 -
 -
 -
- RG-IPC

III


SQL Server

RG-IPC

III

RG-IPC
- Chinese_PRC_CI_AS Ł III
-

RG-IPC “ ”



- RG-IPC
- RG-IPC III

“ ” III


3.3 ÷ F å

RG-IPC RG-IPCIII

“ ” >“ ” >“ ” >“ ” >“RG-IPC ”

III

“ ” “ ” “ ” III

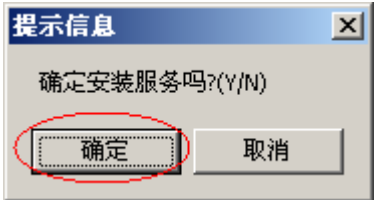

RG-IPC

RG-IPC

III


“RG-IPC” <http://127.0.0.1:8080/ipc/index.jsp> RG-IPC

- ◆ supervisor ruijieipc
- ◆ log 111111111
- ◆ admin 111111111

 注意

3 4

III

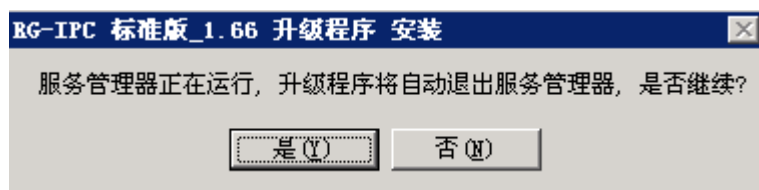



4 4



54

5



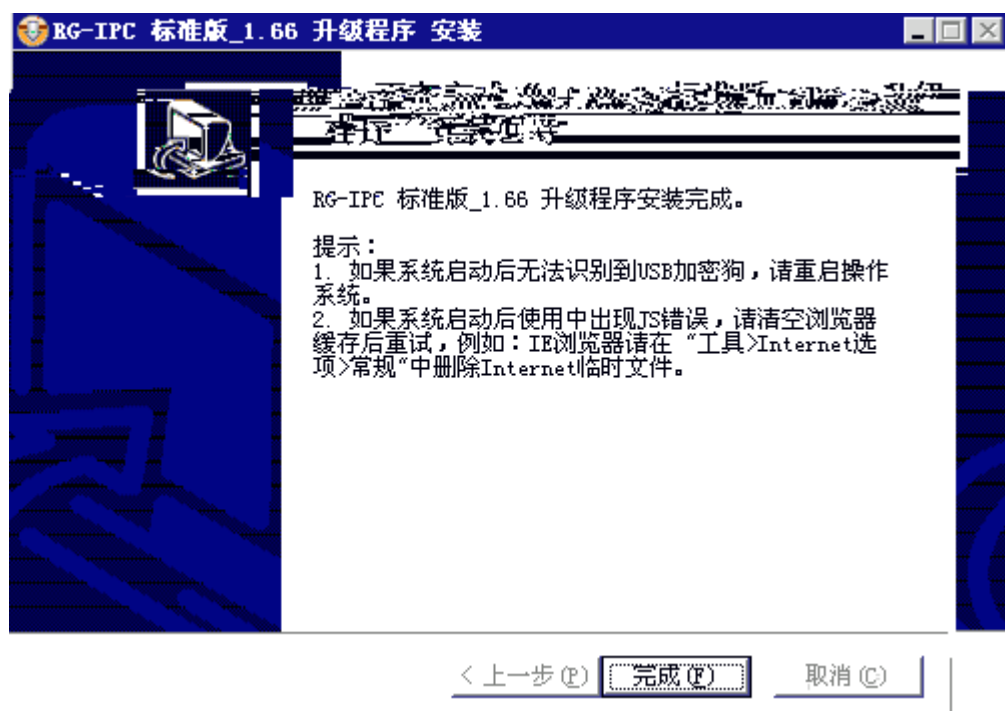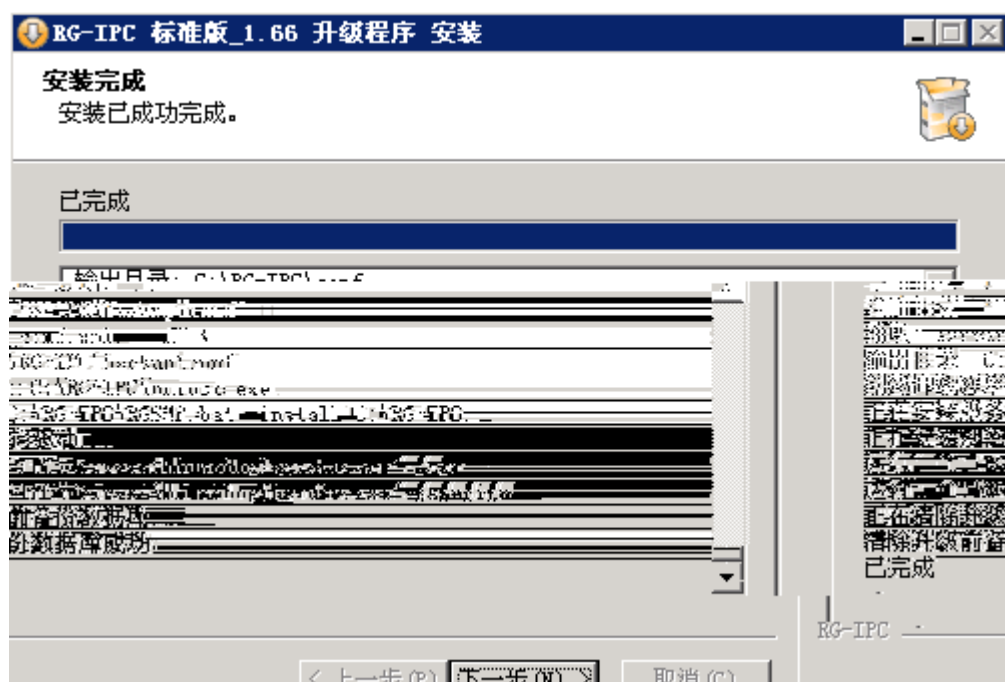

6RG- Tc 1Tj 0- Tc 1Tjw2 T331.247 0[(S)-1(MP2(PC))Tj /C2 0 1 Tj 0 Tc 02.421.113 0[<1CE108T 017529DA>6<0C30



```

16:57:46,718 INFO [ServerImpl] Server Temp Dir: C:\RG-IPC\boss\server\default\tmp
16:57:46,718 INFO [ServerImpl] Server Temp Deploy Dir: C:\RG-IPC\boss\server\default\tmp\deploy
16:57:47,469 INFO [ServerImpl] Starting Microcontainer, bootstrapURL=file:C:/RG-IPC/boss/server/default/conf/bootstrap.xml

```

WEB

