




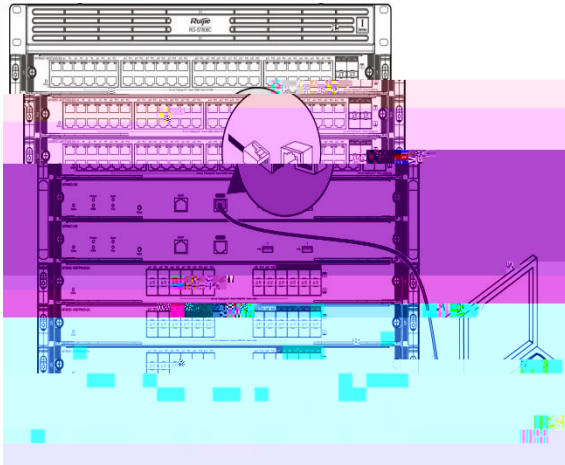

1 Console

2 Telnet/SSH

CLI

3 WEB

CLI

4 SNMP

CLI

RJ-45

RS232

Console

9

Console

COM



8

USB

1

DB-9

USB-

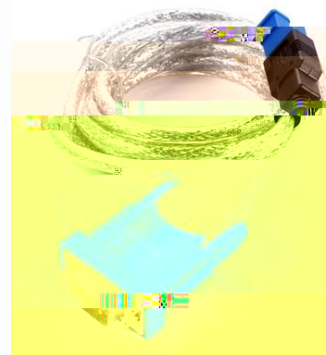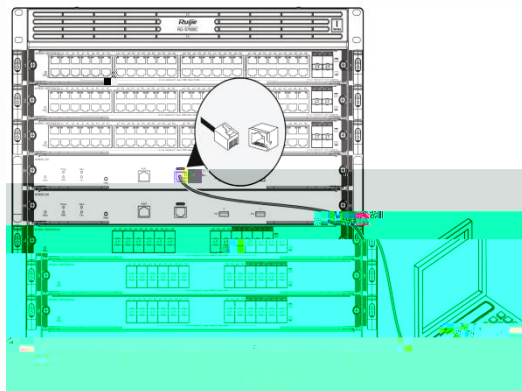


Console

I



PC

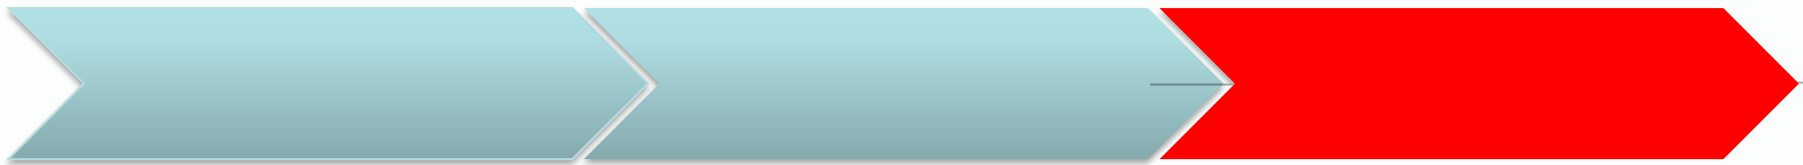

CLI

Ruijie> // :

Ruijie>en


Ruijie# //

Ruijie#config


Enter configuration commands, one per line. End with CNTL/Z.

Ruijie(config)# //


?

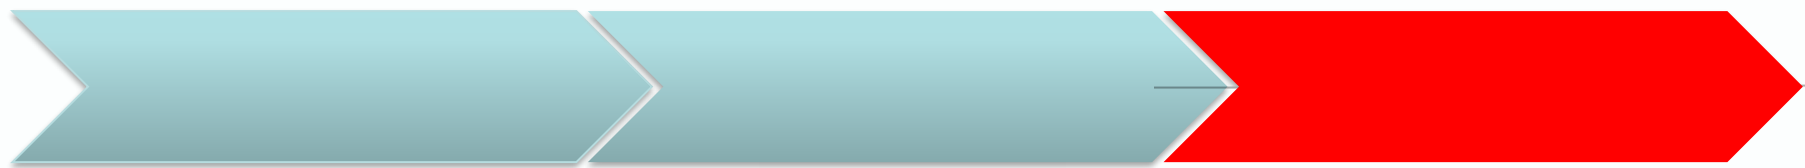


CLI

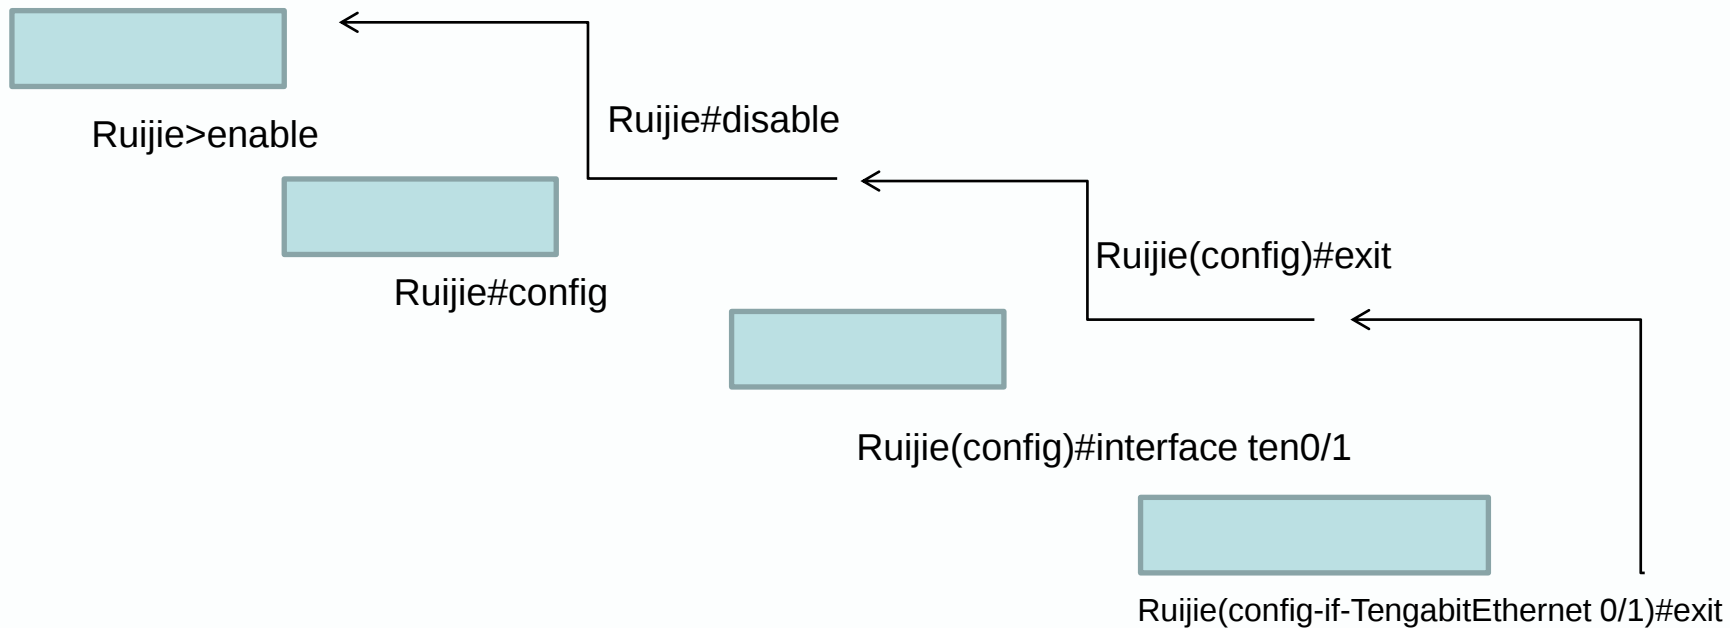

I

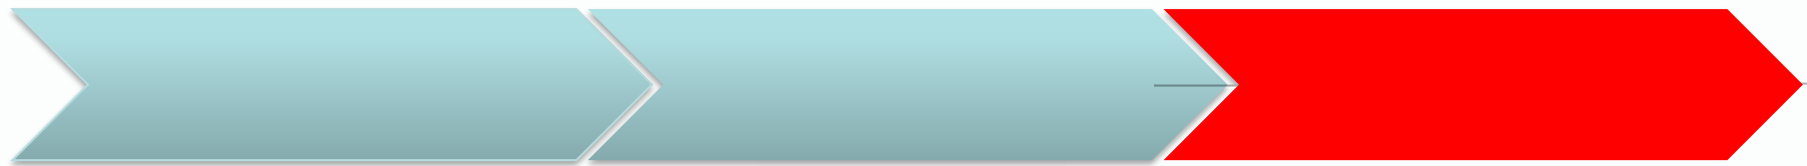

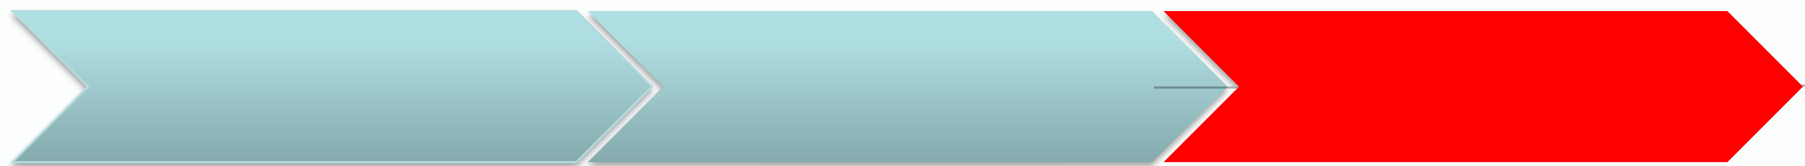

Telnet







1 U

2 FTP

3 TFTP

FTP

4 UBOOT

PPT



U FAT/FAT32

NTFS

U

S7800C

U

1

upgrade

Ruijie#dir usb0: USB

Ruijie#**upgrade** usb0:/xxxxx_install.bin

xxxx_install.bin

U

```
s7808c#show upgrade status
```

```
[slot M1]
```

```
Device type   : s78c-cm  
Status        : upgrading
```

```
[slot 1]
```

```
Device type   : ca-octeon-lc  
Status        : transmission
```

```
[slot 2]
```

```
Device type   : ca-octeon-lc  
Status        : transmission
```

```
*Jan_5 16:40:34: %7: [slot M1]:Upgrade processing is 100%  
*Jan_5 16:40:34: %7: [slot M1]:Upgrade processing is 100%  
*Jan_5 16:40:34: %7: [slot M1]:Upgrade processing is 100%  
*Jan_5 16:40:34: %7: [slot M1]:Upgrade processing is 100%  
*Jan_5 16:40:34: %7: [slot M1]:Upgrade processing is 100%  
*Jan_5 16:40:34: %7: [slot M1]:Upgrade processing is 100%  
*Jan_5 16:40:34: %7: [slot M1]:Upgrade processing is 100%  
*Jan_5 16:40:34: %7: [slot M1]:Upgrade processing is 100%  
*Jan_5 16:40:34: %7: [slot M1]:Upgrade processing is 100%  
*Jan_5 16:40:34: %7: [slot M1]:Upgrade processing is 100%
```


1

3-5

```
Ruijie#show ver detail
System description      : Ruijie High-density IPv6 100G Core Routing Switch(S7808C) By Ruijie Networks
System start time       : 2016-01-05 17:11:37
System uptime          : 0:00:04:03
System hardware version : 1.00
System software version : S7808C_RGOS 11.0(4)B2 大版本
System patch number     : NA
```



1		FTP Server		USB0	CMI	FLASH
		CMII	FLASH			
	Ruijie(config)#ftp-server username admin					
	Ruijie(config)#ftp-server password ruijie					
				---		U
	Ruijie(config)#ftp-server topdir usb0:/					
	Ruijie(config)#ftp-server timeout 300					
	Ruijie(config)#ftp-server enable					
2	PC	FTP Client	FLASHFTP		FTP	S7808C
	PC	S7808C				
3	PC	FTP		FTP Server		
4	Upgrade			USB		

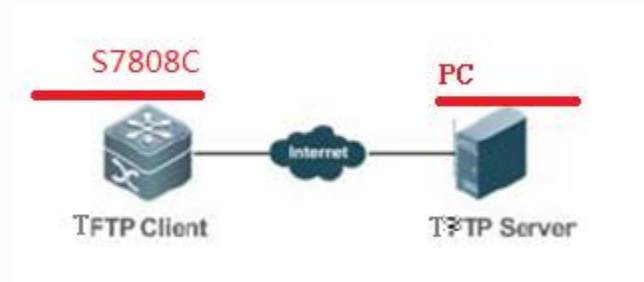

1 PC TFTP Server PC S7808C

2 S7808C TFTP Client TFTP ,
 USB CMI CMII FLASH
 Ruijie#copy tftp:192.168.1.1/S78C_RGOS11.0(4)B2_install.bin
 flash:S78C_RGOS11.0(4)B2_install.bin

3 Upgrade USB



RUNTO

Runto is a leading provider of software solutions for the construction industry. Our software is designed to help construction professionals manage their projects more efficiently and effectively. We offer a wide range of software solutions, including project management, financial management, and human resources management. Our software is used by construction professionals around the world, and we are proud to be a part of their success.