



RG-WI ock

**V1.0**

©2017

7× 24

<http://www.ruijie.com.cn/>

<http://webchat.ruijie.com.cn>

<http://www.ruijie.com.cn/service.aspx>

4008-111-000

<http://bbs.ruijie.com.cn>


[service@ruijie.com.cn](mailto:service@ruijie.com.cn)

---

---

1	.....	5
2	.....	5
3	.....	7
4	.....	9
4.1	Agent .....	9
4.2	.....	11
4.3	.....	12
5		

1

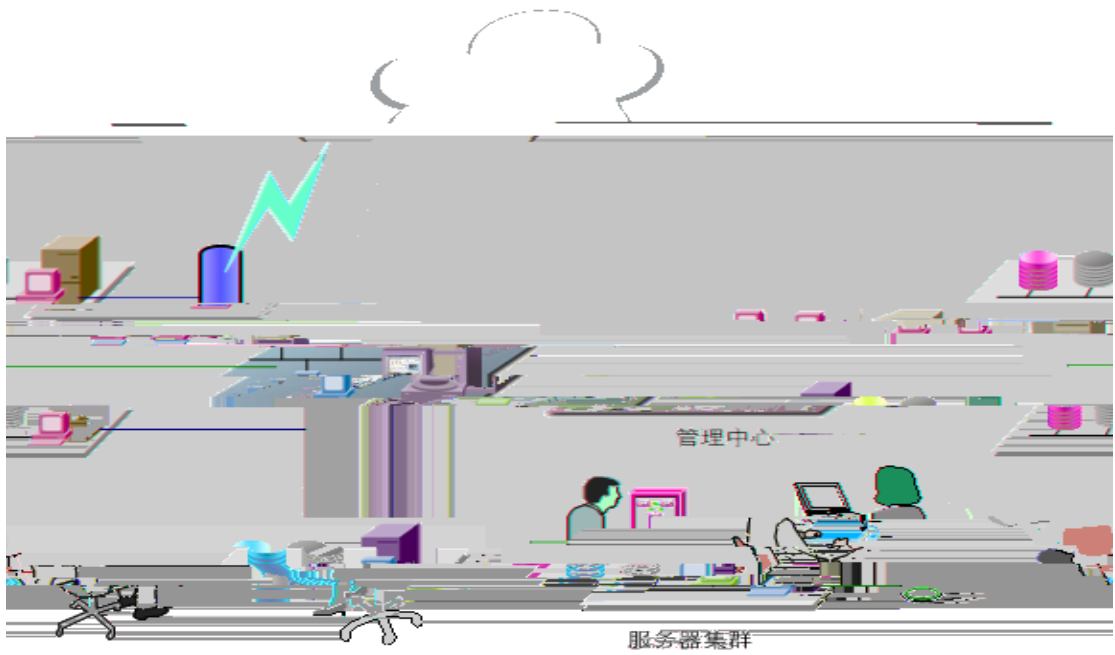

2

RG-WI ock

Web

1

1800

2

3


wi ndows

1802

1810


Wi ndows

TCP1800 UDP514  
TCP1810 TCP 1802

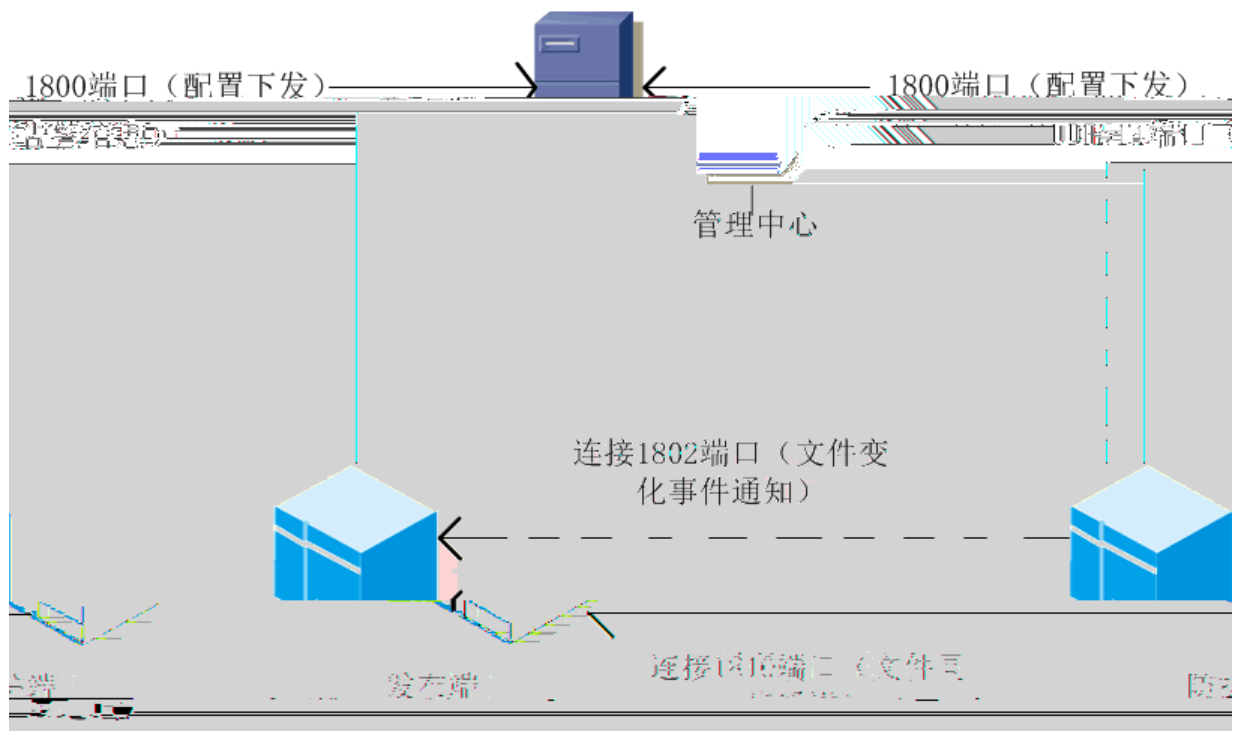

Li nux

TCP1800 UDP514  
TCP1800 TCP 1081

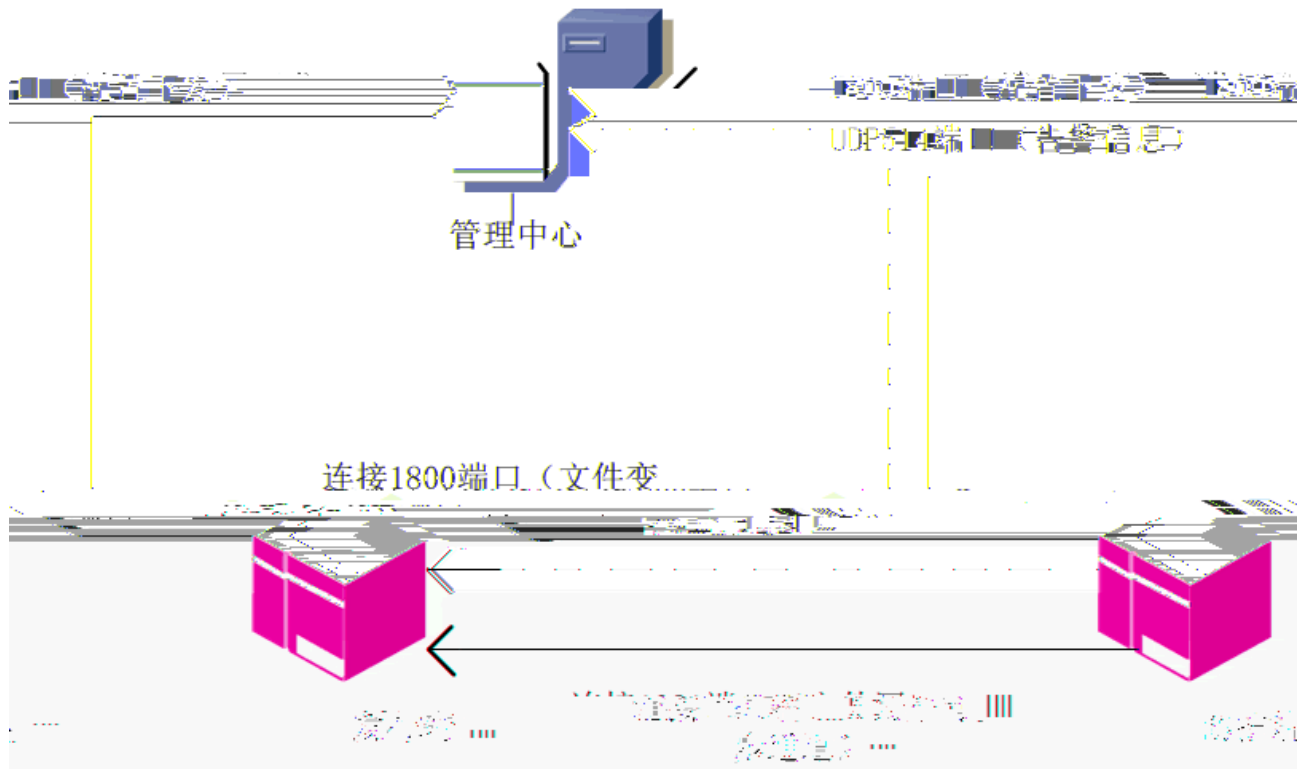


3

1 windows  
 2 windows server 2003/2008 32/64 Windows xp 32/64 Windows  
 7 32/64 windows server 2012 64  
 1G CPU: I3

1  
 2 Wl ock VC++2008 PostgreSQL  
 3 PostgreSQL PostgreSQL

1 .exe

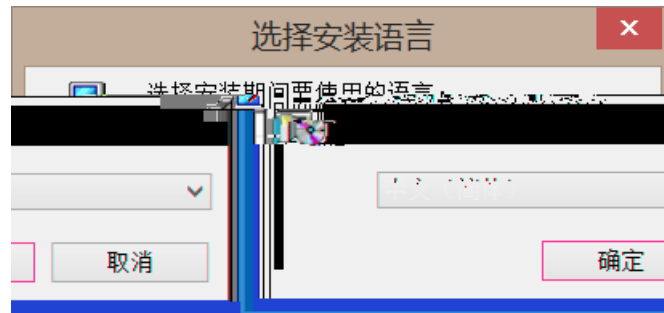

2



3

4

5 `https://127.0.0.1:1880`


`https:// IP 1880`

6

`admin admin`  
`audit audit@ruijie1970`

4

1.

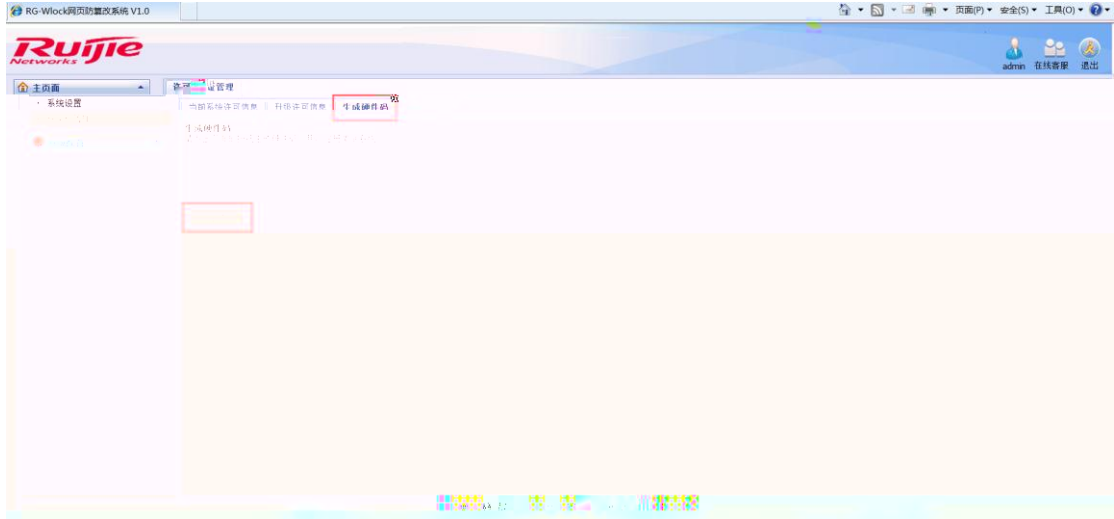

2.

## 4.1 Agent

WEB

WEB

4.1.1

Windows

Windows

Windows 2003 32	Windows 2008/Windows 2012	64
-----------------	---------------------------	----

Windows 2003	Windows 2008/Windows 2012	64
--------------	---------------------------	----

Linux

Linux

Centos/Red hat/Debian/Ubuntu


32 64

1G

CPU: I3

#### 4.1.2

->



4-1-1

#### 4.1.3 Windows


wkas.exe

WEB

wkas.exe

IP

-> ->WKAS->



IP

1800/tcp



4.3.1

WEB  
WAF

4.3.2

WEB

4.3.3

->


Web名称	IP地址	操作系统类型	是否启用	记录日志
<b>引用</b>				
<input type="checkbox"/> test-www.test.com	192.168.1.1	Windows	否	否
<b>手工添加</b>				
<input type="checkbox"/> webray	192.168.226.1	Linux	是	是

4-3-1


4.3.4

->

->

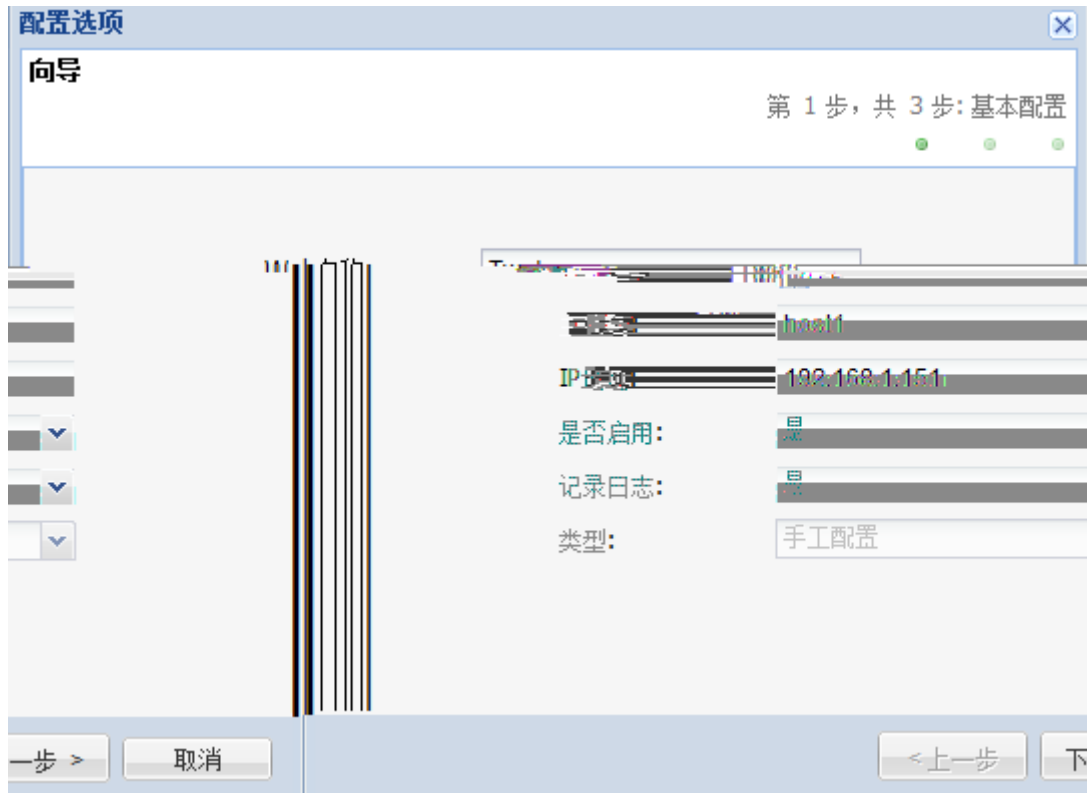

3-2-2

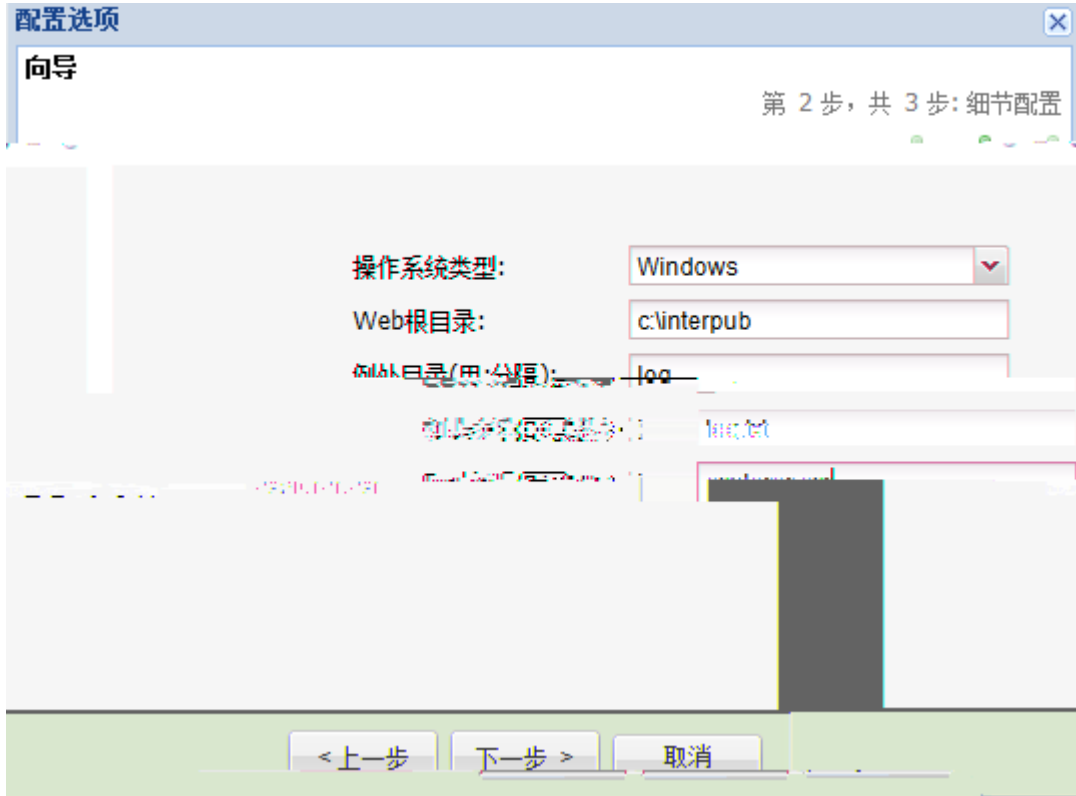

4-3-3

Web  
 IP      WEB      IP  
                     Windows    Linux  
 Web      WEB  
 Web

\*.txt; \*.exe  
 WEB







4-3-6



IP

IP

4.3.6






4-3-9



### 4.3.11

->



4-3-10

## 5


### 5.1.

SMTP

SMTP


SMTP

25.

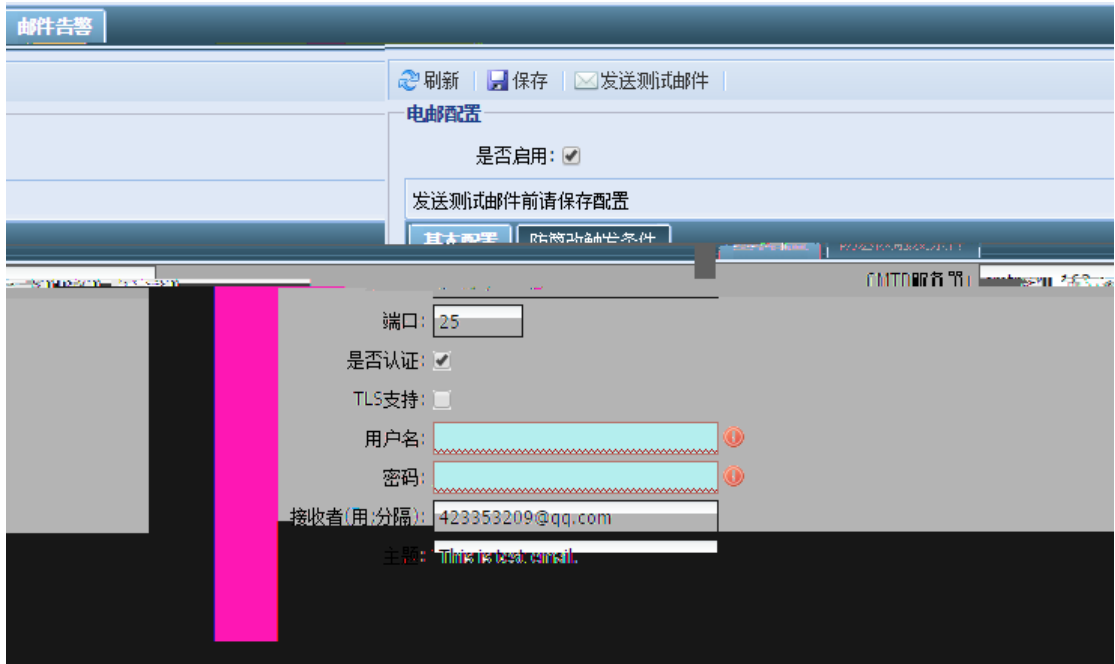

## 5.2.

DNS

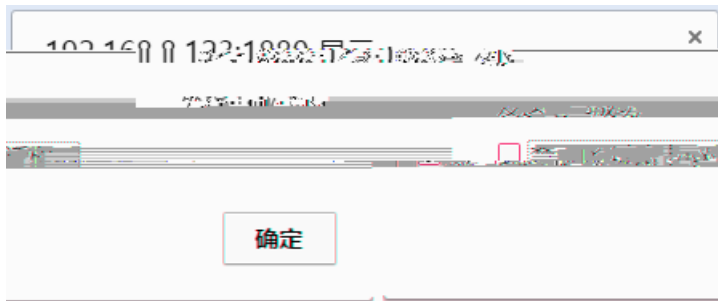



## 5.3.

### 5.3.1.



### 5.3.2.




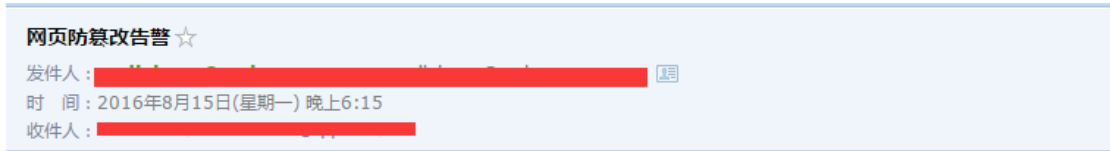


网页防篡改中防护的网站(123)中文件路径: C:\ceshi触发“新增”操作。(系统进程名: explorer.exe)

## 6

### 6.1

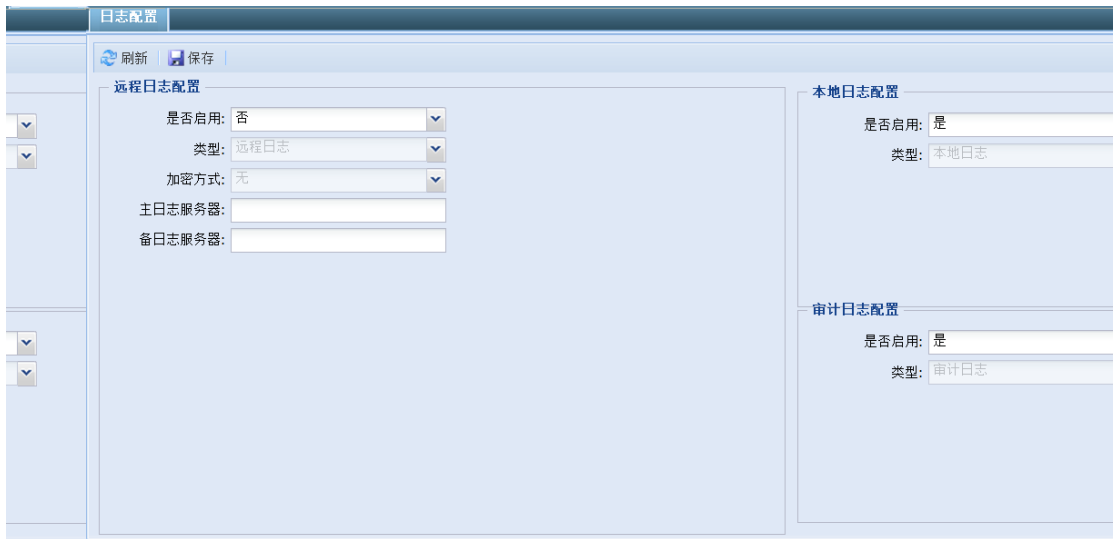

### 6.2

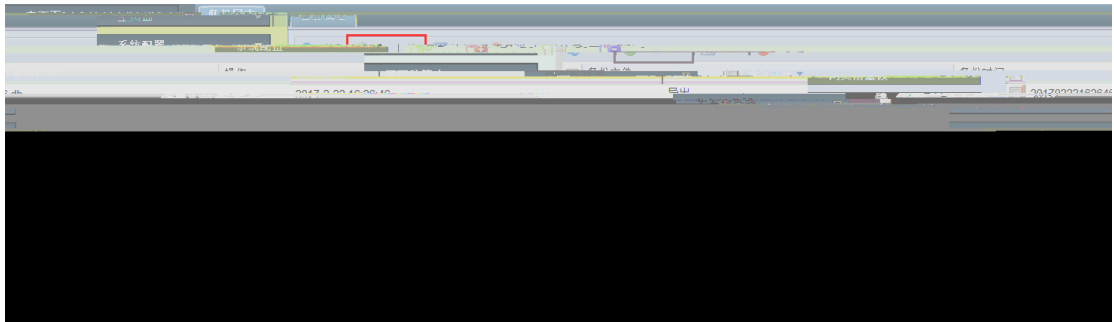

## 6.3

RG-Wlock